
INCH-POUND
MIL-PRF-39022/13C
9 April 2025
SUPERSEDING
MIL-PRF-39022/13B
26 March 2015

PERFORMANCE SPECIFICATION SHEET


CAPACITOR, FIXED, METALLIZED PAPER-PLASTIC FILM DIELECTRIC, DIRECT CURRENT (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CHR27 (INSULATED)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39022.

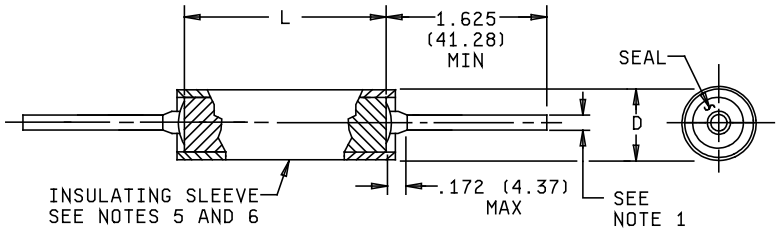

CASE FOR CIRCUIT 1



CASE FOR CIRCUIT 3



CIRCUIT DIAGRAM

NOTES:
1. Number 24 AWG wire (.020 inch ± .002 inch (0.51 mm ± 0.05 mm)) for case diameters of .175 inch (4.45 mm) and .195 (4.95 mm). Number 22 AWG wire (.025 inch ± .002 inch (0.64 mm ± 0.05 mm)) for case diameters of .235 inch (5.97 mm) and .312 (7.92 mm). Number 20 AWG wire (.032 inch ± .002 inch (0.81 mm ± 0.05 mm)) for case diameters of .400 inch (10.16 mm) and over. Number 18 AWG wire (.040 inch ± .002 inch (1.02 mm ± 0.05 mm)) for case diameter of 1.0 inch (25.4 mm).
2. See table I for additional dimensions.
3. Dimensions are in inches.
4. Metric equivalents (in millimeters) are in parenthesis and are given for general information only.
5. Insulating sleeve shall extend beyond the capacitor body but shall not exceed .031 inch (0.79 mm) on either end. Insulating sleeve thickness shall not exceed .016 inch (0.41 mm).
6. Plastic insulating sleeve shall be transparent; marking shall be placed on the capacitor case.
7. Lead length may be a minimum of 1.0 inch (25.4 mm) long for use in tape and reel packaging, when specified in the ordering data.

FIGURE 1. Dimensions and configuration.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case material: Nonmagnetic (end seal may be of magnetic material).

Capacitance value: See table I.

Capacitance tolerance: F = ± 1 percent, G = ± 2 percent, J = ± 5 percent, and K = ± 10 percent.

Rated voltage: See table I for +85°C rating; derate to 60 percent of +85°C rating for operation at +125°C.

Dielectric material: Normally polyphenylene sulfide.

Operating temperature range: -55°C to +125°C.

Failure rate level: M (1.0 percent), P (0.1 percent), R (0.01 percent), and S (0.001 percent).

Thermal shock: MIL-STD-202-107, condition A, except step 3 shall be +125°C +4°C, -0°C.

Radiographic inspection (X-ray) (FRLs R and S only): MIL-STD-202-209.

DC burn-in: In accordance with MIL-PRF-39022, table VI, qualification inspection, group I and table VII, group A inspection, subgroup 1, except 140 percent of dc rated voltage shall be applied for 48 hours minimum at +125°C +4°C, -0°C. 100 percent inspection required.

Seal:

For unimpregnated units: MIL-STD-202-112, condition B, except with mineral oil at +85°C +4°C, -0°C.

For impregnated units: One hour at rated temperature with no evidence of leakage.

Dielectric withstanding voltage (DWV): MIL-STD-202-301; 100 percent inspection required following dc burn-in.

Terminal to terminal:

AC: 100 ± 10 Hz square wave, peak-to-peak voltage, three times dc rated voltage for 60 seconds minimum, but need not exceed 800 V peak-to-peak. Square wave signal shall have a rise time of 10 to 100 microseconds and a maximum overshoot of 20 percent of rated peak voltage.

DC: 200 percent of dc rated voltage for 60 seconds, minimum.

Terminals to case (when case is not a terminal): Same requirements as specified for terminal to terminal dc DWV test.

Insulation resistance (IR): MIL-STD-202-302.

Terminal to terminal: See table III.

Terminal to case (when case is not a terminal): 50,000 megohms, minimum.

Capacitance: MIL-STD-202-305.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics and dimensions.

Part or Identifying Number (PIN) 1/	DC rated voltage	Capacitance in µF	Dimensions, nominal 2/ 3/ 4/	
			D +.015, -.005	L ± .031
M39022/13 - 473 - -	50	.047	.174	.531
M39022/13 - 563 - -	50	.056	.174	.531
M39022/13 - 683 - -	50	.068	.174	.625
M39022/13 - 823 - -	50	.082	.174	.625
M39022/13 - 104 - -	50	.10	.174	.625
M39022/13 - 124 - -	50	.12	.174	.625
M39022/13 - 154 - -	50	.15	.193	.625
M39022/13 - 184 - -	50	.18	.193	.625
M39022/13 - 224 - -	50	.22	.235	.625
M39022/13 - 274 - -	50	.27	.235	.625
M39022/13 - 334 - -	50	.33	.312	.625
M39022/13 - 394 - -	50	.39	.312	.625
M39022/13 - 474 - -	50	.47	.312	.625
M39022/13 - 564 - -	50	.56	.312	.625
M39022/13 - 684 - -	50	.68	.312	.843
M39022/13 - 824 - -	50	.82	.312	.843
M39022/13 - 105 - -	50	1.0	.312	.843
M39022/13 - 125 - -	50	1.2	.400	.843
M39022/13 - 155 - -	50	1.5	.400	.843
M39022/13 - 185 - -	50	1.8	.400	.843
M39022/13 - 205 - -	50	2.0	.400	.843
M39022/13 - 225 - -	50	2.2	.400	1.125
M39022/13 - 275 - -	50	2.7	.400	1.125
M39022/13 - 305 - -	50	3.0	.400	1.125
M39022/13 - 335 - -	50	3.3	.400	1.125
M39022/13 - 395 - -	50	3.9	.500	1.125
M39022/13 - 475 - -	50	4.7	.500	1.125
M39022/13 - 505 - -	50	5.0	.500	1.125
M39022/13 - 565 - -	50	5.6	.500	1.125
M39022/13 - 685 - -	50	6.8	.562	1.125
M39022/13 - 825 - -	50	8.2	.562	1.312
M39022/13 - 106 - -	50	10.0	.670	1.312
M39022/13 - 126 - -	50	12.0	.670	1.312
M39022/13 - 156 - -	50	15.0	.750	1.375
M39022/13 - 186 - -	50	18.0	.750	1.375
M39022/13 - 206 - -	50	20.0	.750	1.625
M39022/13 - 226 - -	50	22.0	.750	1.625
M39022/13 - 103 - -	100	.01	.174	.625
M39022/13 - 123 - -	100	.012	.174	.625
M39022/13 - 153 - -	100	.015	.174	.625
M39022/13 - 183 - -	100	.018	.174	.625
M39022/13 - 223 - -	100	.022	.174	.625
M39022/13 - 273 - -	100	.027	.174	.625
M39022/13 - 333 - -	100	.033	.174	.625
M39022/13 - 393 - -	100	.039	.174	.625
M39022/13 - 473 - -	100	.047	.193	.625
M39022/13 - 563 - -	100	.056	.193	.625
M39022/13 - 683 - -	100	.068	.235	.625
M39022/13 - 823 - -	100	.082	.235	.625
M39022/13 - 104 - -	100	.10	.235	.688
M39022/13 - 124 - -	100	.12	.235	.688

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics and dimensions - continued.

Part or Identifying Number (PIN) 1/	DC rated voltage	Capacitance in µF	Dimensions, nominal 2/ 3/ 4/	
			D +.015, -.005	L ± .031
M39022/13 - 154 - -	100	.15	.312	.625
M39022/13 - 184 - -	100	.18	.312	.625
M39022/13 - 224 - -	100	.22	.312	.688
M39022/13 - 274 - -	100	.27	.312	.688
M39022/13 - 334 - -	100	.33	.312	.812
M39022/13 - 394 - -	100	.39	.312	.812
M39022/13 - 474 - -	100	.47	.400	.688
M39022/13 - 564 - -	100	.56	.400	.812
M39022/13 - 684 - -	100	.68	.400	.812
M39022/13 - 824 - -	100	.82	.400	.938
M39022/13 - 105 - -	100	1.0	.400	.938
M39022/13 - 125 - -	100	1.2	.500	.938
M39022/13 - 155 - -	100	1.5	.500	.938
M39022/13 - 185 - -	100	1.8	.500	1.125
M39022/13 - 205 - -	100	2.0	.500	1.125
M39022/13 - 225 - -	100	2.2	.500	1.125
M39022/13 - 275 - -	100	2.7	.562	1.312
M39022/13 - 305 - -	100	3.0	.562	1.312
M39022/13 - 335 - -	100	3.3	.562	1.312
M39022/13 - 405 - -	100	4.0	.562	1.562
M39022/13 - 475 - -	100	4.7	.670	1.312
M39022/13 - 505 - -	100	5.0	.670	1.312
M39022/13 - 565 - -	100	5.6	.670	1.312
M39022/13 - 685 - -	100	6.8	.670	1.562
M39022/13 - 825 - -	100	8.2	.670	1.812
M39022/13 - 106 - -	100	10.0	.750	1.812
M39022/13 - 126 - -	100	12.0	.750	1.812
M39022/13 - 156 - -	100	15.0	1.000	1.875
M39022/13 - 186 - -	100	18.0	1.000	1.875
M39022/13 - 206 - -	100	20.0	1.000	1.875
M39022/13 - 226 - -	100	22.0	1.000	1.875
M39022/13 - 103 - -	200	.01	.174	.625
M39022/13 - 123 - -	200	.012	.174	.625
M39022/13 - 153 - -	200	.015	.174	.625
M39022/13 - 183 - -	200	.018	.193	.625
M39022/13 - 223 - -	200	.022	.193	.625
M39022/13 - 273 - -	200	.027	.235	.625
M39022/13 - 333 - -	200	.033	.235	.625
M39022/13 - 393 - -	200	.039	.235	.688
M39022/13 - 473 - -	200	.047	.235	.688
M39022/13 - 563 - -	200	.056	.312	.625
M39022/13 - 683 - -	200	.068	.312	.625
M39022/13 - 823 - -	200	.082	.312	.688
M39022/13 - 104 - -	200	.10	.312	.688
M39022/13 - 124 - -	200	.12	.312	.812
M39022/13 - 154 - -	200	.15	.312	.812
M39022/13 - 184 - -	200	.18	.400	.688
M39022/13 - 224 - -	200	.22	.400	.812
M39022/13 - 274 - -	200	.27	.400	.812
M39022/13 - 334 - -	200	.33	.400	.938
M39022/13 - 394 - -	200	.39	.400	.938

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics and dimensions - continued.

Part or Identifying Number (PIN) 1/	DC rated voltage	Capacitance in µF	Dimensions, nominal 2/ 3/ 4/	
			D +.015, -.005	L ± .031
M39022/13 - 474 - -	200	.47	.400	1.125
M39022/13 - 564 - -	200	.56	.400	1.312
M39022/13 - 684 - -	200	.68	.500	1.125
M39022/13 - 824 - -	200	.82	.500	1.125
M39022/13 - 105 - -	200	1.0	.562	1.125
M39022/13 - 125 - -	200	1.2	.562	1.312
M39022/13 - 155 - -	200	1.5	.562	1.312
M39022/13 - 185 - -	200	1.8	.562	1.812
M39022/13 - 205 - -	200	2.0	.562	1.812
M39022/13 - 225 - -	200	2.2	.562	1.812
M39022/13 - 275 - -	200	2.7	.670	1.562
M39022/13 - 305 - -	200	3.0	.750	1.562
M39022/13 - 335 - -	200	3.3	.750	1.812
M39022/13 - 405 - -	200	4.0	.750	1.812
M39022/13 - 475 - -	200	4.7	.750	2.062
M39022/13 - 505 - -	200	5.0	.750	2.062
M39022/13 - 565 - -	200	5.6	.750	2.312
M39022/13 - 605 - -	200	6.0	.750	2.312
M39022/13 - 705 - -	200	7.0	1.000	1.812
M39022/13 - 825 - -	200	8.2	1.000	2.062
M39022/13 - 106 - -	200	10.0	1.000	2.312
M39022/13 - 103 - -	300	.01	.193	.688
M39022/13 - 123 - -	300	.012	.235	.688
M39022/13 - 153 - -	300	.015	.235	.688
M39022/13 - 183 - -	300	.018	.235	.812
M39022/13 - 223 - -	300	.022	.235	.812
M39022/13 - 273 - -	300	.027	.312	.688
M39022/13 - 333 - -	300	.033	.312	.688
M39022/13 - 393 - -	300	.039	.312	.812
M39022/13 - 473 - -	300	.047	.312	.812
M39022/13 - 563 - -	300	.056	.312	.938
M39022/13 - 683 - -	300	.068	.312	.938
M39022/13 - 823 - -	300	.082	.400	.812
M39022/13 - 104 - -	300	.10	.400	.938
M39022/13 - 124 - -	300	.12	.400	.938
M39022/13 - 154 - -	300	.15	.400	1.125
M39022/13 - 184 - -	300	.18	.400	1.312
M39022/13 - 224 - -	300	.22	.400	1.312
M39022/13 - 274 - -	300	.27	.562	1.125
M39022/13 - 334 - -	300	.33	.562	1.125
M39022/13 - 394 - -	300	.39	.562	1.125
M39022/13 - 474 - -	300	.47	.562	1.562
M39022/13 - 564 - -	300	.56	.562	1.562
M39022/13 - 684 - -	300	.68	.670	1.312
M39022/13 - 824 - -	300	.82	.670	1.562
M39022/13 - 105 - -	300	1.0	.670	1.812
M39022/13 - 125 - -	300	1.2	.670	1.812
M39022/13 - 155 - -	300	1.5	.750	2.062
M39022/13 - 185 - -	300	1.8	.750	2.062
M39022/13 - 205 - -	300	2.0	.750	2.312
M39022/13 - 225 - -	300	2.2	1.000	1.812

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics and dimensions - continued.

Part or Identifying Number (PIN) 1/	DC rated voltage	Capacitance in µF	Dimensions, nominal 2/ 3/ 4/	
			D +.015, -.005	L ± .031
M39022/13 - 255 - -	300	2.5	1.000	1.812
M39022/13 - 275 - -	300	2.7	1.000	1.812
M39022/13 - 305 - -	300	3.0	1.000	2.062
M39022/13 - 335 - -	300	3.3	1.000	2.312
M39022/13 - 395 - -	300	3.9	1.000	2.562
M39022/13 - 103 - -	400	.01	.235	.688
M39022/13 - 123 - -	400	.012	.235	.812
M39022/13 - 153 - -	400	.015	.235	.812
M39022/13 - 183 - -	400	.018	.235	.812
M39022/13 - 223 - -	400	.022	.312	.688
M39022/13 - 273 - -	400	.027	.312	.812
M39022/13 - 333 - -	400	.033	.312	.812
M39022/13 - 393 - -	400	.039	.312	.938
M39022/13 - 473 - -	400	.047	.400	.812
M39022/13 - 563 - -	400	.056	.400	.812
M39022/13 - 683 - -	400	.068	.400	.938
M39022/13 - 823 - -	400	.082	.400	.938
M39022/13 - 104 - -	400	.10	.400	1.125
M39022/13 - 124 - -	400	.12	.400	1.312
M39022/13 - 154 - -	400	.15	.400	1.312
M39022/13 - 184 - -	400	.18	.562	1.125
M39022/13 - 224 - -	400	.22	.562	1.125
M39022/13 - 274 - -	400	.27	.562	1.312
M39022/13 - 334 - -	400	.33	.562	1.562
M39022/13 - 394 - -	400	.39	.562	1.562
M39022/13 - 474 - -	400	.47	.562	1.812
M39022/13 - 564 - -	400	.56	.670	1.562
M39022/13 - 684 - -	400	.68	.670	1.812
M39022/13 - 824 - -	400	.82	.750	1.812
M39022/13 - 105 - -	400	1.0	.750	2.062
M39022/13 - 125 - -	400	1.2	1.000	1.812
M39022/13 - 155 - -	400	1.5	1.000	1.812
M39022/13 - 185 - -	400	1.8	1.000	2.062
M39022/13 - 205 - -	400	2.0	1.000	2.062
M39022/13 - 225 - -	400	2.2	1.000	2.312
M39022/13 - 255 - -	400	2.5	1.000	2.562
M39022/13 - 275 - -	400	2.7	1.000	2.562
M39022/13 - 103 - -	600	.01	.312	.812
M39022/13 - 123 - -	600	.012	.312	.812
M39022/13 - 153 - -	600	.015	.400	.812
M39022/13 - 183 - -	600	.018	.400	.812
M39022/13 - 223 - -	600	.022	.400	.812
M39022/13 - 273 - -	600	.027	.400	.937
M39022/13 - 333 - -	600	.033	.400	.937
M39022/13 - 393 - -	600	.039	.400	1.125
M39022/13 - 473 - -	600	.047	.400	1.125
M39022/13 - 563 - -	600	.056	.400	1.312
M39022/13 - 683 - -	600	.068	.400	1.312
M39022/13 - 823 - -	600	.082	.562	1.125
M39022/13 - 104 - -	600	.10	.562	1.125
M39022/13 - 124 - -	600	.12	.562	1.312

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics and dimensions - continued.

Part or Identifying Number (PIN) 1/	DC rated voltage	Capacitance in µF	Dimensions, nominal 2/ 3/ 4/	
			D +.015, -.005	L ± .031
M39022/13 - 154 - -	600	.15	.562	1.312
M39022/13 - 184 - -	600	.18	.562	1.562
M39022/13 - 224 - -	600	.22	.562	1.812
M39022/13 - 274 - -	600	.27	.670	1.562
M39022/13 - 334 - -	600	.33	.670	1.812
M39022/13 - 394 - -	600	.39	.670	1.812
M39022/13 - 474 - -	600	.47	.750	1.812
M39022/13 - 564 - -	600	.56	.750	2.062
M39022/13 - 684 - -	600	.68	.750	2.312
M39022/13 - 824 - -	600	.82	1.000	1.812
M39022/13 - 105 - -	600	1.0	1.000	2.062

1/ The complete PIN will include additional symbols to indicate circuit and voltage code, capacitance tolerance (K, J, G, or F), and FRL (M, P, R, or S).
2/ Dimensions are bare case sizes (see figure 1).
3/ Dimensions are for circuit 1. For circuit 3, deduct .062 inches (1.57 mm) from length.
4/ See table II for metric equivalents.

TABLE II. Metric equivalents of decimal inches. 1/

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.531	13.49	.937	23.80	1.812	46.02
.015	0.38	.562	14.27	.938	23.83	1.875	47.63
.031	0.79	.625	15.88	1.000	25.40	2.062	52.37
.174	4.42	.670	17.02	1.062	26.97	2.124	53.95
.193	4.90	.688	17.48	1.125	28.58	2.312	58.72
.235	5.97	.750	19.05	1.312	33.32	2.562	65.07
.312	7.92	.812	20.62	1.375	34.93		
.400	10.16	.843	21.41	1.562	39.67		
.500	12.70	.874	22.20	1.625	41.28		

1/ Metric equivalents are given for general information only.

TABLE III. Insulation resistance.

In megohms:	
At +25°C ±3°C (need not exceed)	250,000
At +85°C +4°C, -0°C (need not exceed)	25,000
At +125°C +4°C, -0°C (need not exceed)	15,000
In megohms x microfarads (minimum):	
At +25°C ±3°C	100,000
At +85°C +4°C, -0°C	6,000
At +125°C +4°C, -0°C	1,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

Dissipation factor (DF):

At +25°C: 0.25 percent maximum.

At +85°C: 0.40 percent maximum.

At +125°C: 0.60 percent maximum.

Barometric pressure (reduced) for qualification only: MIL-STD-202-105, condition D (100,000 feet). 125 percent of rated voltage applied. See MIL-PRF-39022 for voltage limitations.

Vibration, high frequency: MIL-STD-202-204, condition D (20 G), 50 percent of rated voltage applied.

Salt atmosphere (corrosion): MIL-STD-202-101, condition B (48 hours), 5 percent salt solution.

Immersion: MIL-STD-202-104, condition C.

DWV:

Insulating sleeves: 4,000 V dc, minimum.

Terminal to terminal: 150 percent of rated voltage.

Terminals to case (when case is not a terminal): 200 percent of dc rated voltage.

IR:

Insulating sleeves: 100 megohms, minimum.

Terminal to terminal: 60 percent of value specified in table III.

Terminals to case (when case is not a terminal): 30,000 megohms, minimum.

Capacitance: Within ± 3 percent of initial value.

DF: Shall not exceed .28 percent.

Solderability: MIL-STD-202-208.

Shock (specified pulse): MIL-STD-202-213, condition I, 50 percent of rated voltage applied.

Resistance to soldering heat: MIL-STD-202-210, condition C, except the time shall be 10 seconds ± 1 second.

IR: See table III.

Capacitance: Within ± 3 percent of initial value.

DF: Not more than initial limit.

Moisture resistance: MIL-STD-202-106.

DWV, IR, Capacitance, and DF: Same as for immersion.

Terminal strength: MIL-STD-202-211, conditions A and D.

Condition A: Applied force 5 pounds.

Condition D: 3 rotations of 360 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

Low temperature and capacitance change with temperature:

Low temperature: -55°C +0°C, -3°C for 48 ± 4 hours with rated voltage applied.

Capacitance change with temperature:

At -55°C +0°C, -3°C: ± 2 percent.

At +85°C +4°C, -0: ± 1 percent.

At +125°C +4°C, -0°C: ± 3 percent.

Fungus: Method 508 of MIL-STD-810.

Life: MIL-STD-202-108.

Qualification:

Accelerated conditions: 140 percent of rated voltage for 2,000 +72, -0 hours at +85°C. End of life requirements as specified for rated conditions.

Rated conditions: 100 percent of rated voltage for 10,000 +96, -0 hours at +85°C.

DF (at +85°C +4°C, -0°C) between first 24 and 48 hours of test: Not greater than initial limit.

DF (at +85°C +4°C -0°C) during last 48 hours of test: 0.8 percent, maximum.

IR at rated voltage:

Insulating sleeves: 100 megohms, minimum.

Terminal to terminal: Not less than 30,000 megohm-microfarads or 75,000 megohms, minimum.

Terminals to case (when case is not a terminal): 30,000 megohms, minimum.

Capacitance: Within ± 5 percent of initial value.

DF (at +25°C ±3°C) after life: 0.5 percent maximum.

Extended life:

Accelerated conditions: 2,000 +75, -0 hours.

Rated conditions: 10,000 +96, -0 hours.

IR, Capacitance, and DF: Same requirements as for qualification life test.

+125°C verification life test: +85°C rated voltage for 2,000 +75, -0 hours at +125°C. 25 pieces representative of production shall be tested every six months.

IR, Capacitance, and DF: Same requirements as for qualification life test.

Marking: In accordance with MIL-PRF-39022.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents: In addition to MIL-PRF-39022, this document also references:

MIL-STD-202-101	MIL-STD-202-112	MIL-STD-202-213
MIL-STD-202-104	MIL-STD-202-204	MIL-STD-202-301
MIL-STD-202-105	MIL-STD-202-208	MIL-STD-202-302
MIL-STD-202-106	MIL-STD-202-209	MIL-STD-202-305
MIL-STD-202-107	MIL-STD-202-210	MIL-STD-810
MIL-STD-202-108	MIL-STD-202-211	

Custodians:
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2025-022)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:16Z
Check the source to verify that this is the current version before use.