INCH-POUND

NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-39022/1D
28 July 1993
SUPERSEDING
MIL-C-39022/1C
12 October 1970

PERFORMANCE SPECIFICATION SHEET


CAPACITORS, FIXED, METALLIZED, PAPER-PLASTIC FILM, OR PLASTIC FILM DIELECTRIC, DIRECT CURRENT, (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CHR09 (INSULATED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specifications sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39022.

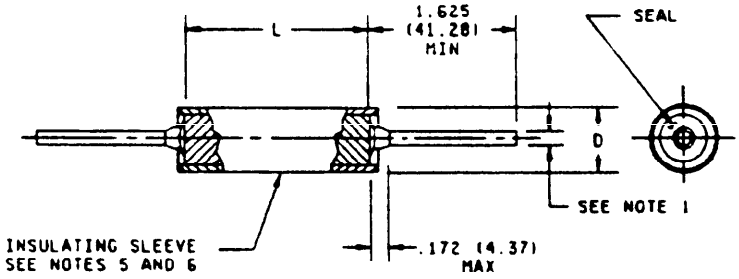

CASE FOR CIRCUIT 1



CASE FOR CIRCUIT 3



CIRCUIT DIAGRAM

(D) NOTES:
1. Number 24 AWG wire .020 ±.002 inch (0.51 ±0.05 mm) for case diameters of .175 inch (4.45 mm) and .195 inch (4.95 mm).
   Number 22 AWG wire .025 ±.002 inch (0.64 ±0.05 mm) for case diameters of .235 inch (5.97 mm) and .312 inch (7.92 mm).
   Number 20 AWG wire .032 ±.002 inch (0.81 ±0.05 mm) for case diameters of .400 inch (10.16 mm) and over.
2. See table I for additional dimensions.
3. Dimensions are in inches.
4. Metric equivalents are given for general information only.
5. Insulating sleeve shall extend beyond the capacitor body but shall not exceed .031 inch (0.79 mm) on either end. Insulating sleeve thickness shall not exceed .016 inch (0.41 mm).
6. Plastic insulating sleeve shall be transparent; marking shall be applied to the capacitor case.
7. Metric equivalents are in parentheses.
8. Lead length may be a minimum of 1-inch long for use in tape and reel packaging when specified in the ordering data.

FIGURE 1. Dimensions and configuration.

(D) denotes change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case material: Nonmagnetic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Dielectric material:

50 volt units normally polyethylene-terephthalate.

200, 400, and 600 volt units normally paper polyethylene-terephthalate.

Operating temperature range:

50 volt units: -55°C to +85°C.

200, 400, and 600 volt units: -55°C to +125°C.

(D) Failure rate level: M (1.0 percent), P (0.1 percent), R (0.01 percent), and S (0.001 percent).

Radiographic inspection (X-ray): Method 209 of MIL-STD-202.

(D) Thermal shock: Method 107 of MIL-STD-202, condition A except step 3 shall be at applicable high test temperature.

Seal: Method 112 of MIL-STD-202, condition B, or (for liquid-filled units only) 1 hour at applicable high test temperature with no evidence of leakage.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202.

Terminal to terminal: 200 percent of rated voltage.

Terminals to case (when case is not a terminal): 200 percent of rated voltage.

NOTE: For 100 percent inspection:

250 percent for not less than 5 seconds, or

200 percent for not less than 15 seconds.

Insulation resistance (IR): Method 302 of MIL-STD-202.

Terminal to terminal: See table II.

Terminals to case (when case is not a terminal): 10,000 megohms, minimum.

Capacitance (Cap.): Method 305 of MIL-STD-202.

Dissipation factor (DF): 1 percent.

Barometric pressure (reduced). Method 105 of MIL-STD-202, condition D (100,000 feet).

125 percent of rated voltage applied: See MIL-C-39022 for voltage limitations.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Electrical characteristics, dimensions, and dash numbers.

DC rated voltage	Capacitance value	Circuit diagram	Capacitance tolerance	Dimensions, nominal (inches) 1/ 2/		Dash number Failure rate level for (%/1,000 hr)			
Volts	µF		Percent ±	L ±0.062	D ±.031	M(1.0)	P(0.1)	R(0.01)	S(0.001)
50	0.018	1	5	0.750	0.175	1261	1521	1781	2041
50	0.018	1	10	0.750	0.175	1262	1522	1782	2042
50	0.018	3	5	0.688	0.175	1263	1523	1783	2043
50	0.018	3	10	0.688	0.175	1264	1524	1784	2044
50	0.022	1	5	0.750	0.175	1265	1525	1785	2045
50	0.022	1	10	0.750	0.175	1266	1526	1786	2046
50	0.022	3	5	0.688	0.175	1267	1527	1787	2047
50	0.022	3	10	0.688	0.175	1268	1528	1788	2048
50	0.027	1	5	0.750	0.175	1269	1529	1789	2049
50	0.027	1	10	0.750	0.175	1270	1530	1790	2050
50	0.027	3	5	0.688	0.175	1271	1531	1791	2051
50	0.027	3	10	0.688	0.175	1272	1532	1792	2052
50	0.033	1	5	0.750	0.175	1273	1533	1793	2053
50	0.033	1	10	0.750	0.175	1274	1534	1794	2054
50	0.033	3	5	0.688	0.175	1275	1535	1795	2055
50	0.033	3	10	0.688	0.175	1276	1536	1796	2056
50	0.039	1	5	0.750	0.195	1277	1537	1797	2057
50	0.039	1	10	0.750	0.195	1278	1538	1798	2058
50	0.039	3	5	0.688	0.195	1279	1539	1799	2059
50	0.039	3	10	0.688	0.195	1280	1540	1800	2060
50	0.047	1	5	0.750	0.195	1281	1541	1801	2061
50	0.047	1	10	0.750	0.195	1282	1542	1802	2062
50	0.047	3	5	0.688	0.195	1283	1543	1803	2063
50	0.047	3	10	0.688	0.195	1284	1544	1804	2064
50	0.056	1	5	0.750	0.235	1285	1545	1805	2065
50	0.056	1	10	0.750	0.235	1286	1546	1806	2066
50	0.056	3	5	0.688	0.235	1287	1547	1807	2067
50	0.056	3	10	0.688	0.235	1288	1548	1808	2068
50	0.068	1	5	0.750	0.235	1289	1549	1809	2069
50	0.068	1	10	0.750	0.235	1290	1550	1810	2070
50	0.068	3	5	0.688	0.235	1291	1551	1811	2071
50	0.068	3	10	0.688	0.235	1292	1552	1812	2072
50	0.082	1	5	0.750	0.235	1293	1553	1813	2073
50	0.082	1	10	0.750	0.235	1294	1554	1814	2074
50	0.082	3	5	0.688	0.235	1295	1555	1815	2075
50	0.082	3	10	0.688	0.235	1296	1556	1816	2076
50	0.10	1	5	0.750	0.235	1297	1557	1817	2077
50	0.10	1	10	0.750	0.235	1298	1558	1818	2078
50	0.10	3	5	0.688	0.235	1299	1559	1819	2079
50	0.10	3	10	0.688	0.235	1300	1560	1820	2080
50	0.12	1	5	0.750	0.235	1301	1561	1821	2081
50	0.12	1	10	0.750	0.235	1302	1562	1822	2082
50	0.12	3	5	0.688	0.235	1303	1563	1823	2083
50	0.12	3	10	0.688	0.235	1304	1564	1824	2084
50	0.15	1	5	0.875	0.312	1305	1565	1825	2085
50	0.15	1	10	0.875	0.312	1306	1566	1826	2086
50	0.15	3	5	0.812	0.312	1307	1567	1827	2087
50	0.15	3	10	0.812	0.312	1308	1568	1828	2088
50	0.18	1	5	0.875	0.312	1309	1569	1829	2089
50	0.18	1	10	0.875	0.312	1310	1570	1830	2090

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

DC rated voltage	Capacitance value	Circuit diagram	Capacitance tolerance	Dimensions, nominal (inches) 1/ 2/		Dash number Failure rate level for (%/1,000 hr)			
				L	D				
Volts	µF		Percent ±	±0.062	±0.031	M(1.0)	P(0.1)	R(0.01)	S(0.001)
50	0.18	3	5	0.812	0.312	1311	1571	1831	2091
50	0.18	3	10	0.812	0.312	1312	1572	1832	2092
50	0.22	1	5	0.875	0.312	1313	1573	1833	2093
50	0.22	1	10	0.875	0.312	1314	1574	1834	2094
50	0.22	3	5	0.812	0.312	1315	1575	1835	2095
50	0.22	3	10	0.812	0.312	1316	1576	1836	2096
50	0.27	1	5	0.875	0.312	1317	1577	1837	2097
50	0.27	1	10	0.875	0.312	1318	1578	1838	2098
50	0.27	3	5	0.812	0.312	1319	1579	1839	2099
50	0.27	3	10	0.812	0.312	1320	1580	1840	2100
50	0.33	1	5	0.875	0.312	1321	1581	1841	2101
50	0.33	1	10	0.875	0.312	1322	1582	1842	2102
50	0.33	3	5	0.812	0.312	1323	1583	1843	2103
50	0.33	3	10	0.812	0.312	1324	1584	1844	2104
50	0.39	1	5	1.125	0.312	1325	1585	1845	2105
50	0.39	1	10	1.125	0.312	1326	1586	1846	2106
50	0.39	3	5	1.062	0.312	1327	1587	1847	2107
50	0.39	3	10	1.062	0.312	1328	1588	1848	2108
50	0.47	1	5	1.125	0.312	1329	1589	1849	2109
50	0.47	1	10	1.125	0.312	1330	1590	1850	2110
50	0.47	3	5	1.062	0.312	1331	1591	1851	2111
50	0.47	3	10	1.062	0.312	1332	1592	1852	2112
50	0.56	1	5	1.125	0.400	1333	1593	1853	2113
50	0.56	1	10	1.125	0.400	1334	1594	1854	2114
50	0.56	3	5	1.062	0.400	1335	1595	1855	2115
50	0.56	3	10	1.062	0.400	1336	1596	1856	2116
50	0.68	1	5	1.125	0.400	1337	1597	1857	2117
50	0.68	1	10	1.125	0.400	1338	1598	1858	2118
50	0.68	3	5	1.062	0.400	1339	1599	1859	2119
50	0.68	3	10	1.062	0.400	1340	1600	1860	2120
50	0.82	1	5	1.125	0.400	1341	1601	1861	2121
50	0.82	1	10	1.125	0.400	1342	1602	1862	2122
50	0.82	3	5	1.062	0.400	1343	1603	1863	2123
50	0.82	3	10	1.062	0.400	1344	1604	1864	2124
50	1.0	1	5	1.125	0.400	1345	1605	1865	2125
50	1.0	1	10	1.125	0.400	1346	1606	1866	2126
50	1.0	3	5	1.062	0.400	1347	1607	1867	2127
50	1.0	3	10	1.062	0.400	1348	1608	1868	2128
50	1.2	1	5	1.375	0.400	1349	1609	1869	2129
50	1.2	1	10	1.375	0.400	1350	1610	1870	2130
50	1.2	3	5	1.312	0.400	1351	1611	1871	2131
50	1.2	3	10	1.312	0.400	1352	1612	1872	2132
50	1.5	1	5	1.125	0.500	1353	1613	1873	2133
50	1.5	1	10	1.125	0.500	1354	1614	1874	2134
50	1.5	3	5	1.062	0.500	1355	1615	1875	2135
50	1.5	3	10	1.062	0.500	1356	1616	1876	2136
50	1.8	1	5	1.375	0.500	1357	1617	1877	2137
50	1.8	1	10	1.375	0.500	1358	1618	1878	2138
50	1.8	3	5	1.312	0.500	1359	1619	1879	2139
50	1.8	3	10	1.312	0.500	1360	1620	1880	2140

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

DC rated voltage	Capacitance value	Circuit diagram	Capacitance tolerance	Dimensions, nominal (inches) 1/ 2/		Dash number Failure rate level for (%/1,000 hr)			
				L	D				
Volts	µF		Percent ±	±0.062	±0.031	M(1.0)	P(0.1)	R(0.01)	S(0.001)
50	2.2	1	5	1.125	0.562	1361	1621	1881	2141
50	2.2	1	10	1.125	0.562	1362	1622	1882	2142
50	2.2	3	5	1.062	0.562	1363	1623	1883	2143
50	2.2	3	10	1.062	0.562	1364	1624	1884	2144
50	2.7	1	5	1.375	0.562	1365	1625	1885	2145
50	2.7	1	10	1.375	0.562	1366	1626	1886	2146
50	2.7	3	5	1.312	0.562	1367	1627	1887	2147
50	2.7	3	10	1.312	0.562	1368	1628	1888	2148
50	3.3	1	5	1.375	0.562	1369	1629	1889	2149
50	3.3	1	10	1.375	0.562	1370	1630	1890	2150
50	3.3	3	5	1.312	0.562	1371	1631	1891	2151
50	3.3	3	10	1.312	0.562	1372	1632	1892	2152
50	3.9	1	5	1.625	0.562	1373	1633	1893	2153
50	3.9	1	10	1.625	0.562	1374	1634	1894	2154
50	3.9	3	5	1.562	0.562	1375	1635	1895	2155
50	3.9	3	10	1.562	0.562	1376	1636	1896	2156
50	4.7	1	5	1.750	0.562	1377	1637	1897	2157
50	4.7	1	10	1.750	0.562	1378	1638	1898	2158
50	4.7	3	5	1.688	0.562	1379	1639	1899	2159
50	4.7	3	10	1.688	0.562	1380	1640	1900	2160
50	5.6	1	5	1.875	0.562	1381	1641	1901	2161
50	5.6	1	10	1.875	0.562	1382	1642	1902	2162
50	5.6	3	5	1.812	0.562	1383	1643	1903	2163
50	5.6	3	10	1.812	0.562	1384	1644	1904	2164
50	6.8	1	5	1.625	0.672	1385	1645	1905	2165
50	6.8	1	10	1.625	0.672	1386	1646	1906	2166
50	6.8	3	5	1.562	0.672	1387	1647	1907	2167
50	6.8	3	10	1.562	0.672	1388	1648	1908	2168
50	8.2	1	5	1.875	0.672	1389	1649	1909	2169
50	8.2	1	10	1.875	0.672	1390	1650	1910	2170
50	8.2	3	5	1.812	0.672	1391	1651	1911	2171
50	8.2	3	10	1.812	0.672	1392	1652	1912	2172
50	10.0	1	5	1.875	0.750	1393	1653	1913	2173
50	10.0	1	10	1.875	0.750	1394	1654	1914	2174
50	10.0	3	5	1.812	0.750	1395	1655	1915	2175
50	10.0	3	10	1.812	0.750	1396	1656	1916	2176
50	12.0	1	5	2.375	0.750	1397	1657	1917	2177
50	12.0	1	10	2.375	0.750	1398	1658	1918	2178
50	12.0	3	5	2.312	0.750	1399	1659	1919	2179
50	12.0	3	10	2.312	0.750	1400	1660	1920	2180
200	0.10	1	10	0.844	0.312	1401	1661	1921	2186
200	0.10	1	20	0.844	0.312	1402	1662	1922	2182
200	0.10	3	10	0.781	0.312	1403	1663	1923	2183
200	0.10	3	20	0.781	0.312	1404	1664	1924	2184
200	0.22	1	10	1.125	0.312	1405	1665	1925	2185
200	0.22	1	20	1.125	0.312	1406	1666	1926	2186
200	0.22	3	10	1.062	0.312	1407	1667	1927	2187
200	0.22	3	20	1.062	0.312	1408	1668	1928	2188
200	0.47	1	10	1.125	0.400	1409	1669	1929	2189
200	0.47	1	20	1.125	0.400	1410	1670	1930	2190

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

DC rated voltage	Capacitance value	Circuit diagram	Capacitance tolerance	Dimensions, nominal (inches) 1/ 2/		Dash number Failure rate level for (%/1,000 hr)			
				L	D				
Volts	µF		Percent ±	±0.062	±0.031	M(1.0)	P(0.1)	R(0.01)	S(0.001)
200	0.47	3	10	1.062	0.400	1411	1671	1931	2191
200	0.47	3	20	1.062	0.400	1412	1672	1932	2192
200	1.0	1	10	1.125	0.562	1413	1673	1933	2193
200	1.0	1	20	1.125	0.562	1414	1674	1934	2194
200	1.0	3	10	1.062	0.562	1415	1675	1935	2195
200	1.0	3	20	1.062	0.562	1416	1676	1936	2196
200	1.5	1	10	1.844	0.562	1417	1677	1937	2197
200	1.5	1	20	1.844	0.562	1418	1678	1938	2198
200	1.5	3	10	1.781	0.562	1419	1679	1939	2199
200	1.5	3	20	1.781	0.562	1420	1680	1940	2200
200	2.2	1	10	1.844	0.562	1421	1681	1941	2201
200	2.2	1	20	1.844	0.562	1422	1682	1942	2202
200	2.2	3	10	1.781	0.562	1423	1683	1943	2203
200	2.2	3	20	1.781	0.562	1424	1684	1944	2204
200	3.3	1	10	1.875	0.670	1425	1685	1945	2205
200	3.3	1	20	1.875	0.670	1426	1686	1946	2206
200	3.3	3	10	1.812	0.670	1427	1687	1947	2207
200	3.3	3	20	1.812	0.670	1428	1688	1948	2208
200	4.7	1	10	1.875	1.000	1429	1689	1949	2209
200	4.7	1	20	1.875	1.000	1430	1690	1950	2210
200	4.7	3	10	1.812	1.000	1431	1691	1951	2211
200	4.7	3	20	1.812	1.000	1432	1692	1952	2212
200	6.8	1	10	1.875	1.000	1433	1693	1953	2213
200	6.8	1	20	1.875	1.000	1434	1694	1954	2214
200	6.8	3	10	1.812	1.000	1435	1695	1955	2215
200	6.8	3	20	1.812	1.000	1436	1696	1956	2216
200	10.0	1	10	2.375	1.000	1437	1697	1957	2217
200	10.0	1	20	2.375	1.000	1438	1698	1958	2218
200	10.0	3	10	2.312	1.000	1439	1699	1959	2219
200	10.0	3	20	2.312	1.000	1440	1700	1960	2220
200	12.0	1	10	2.625	1.000	1441	1701	1961	2221
200	12.0	1	20	2.625	1.000	1442	1702	1962	2222
200	12.0	3	10	2.562	1.000	1443	1703	1963	2223
200	12.0	3	20	2.562	1.000	1444	1704	1964	2224
400	0.047	1	10	1.125	0.312	1445	1705	1965	2225
400	0.047	1	20	1.125	0.312	1446	1706	1966	2226
400	0.047	3	10	1.062	0.312	1447	1707	1967	2227
400	0.047	3	20	1.062	0.312	1448	1708	1968	2228
400	0.10	1	10	1.125	0.400	1449	1709	1969	2229
400	0.10	1	20	1.125	0.400	1450	1710	1970	2230
400	0.10	3	10	1.062	0.400	1451	1711	1971	2231
400	0.10	3	20	1.062	0.400	1452	1712	1972	2232
400	0.22	1	10	1.125	0.562	1453	1713	1973	2233
400	0.22	1	20	1.125	0.562	1454	1714	1974	2234
400	0.22	3	10	1.062	0.562	1455	1715	1975	2235
400	0.22	3	20	1.062	0.562	1456	1716	1976	2236
400	0.47	1	10	1.625	0.562	1457	1717	1977	2237
400	0.47	1	20	1.625	0.562	1458	1718	1978	2238
400	0.47	3	10	1.562	0.562	1459	1719	1979	2239
400	0.47	3	20	1.562	0.562	1460	1720	1980	2240
400	1.0	1	10	1.875	0.750	1461	1721	1981	2241
400	1.0	1	20	1.875	0.750	1462	1722	1982	2242

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

DC rated voltage	Capacitance value	Circuit diagram	Capacitance tolerance	Dimensions, nominal (inches) 1/ 2/		Dash number Failure rate level for (%/1,000 hr)			
				L	D				
Volts	µF		Percent ±	±0.062	±0.031	M(1.0)	P(0.1)	R(0.01)	S(0.001)
400	1.0	3	10	1.812	0.750	1463	1723	1983	2243
400	1.0	3	20	1.812	0.750	1464	1724	1984	2244
400	2.2	1	10	1.875	1.000	1465	1725	1985	2245
400	2.2	1	20	1.875	1.000	1466	1726	1986	2246
400	2.2	3	10	1.812	1.000	1467	1727	1987	2247
400	2.2	3	20	1.812	1.000	1468	1728	1988	2248
400	3.3	1	10	2.625	1.000	1469	1729	1989	2249
400	3.3	1	20	2.625	1.000	1470	1730	1990	2250
400	3.3	3	10	2.562	1.000	1471	1731	1991	2251
400	3.3	3	20	2.562	1.000	1472	1732	1992	2252
600	0.01	1	10	0.812	0.312	1473	1733	1993	2253
600	0.01	1	20	0.812	0.312	1474	1734	1994	2254
600	0.01	3	10	0.750	0.312	1475	1735	1995	2255
600	0.01	3	20	0.750	0.312	1476	1736	1996	2256
600	0.022	1	10	0.812	0.312	1477	1737	1997	2257
600	0.022	1	20	0.812	0.312	1478	1738	1998	2258
600	0.022	3	10	0.750	0.312	1479	1739	1999	2259
600	0.022	3	20	0.750	0.312	1480	1740	2000	2260
600	0.047	1	10	1.125	0.400	1481	1741	2001	2261
600	0.047	1	20	1.125	0.400	1482	1742	2002	2262
600	0.047	3	10	1.062	0.400	1483	1743	2003	2263
600	0.047	3	20	1.062	0.400	1484	1744	2004	2264
600	0.10	1	10	1.125	0.500	1485	1745	2005	2265
600	0.10	1	20	1.125	0.500	1486	1746	2006	2266
600	0.10	3	10	1.062	0.500	1487	1747	2007	2267
600	0.10	3	20	1.062	0.500	1488	1748	2008	2268
600	0.15	1	10	1.125	0.562	1509	1769	2029	2289
600	0.15	1	20	1.125	0.562	1510	1770	2030	2290
600	0.15	3	10	1.062	0.562	1511	1771	2031	2291
600	0.15	3	20	1.062	0.562	1512	1772	2032	2292
600	0.22	1	10	1.375	0.562	1489	1749	2009	2269
600	0.22	1	20	1.375	0.562	1490	1750	2010	2270
600	0.22	3	10	1.312	0.562	1491	1751	2011	2271
600	0.22	3	20	1.312	0.562	1492	1752	2012	2272
600	0.47	1	10	1.625	0.670	1493	1753	2013	2273
600	0.47	1	20	1.625	0.670	1494	1754	2014	2274
600	0.47	3	10	1.562	0.670	1495	1755	2015	2275
600	0.47	3	20	1.562	0.670	1496	1756	2016	2276
600	1.0	1	10	1.844	1.000	1497	1757	2017	2277
600	1.0	1	20	1.844	1.000	1498	1758	2018	2278
600	1.0	3	10	1.781	1.000	1499	1759	2019	2279
600	1.0	3	20	1.781	1.000	1500	1760	2020	2280
600	1.5	1	10	1.875	1.000	1501	1761	2021	2281
600	1.5	1	20	1.875	1.000	1502	1762	2022	2282
600	1.5	3	10	1.812	1.000	1503	1763	2023	2283
600	1.5	3	20	1.812	1.000	1504	1764	2024	2284
600	2.2	1	10	2.625	1.000	1505	1765	2025	2285
600	2.2	1	20	2.625	1.000	1506	1766	2026	2286
600	2.2	3	10	2.562	1.000	1507	1767	2027	2287
600	2.2	3	20	2.562	1.000	1508	1768	2028	2288

1/ Dimensions shown are bare case sizes (see figure 1).
2/ Metric equivalents, see table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

TABLE II. Characteristics.

Dielectric material	Paper-polyethylene-terephthalate		Polyethylene-terephthalate
Operating temperature range	-55 to +125°C		-55 to +85°C
DC voltage rating (volts)	200 V	400 V 600 V	50
High ambient test temperature Low ambient test temperature	125° +4, -0°C -55° +0, -3°C	125° +4, -0°C -55° +0, -3°C	85° +4, -0°C 55° +0, -3°C
Megohm x microfarads (minimum) At 25°C At high ambient test temperature	 2,000 10	 2,000 40	 25,000 3,000
Insulation resistance (megohms) (need not exceed) At 25°C At high ambient test temperature	 12,000 150	 12,000 600	 50,000 6,000
Capacitance change with temperature (maximum) At -55°C At high ambient test temperature	 -10 +20	 -10 +20	 -8 percent +8 percent

TABLE III. Metric equivalents of decimal inches. 1/

Inches	mm	Inches	mm	Inches	mm
.031	0.79	.750	19.05	1.688	42.88
.062	1.57	.781	19.84	1.750	44.45
.175	4.45	.812	20.62	1.781	45.24
.195	4.95	.844	21.44	1.812	46.02
.235	5.97	.875	22.23	1.844	46.84
.312	7.92	1.000	25.40	1.875	47.63
.400	10.16	1.062	26.97	2.312	58.72
.500	12.70	1.125	28.58	2.375	60.33
.562	14.27	1.312	33.32	2.562	65.07
.670	17.02	1.375	34.93	2.625	66.68
.672	17.07	1.562	39.67		
.688	17.48	1.625	41.28		

1/ Metric equivalents are given for general information only.

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20 g's peak).

50 percent of rated voltage applied.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hours).

Salt solution: 5 percent.

Immersion: Method 104 of MIL-STD-202, condition C.

DWV:

Insulating sleeves: Greater than 4,000 volts, dc.

Terminal to terminal: 200 percent of rated voltage.

Terminals to case (when case is not a terminal): 200 percent of rated voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

IR:

Insulating sleeves: 100 megohms, minimum.

Terminal to terminal: Not less than 50 percent of value specified in table II.

Terminals to case (when case is not a terminal): 5,000 megohms, minimum.

Cap.: Within ±10 percent of initial value.

DF: Not more than 1.1 percent.

Solderability: Method 208 of MIL-STD-202.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I.

50 percent of rated voltage applied.

Moisture resistance: Method 106 of MIL-STD-202.

DWV, IR, Cap., and DF: Same as for immersion.

Terminal strength: Method 211 of MIL-STD-202, conditions A and D.

Condition A: Applied force 5 pounds.

Condition D: 3 rotations of 360 degrees.

Low temperature and cap. change with temperature:

Low temperature: -55°C +0°C, -3°C for 48 ±4 hours with rated voltage applied.

Cap. change with temperature:

-55°C +0°C, -3°C: See table II.

At applicable high test temperature: See table II.

Fungus: Method 508 of MIL-STD-810, procedure I.

(D) Resistance to soldering heat: Method 210 of MIL-STD-202, condition G (260°C ±5°C for 10 ±1 seconds).

IR: See table II.

Cap.: Within ±5 percent of initial value.

DF: Not more than 1.0 percent.

Life: Method 108 of MIL-STD-202.

Qualification:

Accelerated conditions: 140 percent of rated voltage for 2,000 +72, -0 hours.

Rated conditions: 100 percent of rated voltage for 10,000 +96, -0 hours.

DF (at applicable high test temperature) between 24 and 48 hours of test: 2 percent, maximum.

During last 48 hours of test: 2.5 percent, maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE IV. Substitutability data.

Dash number in MIL-C-39022/1D				Dash number in MIL-C-39022/1C					Type designation in MIL-C-39022/1B 1/	Type designation in MIL-C-39022/1A and /1 1/ 2/	Dash number in MIL-C-39022/1A and /1
M(1.0)	P(0.1)	R(0.01)	S(0.001)	L(5.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)			
1261	1521	1781	2041	1001	1261	1521	1781	2041	CHR09A1RA183--	CHR09A1RA183--	0001
1262	1522	1782	2042	1002	1262	1522	1782	2042	CHR09A1RA183--	CHR09A1RA183--	0002
1263	1523	1783	2043	1003	1263	1523	1783	2043	CHR09A3RA183--	CHR09A3RA183--	0003
1264	1524	1784	2044	1004	1264	1524	1784	2044	CHR09A3RA183--	CHR09A3RA183--	0004
1265	1525	1785	2045	1005	1265	1525	1785	2045	CHR09A1RA223--	CHR09A1RA223--	0005
1266	1526	1786	2046	1006	1266	1526	1786	2046	CHR09A1RA223--	CHR09A1RA223--	0006
1267	1527	1787	2047	1007	1267	1527	1787	2047	CHR09A3RA223--	CHR09A3RA223--	0007
1268	1528	1788	2048	1008	1268	1528	1788	2048	CHR09A3RA223--	CHR09A3RA223--	0008
1269	1529	1789	2049	1009	1269	1529	1789	2049	CHR09A1RA273--	CHR09A1RA273--	0009
1270	1530	1790	2050	1010	1270	1530	1790	2050	CHR09A1RA273--	CHR09A1RA273--	0010
1271	1531	1791	2051	1011	1271	1531	1791	2051	CHR09A3RA273--	CHR09A3RA273--	0011
1272	1532	1792	2052	1012	1272	1532	1792	2052	CHR09A3RA273--	CHR09A3RA273--	0012
1273	1533	1793	2053	1013	1273	1533	1793	2053	CHR09A1RA333--	CHR09A1RA333--	0013
1274	1534	1794	2054	1014	1274	1534	1794	2054	CHR09A1RA333--	CHR09A1RA333--	0014
1275	1535	1795	2055	1015	1275	1535	1795	2055	CHR09A3RA333--	CHR09A3RA333--	0015
1276	1536	1796	2056	1016	1276	1536	1796	2056	CHR09A3RA333--	CHR09A3RA333--	0016
1277	1537	1797	2057	1017	1277	1537	1797	2057	CHR09A1RA393--	CHR09A1RA393--	0017
1278	1538	1798	2058	1018	1278	1538	1798	2058	CHR09A1RA393--	CHR09A1RA393--	0018
1279	1539	1799	2059	1019	1279	1539	1799	2059	CHR09A3RA393--	CHR09A3RA393--	0019
1280	1540	1800	2060	1020	1280	1540	1800	2060	CHR09A3RA393--	CHR09A3RA393--	0020
1281	1541	1801	2061	1021	1281	1541	1801	2061	CHR09A1RA473--	CHR09A1RA473--	0021
1282	1542	1802	2062	1022	1282	1542	1802	2062	CHR09A1RA473--	CHR09A1RA473--	0022
1283	1543	1803	2063	1023	1283	1543	1803	2063	CHR09A3RA473--	CHR09A3RA473--	0023
1284	1544	1804	2064	1024	1284	1544	1804	2064	CHR09A3RA473--	CHR09A3RA473--	0024
1285	1545	1805	2065	1025	1285	1545	1805	2065	CHR09A1RA563--	CHR09A1RA563--	0025
1286	1546	1806	2066	1026	1286	1546	1806	2066	CHR09A1RA563--	CHR09A1RA563--	0026
1287	1547	1807	2067	1027	1287	1547	1807	2067	CHR09A3RA563--	CHR09A3RA563--	0027
1288	1548	1808	2068	1028	1288	1548	1808	2068	CHR09A3RA563--	CHR09A3RA563--	0028
1289	1549	1809	2069	1029	1289	1549	1809	2069	CHR09A1RA683--	CHR09A1RA683--	0029
1290	1550	1810	2070	1030	1290	1550	1810	2070	CHR09A1RA683--	CHR09A1RA683--	0030
1291	1551	1811	2071	1031	1291	1551	1811	2071	CHR09A3RA683--	CHR09A3RA683--	0031
1292	1552	1812	2072	1032	1292	1552	1812	2072	CHR09A3RA683--	CHR09A3RA683--	0032
1293	1553	1813	2073	1033	1293	1553	1813	2073	CHR09A1RA823--	CHR09A1RA823--	0033
1294	1554	1814	2074	1034	1294	1554	1814	2074	CHR09A1RA823--	CHR09A1RA823--	0034
1295	1555	1815	2075	1035	1295	1555	1815	2075	CHR09A3RA823--	CHR09A3RA823--	0035
1296	1556	1816	2076	1036	1296	1556	1816	2076	CHR09A3RA823--	CHR09A3RA823--	0036
1297	1557	1817	2077	1037	1297	1557	1817	2077	CHR09A1RA104--	CHR09A1RA104--	0037
1298	1558	1818	2078	1038	1298	1558	1818	2078	CHR09A1RA104--	CHR09A1RA104--	0038
1299	1559	1819	2079	1039	1299	1559	1819	2079	CHR09A3RA104--	CHR09A3RA104--	0039
1300	1560	1820	2080	1040	1300	1560	1820	2080	CHR09A3RA104--	CHR09A3RA104--	0040
1301	1561	1821	2081	1041	1301	1561	1821	2081	CHR09A1RA124--		
1302	1562	1822	2082	1042	1302	1562	1822	2082	CHR09A1RA124--		
1303	1563	1823	2083	1043	1303	1563	1823	2083	CHR09A3RA124--		
1304	1564	1824	2084	1044	1304	1564	1824	2084	CHR09A3RA124--		
1305	1565	1825	2085	1045	1305	1565	1825	2085	CHR09A1RA154--		
1306	1566	1826	2086	1046	1306	1566	1826	2086	CHR09A1RA154--		
1307	1567	1827	2087	1047	1307	1567	1827	2087	CHR09A3RA154--		
1308	1568	1828	2088	1048	1308	1568	1828	2088	CHR09A3RA154--		
1309	1569	1829	2089	1049	1309	1569	1829	2089	CHR09A1RA184--	CHR09A1RA184--	0041
1310	1570	1830	2090	1050	1310	1570	1830	2090	CHR09A1RA184--	CHR09A1RA184--	0042

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE IV. Substitutability data - Continued.

Dash number in MIL-C-39022/1D				Dash number in MIL-C-39022/1C					Type designation in MIL-C-39022/1B 1/	Type designation in MIL-C-39022/1A and /1 1/ 2/	Dash number in MIL-C-39022/1A and /1
M(1.0)	P(0.1)	R(0.01)	S(0.001)	L(5.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)			
1311	1571	1831	2091	1051	1311	1571	1831	2091	CHR09A3RA184--	CHR09A3RA184--	0043
1312	1572	1832	2092	1052	1312	1572	1832	2092	CHR09A3RA184--	CHR09A3RA184--	0044
1313	1573	1833	2093	1053	1313	1573	1833	2093	CHR09A1RA224--	CHR09A1RA224--	0045
1314	1574	1834	2094	1054	1314	1574	1834	2094	CHR09A1RA224--	CHR09A1RA224--	0046
1315	1575	1835	2095	1055	1315	1575	1835	2095	CHR09A3RA224--	CHR09A3RA224--	0047
1316	1576	1836	2096	1056	1316	1576	1836	2096	CHR09A3RA224--	CHR09A3RA224--	0048
1317	1577	1837	2097	1057	1317	1577	1837	2097	CHR09A1RA274--	CHR09A1RA274--	0049
1318	1578	1838	2098	1058	1318	1578	1838	2098	CHR09A1RA274--	CHR09A1RA274--	0050
1319	1579	1839	2099	1059	1319	1579	1839	2099	CHR09A3RA274--	CHR09A3RA274--	0051
1320	1580	1840	2100	1060	1320	1580	1840	2100	CHR09A3RA274--	CHR09A3RA274--	0052
1321	1581	1841	2101	1061	1321	1581	1841	2101	CHR09A1RA334--	CHR09A1RA334--	0053
1322	1582	1842	2102	1062	1322	1582	1842	2102	CHR09A1RA334--	CHR09A1RA334--	0054
1323	1583	1843	2103	1063	1323	1583	1843	2103	CHR09A3RA334--	CHR09A3RA334--	0055
1324	1584	1844	2104	1064	1324	1584	1844	2104	CHR09A3RA334--	CHR09A3RA334--	0056
1325	1585	1845	2105	1065	1325	1585	1845	2105	CHR09A1RA394--	CHR09A1RA394--	0057
1326	1586	1846	2106	1066	1326	1586	1846	2106	CHR09A1RA394--	CHR09A1RA394--	0058
1327	1587	1847	2107	1067	1327	1587	1847	2107	CHR09A3RA394--	CHR09A3RA394--	0059
1328	1588	1848	2108	1068	1328	1588	1848	2108	CHR09A3RA394--	CHR09A3RA394--	0060
1329	1589	1849	2109	1069	1329	1589	1849	2109	CHR09A1RA474--	CHR09A1RA474--	0061
1330	1590	1850	2110	1070	1330	1590	1850	2110	CHR09A1RA474--	CHR09A1RA474--	0062
1331	1591	1851	2111	1071	1331	1591	1851	2111	CHR09A3RA474--	CHR09A3RA474--	0063
1332	1592	1852	2112	1072	1332	1592	1852	2112	CHR09A3RA474--	CHR09A3RA474--	0064
1333	1593	1853	2113	1073	1333	1593	1853	2113	CHR09A1RA564--	CHR09A1RA564--	0065
1334	1594	1854	2114	1074	1334	1594	1854	2114	CHR09A1RA564--	CHR09A1RA564--	0066
1335	1595	1855	2115	1075	1335	1595	1855	2115	CHR09A3RA564--	CHR09A3RA564--	0067
1336	1596	1856	2116	1076	1336	1596	1856	2116	CHR09A3RA564--	CHR09A3RA564--	0068
1337	1597	1857	2117	1077	1337	1597	1857	2117	CHR09A1RA684--	CHR09A1RA684--	0069
1338	1598	1858	2118	1078	1338	1598	1858	2118	CHR09A1RA684--	CHR09A1RA684--	0070
1339	1599	1859	2119	1079	1339	1599	1859	2119	CHR09A3RA684--	CHR09A3RA684--	0071
1340	1600	1860	2120	1080	1340	1600	1860	2120	CHR09A3RA684--	CHR09A3RA684--	0072
1341	1601	1861	2121	1081	1341	1601	1861	2121	CHR09A1RA824--	CHR09A1RA824--	0073
1342	1602	1862	2122	1082	1342	1602	1862	2122	CHR09A1RA824--	CHR09A1RA824--	0074
1343	1603	1863	2123	1083	1343	1603	1863	2123	CHR09A3RA824--	CHR09A3RA824--	0075
1344	1604	1864	2124	1084	1344	1604	1864	2124	CHR09A3RA824--	CHR09A3RA824--	0076
1345	1605	1865	2125	1085	1345	1605	1865	2125	CHR09A1RA105--	CHR09A1RA105--	0077
1346	1606	1866	2126	1086	1346	1606	1866	2126	CHR09A1RA105--	CHR09A1RA105--	0078
1347	1607	1867	2127	1087	1347	1607	1867	2127	CHR09A3RA105--	CHR09A3RA105--	0079
1348	1608	1868	2128	1088	1348	1608	1868	2128	CHR09A3RA105--	CHR09A3RA105--	0080
1349	1609	1869	2129	1089	1349	1609	1869	2129	CHR09A1RA125--		
1350	1610	1870	2130	1090	1350	1610	1870	2130	CHR09A1RA125--		
1351	1611	1871	2131	1091	1351	1611	1871	2131	CHR09A3RA125--		
1352	1612	1872	2132	1092	1352	1612	1872	2132	CHR09A3RA125--		
1353	1613	1873	2133	1093	1353	1613	1873	2133	CHR09A1RA155--	CHR09A1RA155--	0081
1354	1614	1874	2134	1094	1354	1614	1874	2134	CHR09A1RA155--	CHR09A1RA155--	0082
1355	1615	1875	2135	1095	1355	1615	1875	2135	CHR09A3RA155--	CHR09A3RA155--	0083
1356	1616	1876	2136	1096	1356	1616	1876	2136	CHR09A3RA155--	CHR09A3RA155--	0084
1357	1617	1877	2137	1097	1357	1617	1877	2137	CHR09A1RA185--		
1358	1618	1878	2138	1098	1358	1618	1878	2138	CHR09A1RA185--		
1359	1619	1879	2139	1099	1359	1619	1879	2139	CHR09A3RA185--		
1360	1620	1880	2140	1100	1360	1620	1880	2140	CHR09A3RA185--		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE IV. Substitutability data - Continued.

Dash number in MIL-C-39022/1D				Dash number in MIL-C-39022/1C					Type designation in MIL-C-39022/1B 1/	Type designation in MIL-C-39022/1A and /1 1/ 2/	Dash number in MIL-C-39022/1A and /1
M(1.0)	P(0.1)	R(0.01)	S(0.001)	L(5.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)			
1361	1621	1881	2141	1101	1361	1621	1881	2141	CHR09A1RA225--		
1362	1622	1882	2142	1102	1362	1622	1882	2142	CHR09A1RA225--		
1363	1623	1883	2143	1103	1363	1623	1883	2143	CHR09A3RA225--		
1364	1624	1884	2144	1104	1364	1624	1884	2144	CHR09A3RA225--		
1365	1625	1885	2145	1105	1365	1625	1885	2145	CHR09A1RA275--		
1366	1626	1886	2146	1106	1366	1626	1886	2146	CHR09A1RA275--		
1367	1627	1887	2147	1107	1367	1627	1887	2147	CHR09A3RA275--		
1368	1628	1888	2148	1108	1368	1628	1888	2148	CHR09A3RA275--		
1369	1629	1889	2149	1109	1369	1629	1889	2149	CHR09A1RA335--		
1370	1630	1890	2150	1110	1370	1630	1890	2150	CHR09A1RA335--		
1371	1631	1891	2151	1111	1371	1631	1891	2151	CHR09A3RA335--		
1372	1632	1892	2152	1112	1372	1632	1892	2152	CHR09A3RA335--		
1373	1633	1893	2153	1113	1373	1633	1893	2153	CHR09A1RA395--		
1374	1634	1894	2154	1114	1374	1634	1894	2154	CHR09A1RA395--		
1375	1635	1895	2155	1115	1375	1635	1895	2155	CHR09A3RA395--		
1376	1636	1896	2156	1116	1376	1636	1896	2156	CHR09A3RA395--		
1377	1637	1897	2157	1117	1377	1637	1897	2157	CHR09A1RA475--		
1378	1638	1898	2158	1118	1378	1638	1898	2158	CHR09A1RA475--		
1379	1639	1899	2159	1119	1379	1639	1899	2159	CHR09A3RA475--		
1380	1640	1900	2160	1120	1380	1640	1900	2160	CHR09A3RA475--		
1381	1641	1901	2161	1121	1381	1641	1901	2161	CHR09A1RA565--		
1382	1642	1902	2162	1122	1382	1642	1902	2162	CHR09A1RA565--		
1383	1643	1903	2163	1123	1383	1643	1903	2163	CHR09A3RA565--		
1384	1644	1904	2164	1124	1384	1644	1904	2164	CHR09A3RA565--		
1385	1645	1905	2165	1125	1385	1645	1905	2165	CHR09A1RA685--		
1386	1646	1906	2166	1126	1386	1646	1906	2166	CHR09A1RA685--		
1387	1647	1907	2167	1127	1387	1647	1907	2167	CHR09A3RA685--		
1388	1648	1908	2168	1128	1388	1648	1908	2168	CHR09A3RA685--		
1389	1649	1909	2169	1129	1389	1649	1909	2169	CHR09A1RA825--		
1390	1650	1910	2170	1130	1390	1650	1910	2170	CHR09A1RA825--		
1391	1651	1911	2171	1131	1391	1651	1911	2171	CHR09A3RA825--		
1392	1652	1912	2172	1132	1392	1652	1912	2172	CHR09A3RA825--		
1393	1653	1913	2173	1133	1393	1653	1913	2173	CHR09A1RA106--	CHR09A1RA106--	0113
1394	1654	1914	2174	1134	1394	1654	1914	2174	CHR09A1RA106--	CHR09A1RA106--	0114
1395	1655	1915	2175	1135	1395	1655	1915	2175	CHR09A3RA106--	CHR09A3RA106--	0115
1396	1656	1916	2176	1136	1396	1656	1916	2176	CHR09A3RA106--	CHR09A3RA106--	0116
1397	1657	1917	2177	1137	1397	1657	1917	2177	CHR09A1RA126--	CHR09A1RA126--	0117
1398	1658	1918	2178	1138	1398	1658	1918	2178	CHR09A1RA126--	CHR09A1RA126--	0118
1399	1659	1919	2179	1139	1399	1659	1919	2179	CHR09A3RA126--	CHR09A3RA126--	0119
1400	1660	1920	2180	1140	1400	1660	1920	2180	CHR09A3RA126--	CHR09A3RA126--	0120
1401	1661	1921	2186	1141	1401	1661	1921	2181	CHR09A1NC104--		
1402	1662	1922	2182	1142	1402	1662	1922	2182	CHR09A1NC104--		
1403	1663	1923	2183	1143	1403	1663	1923	2183	CHR09A3NC104--		
1404	1664	1924	2184	1144	1404	1664	1924	2184	CHR09A3NC104--		
1405	1665	1925	2185	1145	1405	1665	1925	2185	CHR09A1NC224--		
1406	1666	1926	2186	1146	1406	1666	1926	2186	CHR09A1NC224--		
1407	1667	1927	2187	1147	1407	1667	1927	2187	CHR09A3NC224--		
1408	1668	1928	2188	1148	1408	1668	1928	2188	CHR09A3NC224--		
1409	1669	1929	2189	1149	1409	1669	1929	2189	CHR09A1NC474--		
1410	1670	1930	2190	1150	1410	1670	1930	2190	CHR09A1NC474--		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE IV. Substitutability data - Continued.

Dash number in MIL-C-39022/1D				Dash number in MIL-C-39022/1C					Type designation in MIL-C-39022/1B 1/	Type designation in MIL-C-39022/1A and /1 1/ 2/	Dash number in MIL-C-39022/1A and /1
M(1.0)	P(0.1)	R(0.01)	S(0.001)	L(5.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)			
1411	1671	1931	2191	1151	1411	1671	1931	2191	CHR09A3NC474--		
1412	1672	1932	2192	1152	1412	1672	1932	2192	CHR09A3NC474--		
1413	1673	1933	2193	1153	1413	1673	1933	2193	CHR09A1NC105--		
1414	1674	1934	2194	1154	1414	1674	1934	2194	CHR09A1NC105--		
1415	1675	1935	2195	1155	1415	1675	1935	2195	CHR09A3NC105--		
1416	1676	1936	2196	1156	1416	1676	1936	2196	CHR09A3NC105--		
1417	1677	1937	2197	1157	1417	1677	1937	2197	CHR09A1NC155--		
1418	1678	1938	2198	1158	1418	1678	1938	2198	CHR09A1NC155--		
1419	1679	1939	2199	1159	1419	1679	1939	2199	CHR09A3NC155--		
1420	1680	1940	2200	1160	1420	1680	1940	2200	CHR09A3NC155--		
1421	1681	1941	2201	1161	1421	1681	1941	2201	CHR09A1NC225--		
1422	1682	1942	2202	1162	1422	1682	1942	2202	CHR09A1NC225--		
1423	1683	1943	2203	1163	1423	1683	1943	2203	CHR09A3NC225--		
1424	1684	1944	2204	1164	1424	1684	1944	2204	CHR09A3NC225--		
1425	1685	1945	2205	1165	1425	1685	1945	2205	CHR09A1NC335--		
1426	1686	1946	2206	1166	1426	1686	1946	2206	CHR09A1NC335--		
1427	1687	1947	2207	1167	1427	1687	1947	2207	CHR09A3NC335--		
1428	1688	1948	2208	1168	1428	1688	1948	2208	CHR09A3NC335--		
1429	1689	1949	2209	1169	1429	1689	1949	2209	CHR09A1NC475--		
1430	1690	1950	2210	1170	1430	1690	1950	2210	CHR09A1NC475--		
1431	1691	1951	2211	1171	1431	1691	1951	2211	CHR09A3NC475--		
1432	1692	1952	2212	1172	1432	1692	1952	2212	CHR09A3NC475--		
1433	1693	1953	2213	1173	1433	1693	1953	2213	CHR09A1NC685--		
1434	1694	1954	2214	1174	1434	1694	1954	2214	CHR09A1NC685--		
1435	1695	1955	2215	1175	1435	1695	1955	2215	CHR09A3NC685--		
1436	1696	1956	2216	1176	1436	1696	1956	2216	CHR09A3NC685--		
1437	1697	1957	2217	1177	1437	1697	1957	2217	CHR09A1NC106--		
1438	1698	1958	2218	1178	1438	1698	1958	2218	CHR09A1NC106--		
1439	1699	1959	2219	1179	1439	1699	1959	2219	CHR09A3NC106--		
1440	1700	1960	2220	1180	1440	1700	1960	2220	CHR09A3NC106--		
1441	1701	1961	2221	1181	1441	1701	1961	2221	CHR09A1NC126--		
1442	1702	1962	2222	1182	1442	1702	1962	2222	CHR09A1NC126--		
1443	1703	1963	2223	1183	1443	1703	1963	2223	CHR09A3NC126--		
1444	1704	1964	2224	1184	1444	1704	1964	2224	CHR09A3NC126--		
1445	1705	1965	2225	1185	1445	1705	1965	2225	CHR09A1NE473--		
1446	1706	1966	2226	1186	1446	1706	1966	2226	CHR09A1NE473--		
1447	1707	1967	2227	1187	1447	1707	1967	2227	CHR09A3NE473--		
1448	1708	1968	2228	1188	1448	1708	1968	2228	CHR09A3NE473--		
1449	1709	1969	2229	1189	1449	1709	1969	2229	CHR09A1NE104--		
1450	1710	1970	2230	1190	1450	1710	1970	2230	CHR09A1NE104--		
1451	1711	1971	2231	1191	1451	1711	1971	2231	CHR09A3NE104--		
1452	1712	1972	2232	1192	1452	1712	1972	2232	CHR09A3NE104--		
1453	1713	1973	2233	1193	1453	1713	1973	2233	CHR09A1NE224--		
1454	1714	1974	2234	1194	1454	1714	1974	2234	CHR09A1NE224--		
1455	1715	1975	2235	1195	1455	1715	1975	2235	CHR09A3NE224--		
1456	1716	1976	2236	1196	1456	1716	1976	2236	CHR09A3NE224--		
1457	1717	1977	2237	1197	1457	1717	1977	2237	CHR09A1RA474--		
1458	1718	1978	2238	1198	1458	1718	1978	2238	CHR09A1RA474--		
1459	1719	1979	2239	1199	1459	1719	1979	2239	CHR09A3NE474--		
1460	1720	1980	2240	1200	1460	1720	1980	2240	CHR09A3NE474--		
1461	1721	1981	2241	1201	1461	1721	1981	2241	CHR09A1NE105--		
1462	1722	1982	2242	1202	1462	1722	1982	2242	CHR09A1NE105--		

ee footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T18:13Z
Check the source to verify that this is the current version before use.

(D) TABLE IV. Substitutability data - Continued.

Dash number in MIL-C-39022/1D				Dash number in MIL-C-39022/1C					Type designation in MIL-C-39022/1B 1/	Type designation in MIL-C-39022/1A and /1 1/ 2/	Dash number in MIL-C-39022/1A and /1
M(1.0)	P(0.1)	R(0.01)	S(0.001)	L(5.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)			
1463	1723	1983	2243	1203	1463	1723	1983	2243	CHR09A3NE105--		
1464	1724	1984	2244	1204	1464	1724	1984	2244	CHR09A3NE105--		
1465	1725	1985	2245	1205	1465	1725	1985	2245	CHR09A1NE125--		
1466	1726	1986	2246	1206	1466	1726	1986	2246	CHR09A1NE125--		
1467	1727	1987	2247	1207	1467	1727	1987	2247	CHR09A3NE125--		
1468	1728	1988	2248	1208	1468	1728	1988	2248	CHR09A3NE125--		
1469	1729	1989	2249	1209	1469	1729	1989	2249	CHR09A1NE335--		
1470	1730	1990	2250	1210	1470	1730	1990	2250	CHR09A1NE335--		
1471	1731	1991	2251	1211	1471	1731	1991	2251	CHR09A3NE335--		
1472	1732	1992	2252	1212	1472	1732	1992	2252	CHR09A3NE335--		
1473	1733	1993	2253	1213	1473	1733	1993	2253	CHR09A1NF103--		
1474	1734	1994	2254	1214	1474	1734	1994	2254	CHR09A1NF103--		
1475	1735	1995	2255	1215	1475	1735	1995	2255	CHR09A3NF103--		
1476	1736	1996	2256	1216	1476	1736	1996	2256	CHR09A3NF103--		
1477	1737	1997	2257	1217	1477	1737	1997	2257	CHR09A1NF223--		
1478	1738	1998	2258	1218	1478	1738	1998	2258	CHR09A1NF223--		
1479	1739	1999	2259	1219	1479	1739	1999	2259	CHR09A3NF223--		
1480	1740	2000	2260	1220	1480	1740	2000	2260	CHR09A3NF223--		
1481	1741	2001	2261	1221	1481	1741	2001	2261	CHR09A1NF473--		
1482	1742	2002	2262	1222	1482	1742	2002	2262	CHR09A1NF473--		
1483	1743	2003	2263	1223	1483	1743	2003	2263	CHR09A3NF473--		
1484	1744	2004	2264	1224	1484	1744	2004	2264	CHR09A3NF473--		
1485	1745	2005	2265	1225	1485	1745	2005	2265	CHR09A1NF104--		
1486	1746	2006	2266	1226	1486	1746	2006	2266	CHR09A1NF104--		
1487	1747	2007	2267	1227	1487	1747	2007	2267	CHR09A3NF104--		
1488	1748	2008	2268	1228	1488	1748	2008	2268	CHR09A3NF104--		
1509	1769	2029	2289	1249	1509	1769	2029	2289			
1510	1770	2030	2290	1250	1510	1770	2030	2290			
1511	1771	2031	2291	1251	1511	1771	2031	2291			
1512	1772	2032	2292	1252	1512	1772	2032	2292			
1489	1749	2009	2269	1229	1489	1749	2009	2269	CHR09A1NF224--		
1490	1750	2010	2270	1231	1490	1750	2010	2270	CHR09A1NF224--		
1491	1751	2011	2271	1230	1491	1751	2011	2271	CHR09A3NF224--		
1492	1752	2012	2272	1232	1492	1752	2012	2272	CHR09A3NF224--		
1493	1753	2013	2273	1233	1493	1753	2013	2273	CHR09A1NF474--		
1494	1754	2014	2274	1234	1494	1754	2014	2274	CHR09A1NF474--		
1495	1755	2015	2275	1235	1495	1755	2015	2275	CHR09A3NF474--		
1496	1756	2016	2276	1236	1496	1756	2016	2276	CHR09A3NF474--		
1497	1757	2017	2277	1237	1497	1757	2017	2277	CHR09A1NF105--		
1498	1758	2018	2278	1238	1498	1758	2018	2278	CHR09A1NF105--		
1499	1759	2019	2279	1239	1499	1759	2019	2279	CHR09A3NF105--		
1500	1760	2020	2280	1240	1500	1760	2020	2280	CHR09A3NF105--		
1501	1761	2021	2281	1241	1501	1761	2021	2281	CHR09A1NF155--		
1502	1762	2022	2282	1242	1502	1762	2022	2282	CHR09A1NF155--		
1503	1763	2023	2283	1243	1503	1763	2023	2283	CHR09A3NF155--		
1504	1764	2024	2284	1244	1504	1764	2024	2284	CHR09A3NF155--		
1505	1765	2025	2285	1245	1505	1765	2025	2285	CHR09A1NF225--		
1506	1766	2026	2286	1246	1506	1766	2026	2286	CHR09A1NF225--		
1507	1767	2027	2287	1247	1507	1767	2027	2287	CHR09A3NF225--		
1508	1768	2028	2288	1248	1508	1768	2028	2288	CHR09A3NF225--		

1/ Complete type designation will include additional symbols for capacitance tolerance and failure rate level.
2/ The following type designations are only listed in MIL-C-39022/1 and /1A: CHR09A1RA205--, CHR09A3RA205--, CHR09A1RA255--, CHR09A3RA255--, CHR09A1RA305--, CHR09A3RA305--, CHR09A1RA405--, CHR09A3RA405--, CHR09A1RA505--, CHR09A3RA505--, CHR09A1RA605--, CHR09A3RA605--, CHR09A1RA705--, and CHR09A3RA705--.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T18:13Z
Check the source to verify that this is the current version before use.

IR:

Insulating sleeves: 100 megohms, minimum.

Terminal to terminal: Not less than 33.3 percent of initial requirement.

Terminals to case (when case is not a terminal): 5,000 megohms, minimum.

Cap.: Within ±10 percent of initial value.

DF (at +25°C ±3°C after life: 1.25 percent.

Quality conformance: 240 hours at accelerated conditions and meet the requirements for qualification test.

Extended life:

Accelerated conditions: 2,000 +72, -0 hours.

Rated conditions: 10,000 +96, -0 hours.

Substitutability: See table IV.

Marking: In accordance with MIL-C-39022.

Part or Identifying Number (PIN): M39022/01- (dash number from table I).

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Air Force - 17, 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1832-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:13Z
Check the source to verify that this is the current version before use.