NOT MEASUREMENT SENSITIVE

MIL-DTL-41819/40B
30 September 1996
SUPERSEDING
MIL-R-41819/40A
1 November 1994

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, LETTER "M"

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-41819 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

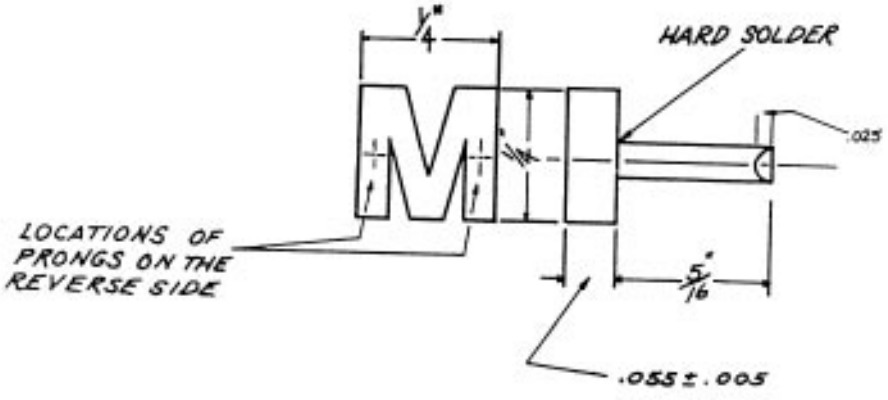

MATERIAL: Red Brass or Gilding Metal

FINISH: Copper Flash (Red Brass only), Matte Finish
DIMENSIONS:
HEIGHT (Overall): 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm)
WIDTH (Overall): 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm)
THICKNESS (Thickest point): 0.055 inch ± 0.005 inch (0.119 cm ± 0.012 cm)

NOTES:
1. Ribbon attachment "M" shall be die cut.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:59Z
Check the source to verify that this is the current version before use.

2. The attaching device shall be two single post type prongs or staple type prong. When two single posts are used, they shall be centered and hard soldered on the horizontal center line. When staple type prongs are used, they shall be centered on the horizontal center line.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0863)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:59Z
Check the source to verify that this is the current version before use.