INCH-POUND

MIL-DTL-41819/47A
8 April 2005
SUPERSEDING
MIL-DTL-41819/47
4 October 2002

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, ARCTIC "A," AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-41819.

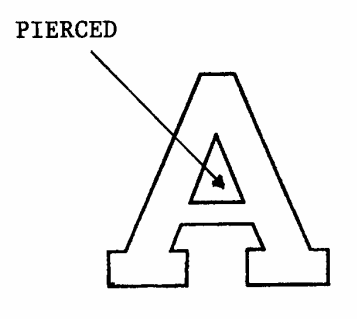

MATERIAL: 85/15 Rich-Low Brass

FINISH: Oxidized, Relieved, Matte Finished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 4.

DIMENSIONS:

HEIGHT: 1/4 ± 1/64 inch
WIDTH: 1/4 ± 1/64 inch
THICKNESS (at thickest point): 0.040 ± 0.005 inch

NOTES:

1. Ribbon attachment shall be die cut.

2. Piercing shall be as indicated.

3. Attaching device shall be a staple type prong. The prong shall be centered on the reverse side of the ribbon attachment in the center of the bar on the "A".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:01Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0176/001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:01Z
Check the source to verify that this is the current version before use.