NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/81
27 June 1996
SUPERSEDING
MIL-I-3575/18H
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, GENERAL STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

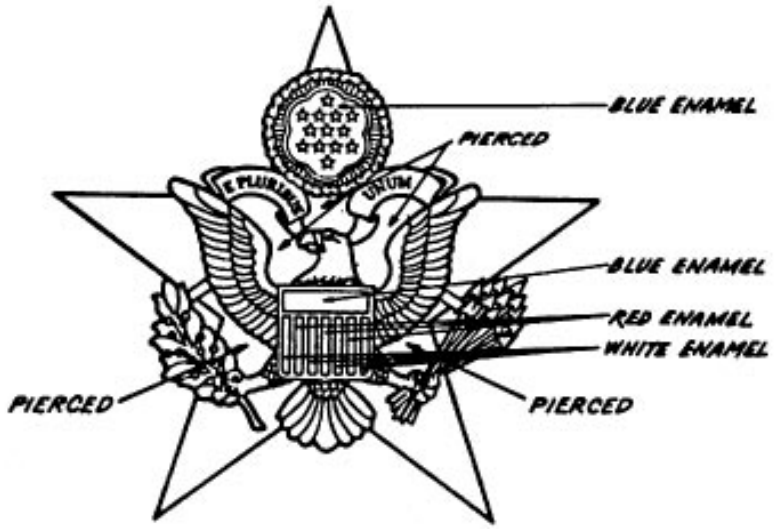

MATERIAL:
-1: STAR: Red Brass
DEVICE (Coat of Arms): Gilding Metal
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: STAR: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:56Z
Check the source to verify that this is the current version before use.

DEVICE (Coat of Arms): Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

2: Dull Flat Black Enamel.

DIMENSIONS:

STAR:

CIRCUMSCRIBED DIAMETER: 1 inch (2.54 cm) (REF)

THICKNESS (Thickest Point): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

DEVICE:

HEIGHT: 5/8 inch (1.59 cm) (REF)

WIDTH: 5/8 inch (1.59 cm) (REF)

THICKNESS (Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

ASSEMBLED THICKNESS (Thickest Point): 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Enameled colors for Dash No. 1 shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	20
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. The device shall be superimposed and secured to the star by two rivets or soft solder. When rivets are used, they shall be solid and be fabricated from any type brass. The rivets shall be located on the insignia as indicated.

6. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line of the star, equidistant from each end and 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) apart.

7. The dull flat black enamel for Dash No. -2 shall match FED-STD-595 Chip No. 37038.

8. Star may be rhodium plated, mirror-like polished at the option of the manufacturer.

9. Insignia for Dash No.-1 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

STAR: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DEVICE (Coat of Arms): Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:56Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:56Z
Check the source to verify that this is the current version before use.