NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/81C(IH)
19 March 2026
SUPERSEDING
MIL-DTL-15665/81B(IH)
25 January 2021

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, GENERAL STAFF, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

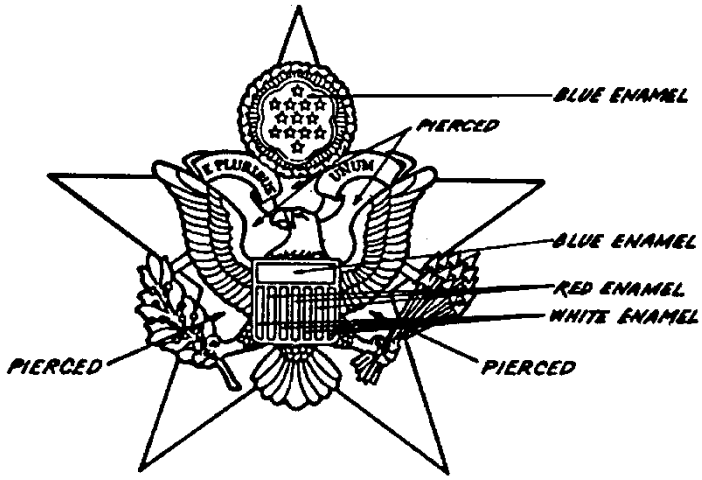

DASH NO.
-1: Regular
-2: Subdued

MATERIAL:
-1: STAR: Red Brass 85/15 (UNS Alloy No. C- 230)
DEVICE (Coat of arms): Red Brass 85/15 (UNS Alloy No. C-230)

-2: Red Brass 85/15 (UNS Alloy No. C- 230) or Zinc Aluminum

FINISH:
-1: STAR: Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
DEVICE: (Coat of arms): Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:56Z
Check the source to verify that this is the current version before use.

-2: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:
STAR:
CIRCUMSCRIBED DIAMETER: 1 inch (REF)
THICKNESS (Thickest point): 0.050 inch ± 0.005 inch
DEVICE:
HEIGHT (Overall): 5/8 inch (REF)
WIDTH (Overall): 5/8 inch (REF)
THICKNESS (At thickest point): 0.060 inch ± 0.005 inch
ASSEMBLED THICKNESS (Thickest point): 0.110inch ± 0.010 inch

ATTACHING DEVICE:
1: Attaching device shall be prong and wing clutch type.

2: Prongs shall be located on the horizontal center line, equidistant from each end and 1/2 inch ± 1/64 inch apart.

3: The device shall be superimposed and secured to the star by two rivets or soft solder. When rivets are used, they shall be solid and be fabricated from any type of brass. The rivets shall be located on the insignia as indicated.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#20
White	#28

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The device shall be superimposed and secured to the star by two rivets or soft solder. When rivets are used, they shall be solid and be fabricated from any type brass. The rivets shall be located on the insignia as indicated.

4. Star may be rhodium plated, mirror-like polished at the option of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:56Z
Check the source to verify that this is the current version before use.

5. Insignia for -1 may be manufactured using 22 karat gold plate with nickel under plating as follows for commercial sale only:

STAR: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DEVICE (Coat of Arms): Epoxy resin (Stoning epoxy), 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 11.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-200)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:56Z
Check the source to verify that this is the current version before use.