NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/85
27 June 1996
SUPERSEDING
MIL-I-3575/39E
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, MEDICAL SERVICE, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

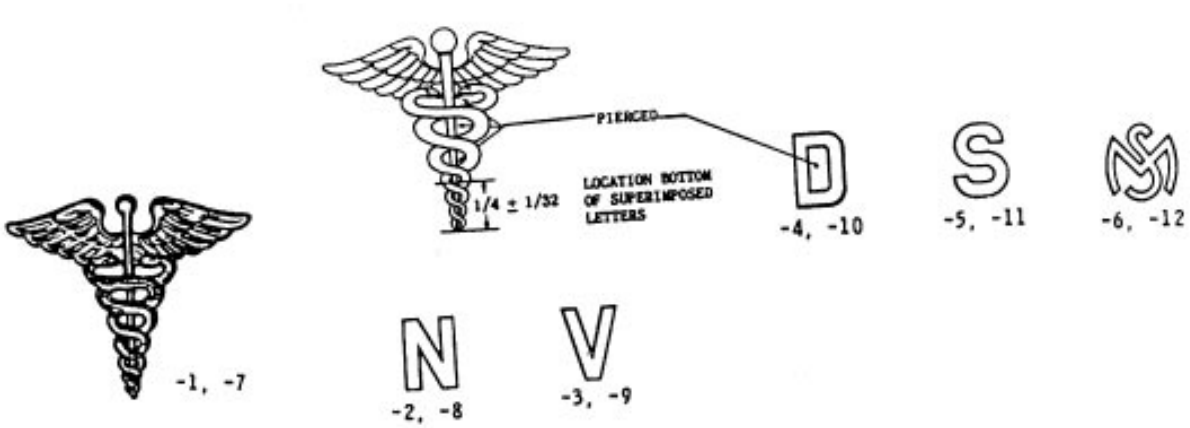

DASH NO.
-1: Medical Corps
-2: Army Nurse Corps
-3: Veterinary Corps
-4: Dental Corps
-5: Army Medical Specialist Corps
-6: Army Medical Service Corps
-7: Medical Corps, Subdued
-8: Army Nurse Corps, Subdued
-9: Veterinary Corps, Subdued
-10: Dental Corps, Subdued
-11: Army Medical Specialist Corps, Subdued
-12: Army Medical Service Corps, Subdued

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:58Z
Check the source to verify that this is the current version before use.

MATERIAL:

-1:	Red Brass
-2, -3, -4, -5, -6:	Gilding Metal
-7, -8, -9, -10, -11, -12:	Red Brass or Zinc Aluminum

DIMENSIONS:

CADUCEUS:

HEIGHT (Overall): 1 inch (2.54 cm) (REF)

WIDTH (Overall): 1-3/16 inches (3.02 cm) (REF)

THICKNESS (At Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± cm)

LETTERS:

HEIGHT (Overall):

-2, -3, -4, -5, -8, -9, -10, -11: 3/8 inch (0.95 cm) (REF)

-6, -12: 13/32 inch (1.03 cm) (REF)

THICKNESS (At Thickest Point): 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

FINISH:

-1, -2, -3, -4, -5:	CADUCEUS: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
	LETTERS: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-6:	CADUCEUS: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14. Reverse and Edges Clean.
	LETTERS: Hard Enameled, Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
-6, -7, -8, -9, -10, -11, -12:	Dull Flat Black Enamel.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. The design of all insignia are the same as Dash No. -1 except for the superimposed letters.

3. Pierced areas shall be as indicated.

4. Enameled colors for Dash No. -2 through -6 shall be black and shall conform to the TIOH color chip number 26 or the standard sample.

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. Superimposed letters shall be soft soldered to the caduceus.

7. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line of the caduceus, equidistant from each end and 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) apart.

8. The dull flat black enamel for Dash No. -7 through -12 shall match FED-STD-595 Chip No. 37038.

9. Insignia for Dash No. -1 through -5 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:58Z
Check the source to verify that this is the current version before use.

CADUCEUS: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.
LETTERS: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:58Z
Check the source to verify that this is the current version before use.