NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/85B
25 January 2021
SUPERSEDING
MIL-DTL-15665/85A
15 March 2016

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, MEDICAL SERVICE, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

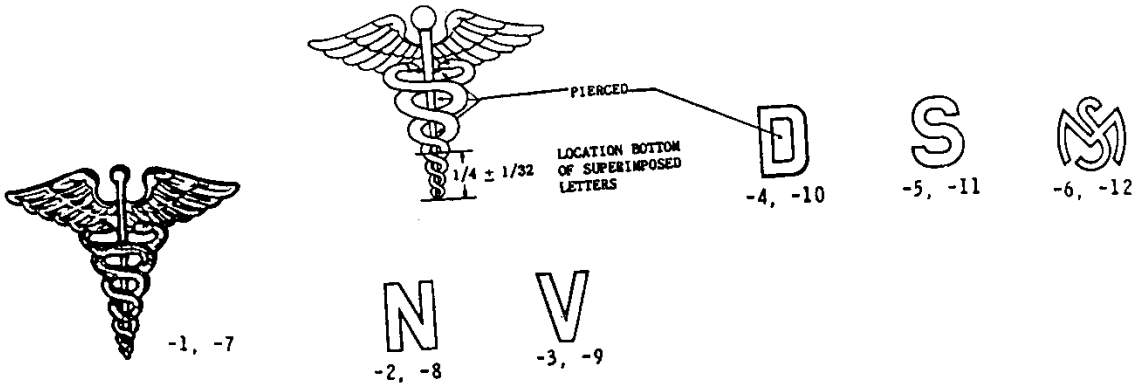

DASH NO.
-1: Medical Corps
-2: Army Nurse Corps
-3: Veterinary Corps
-4: Dental Corps
-5: Army Medical Specialist Corps
-6: Army Medical Service Corps
-7: Medical Corps, Subdued
-8: Army Nurse Corps, Subdued
-9: Veterinary Corps, Subdued
-10: Dental Corps, Subdued
-11: Army Medical Specialist Corps, Subdued
-12: Army Medical Service Corps, Subdued

MATERIAL:
-1: Red Brass 85/15 (UNS Alloy No. C- 230)

-2,-3, -4, -5, -6: Gilding Metal 95/5 (UNS Alloy No. C- 210)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:58Z
Check the source to verify that this is the current version before use.

-7, -8, -9, -10, -11, -12: Red Brass 85/15 (UNS Alloy No. C-230) or Zinc Aluminum

FINISH:

-1: -1, -2, -3, -4, -5: CADUCEUS: 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

LETTERS: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-6: CADUCEUS: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14. Reverse and Edges Clean.

LETTERS: Epoxy resin, Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

-6, -7, -8, -9, -10, -11, -12: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:

CADUCEUS:

HIEGHT (Overall): 1 inch (REF)

WIDTH (Overall): 1-3/16 inches (REF)

THICKNESS (At thickest point): 0.080 ± 0.010 inch

LETTERS:

HEIGHT (Overall):

-1, -2, -3, -4, -5, -8, -9, -10, -11: 3/8 inch (REF)

-6, -12: 13/32 inch (REF)

Thickness (At thickest point): 0.040 ± 0.010 inch

ATTACHING DEVICE:

1. Attaching device shall be prong and wing type clutch.

2. Prongs shall be located on the vertical center line of the caduceus, equidistant from each end and 1/2 inch $\pm$ 1/64 inch apart.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The design of all insignia are the same as -1 except for the superimposed letters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:58Z
Check the source to verify that this is the current version before use.

4. Superimposed letters shall be soft soldered to the caduceus.

5. Insignia for -1 through -5 may be manufactured using 22K gold plate with nickel under plating as follows for commercial sale only:

CADUCEUS: 22K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.

LETTERS: Epoxy resin, 22K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-175)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:58Z
Check the source to verify that this is the current version before use.