NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/89
27 June 1996
SUPERSEDING
MIL-I-3575/22D
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, QUARTERMASTER CORPS, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

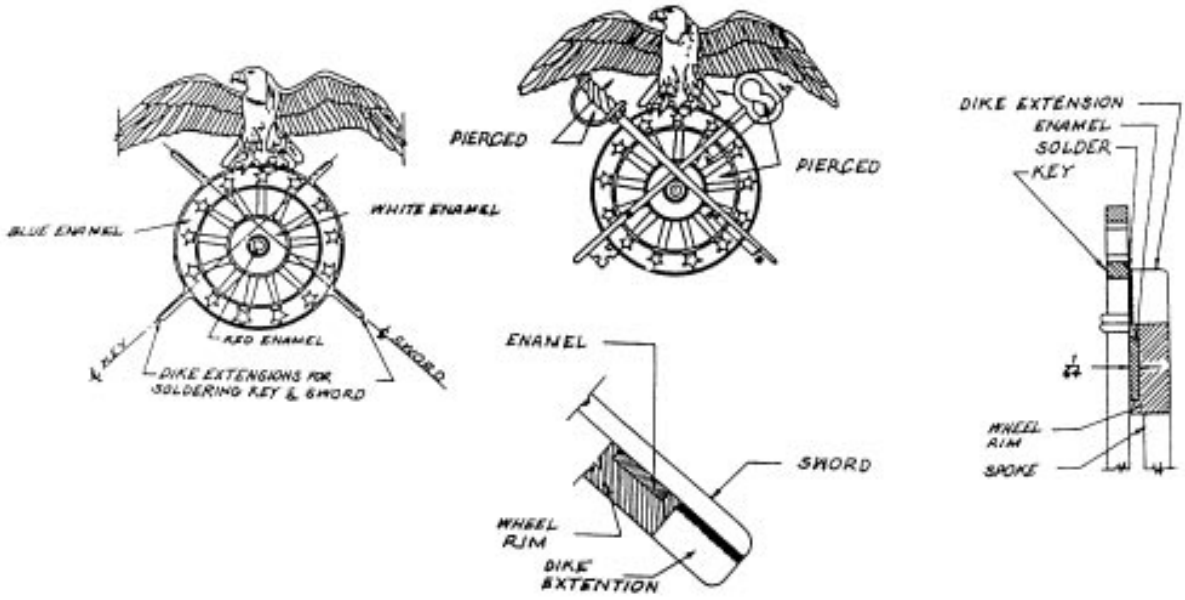

MATERIAL:
-1: Gilding Metal
-2: Red Brass or Zinc Aluminum

DASH NO:
-1: Regular
-2: Subdued

FINISH:
-1: WHEEL: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
EAGLE: Gold Plated, Matte Finish with Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
KEY AND SWORD: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
2: Dull Flat Black Enamel.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:59Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
HEIGHT (Overall): 3/4 inch (1.91 cm) (REF)
WIDTH (At Wings): 15/16 inch (2.38 cm) (REF)
THICKNESS (At Thickest Point):
WHEEL AND EAGLE: 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)
THICKNESS (At Thickest Point): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall): 17/32 inch (1.35 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (At Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)
ASSEMBLED THICKNESS (Thickest Point): 0.127 inch ± 0.010 inch (0.323 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Enameled colors for Dash No. -1 shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	20
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. Key and sword shall be soft soldered to the wheel at each dike extension.

6. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

7. The dull flat black enamel for Dash No. -2 shall match FED-STD-595 Chip No. 37038.

8. Insignia for Dash No. -1 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

WHEEL: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 11.
EAGLE: Gold Plated, Matte Finish with Polished Highlights and shall match TIOH Metal Finish Chip Number 11.
KEY AND SWORD: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:59Z
Check the source to verify that this is the current version before use.

Review activities:
  DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:59Z
Check the source to verify that this is the current version before use.