INCH-POUND

A-A-55276

May 5, 1995

COMMERCIAL ITEM DESCRIPTION

SWEATPANT, PHYSICAL CONDITIONING UNIFORM

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description covers the requirements for a sweatpant used by Air Force personnel as a component of the Physical Conditioning Uniform.

2. CLASSIFICATION. The sweatpant shall be of one type and class.

3. SALIENT CHARACTERISTICS.

3.1 Description. The fleece sweatpant (see Figure I) shall have a 1-1/4 ± 1/4 inch wide covered elastic waistband with concealed drawcord, inseam pockets positioned 1-1/2 to 2 inches below bottom of waistband. The pocket opening shall be 5-1/2 ± 1/4 inches with a depth of 7 ± 1/4 inches. The sweatpants shall have 1/4 inch wide covered elastic at the cuff of each leg opening. The sweatpant shall have the AIR FORCE logo (see Figure II) screen printed on the side of the left front leg centered and positioned as outlined in Table I. The screen print shall match Navy Blue shade 35048 of FED-STD-595.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSC, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE I. Screen Print Location.
(Below bottom of waistband, inches)

SIZE	XSMALL	SMALL	MEDIUM	LARGE	XLARGE	Tolerance
Placement of LOGO	3	3-1/2	4	4-1/2	5	±1/4

3.2 Materials.

3.2.1 Basic Material The sweatpant shall be fabricated from fleece fabric having 55 ± 5 percent cotton with the remaining percentage polyester. The fleece fabric shall weigh 9.0 ± 0.5 ounces per square yard, have a minimum of 20 wales per inch and a minimum of 27 courses per inch when treated in accordance with ASTM D-3887. The material shall have a minimum bursting strength of 75 pounds when tested in accordance with ASTM D-3787 and shall not shrink or elongate more than 10 percent when tested in accordance with AATCC Method 150 using normal machine cycle. The material shall match the standard sample for shade Lt. Heather Grey 466.(see 7.4).

3.2.1 Matching. The color of the finished cloth shall match the Standard sample when viewed under filtered tungsten lamps that approximate artificial daylight and having a correlated color temperature of 7500 ±200K, with illumination of 100 ±20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300 ±200K.

3.2.2 Pocketing Material. The material for the pockets may be fleece or jersey material. When fleece is used it shall match the basic material. The jersey material shall have 55 ± 5 percent cotton and the remaining percentage polyester. The material shall weigh 5.5 ± 0.5 ounces per square yard, have a minimum of 30 wales per inch and have a minimum of 45 courses per inch when tested in accordance with ASTM D-3887. The jersey material shall have a minimum bursting strength of 75 pounds when tested in accordance with ASTM D3787 and shall not shrink or elongate more than 10 percent when tested in accordance with AATCC Method 150 using normal washing cycle. The jersey material shall match shade Lt. Heather 466 of FED-STD-595.

3.3 Label. Commercial type label is acceptable except that it shall also have a label with the contract number and NSN. The commercial label shall provide the size, care instructions, and fiber content information.

3.3.1 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.4 Sizes and measurements. The sweatpant shall be provided in the following sizes and shall conform to the measurements in TABLE II.:

TABLE II. Finished Measurements.
(inches)

SIZE		XSMALL	SMALL	MEDIUM	LARGE	XLARGE	TOLERANCE
WAIST (RELAXED)	A	10	12	14	16	18	±3/4
WAIST (EXTENDED)	A	17	19	21	23	25	Minimum
LENGTH	B	38-3/4	40-3/4	42-3/4	44-3/4	46-3/4	±1
FRONT RISE	C	13-1/2	14	14-1/2	15	15-1/2	±1/2
BACK RISE	C	13-1/2	14	14-1/2	15	15-1/2	±1/2
INSEAM	D	27	28-1/2	30	31-1/2	33	±1
LEG OPENING	E	3-1/2	4	4-1/2	5	5-1/2	±1/2

A. Waist (Relaxed) : Measure across waistband from folded edge to folded edge along top edge of waistband.
Waist (Extended): Measure across waistband from folded edge to folded edge along top edge of waistband with waistband stretched taunt.
B. Length: Measure from top of waistband to bottom hem of leg.
C. Front Rise: Measure from top of waistband along front rise to the intersection of inseam.
Back Rise: Measure from top of waistband along back rise to the intersection of inseam.
D. Inseam: Measure from intersection of inseam along inseam to bottom hem of leg.
E. Leg Opening: Measure across leg opening from folded edge to folded edge.

Note: The above sizes may be abbreviated as XS, S, M, L, and XL.

3.5 Patterns. Commercial patterns shall be used. They shall conform to the design and requirements cited in this commercial item description.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

4.1 Flammability requirement. The basic material shall conform to the rules and regulations of the Flammable Fabrics Act without the application of a flame retardant finish to the material or to the end item.

5. QUALITY ASSURANCE PROVISIONS

5.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description; conforms to the producer's own drawings, specifications, standards, and quality assurance practices; and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Visual examination. The sweatpants shall be examined for the defects listed in paragraph 5. 3.

5.3 Defects. Any hole, cut, tear; color not as specified; thread ends not removed or not trimmed; any component missing or not as specified; seam twisted, puckered, open; needle chew or tight tension; label incorrect or illegible; logo incorrect, illegible or misplaced; measurement of sweatpants not as specified.

5.4 Market acceptability. The item offered, or a generic equivalent, must have been sold to the commercial market or to the Government for at least 2 years.

5.5 Warranty. The item offered shall include the standard warranty given to the commercial market beginning with the date of delivery of the individual items.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

7.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

7.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

7.4 Sample. For access to standard sample for shade address the contracting activity issuing the invitation for bid.

MILITARY INTERESTS:

Custodians
Air Force - 45

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project 8415-0044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

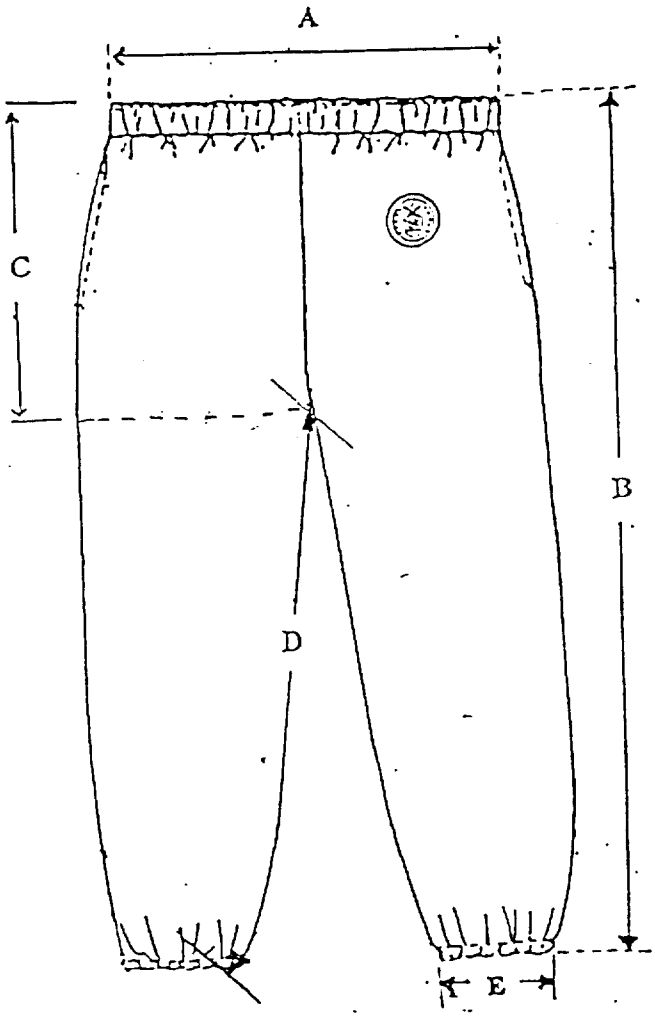


FIGURE . I SWEATPANTS, PHYSICAL CONDITIONING UNIFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.



FIGURE II. AIR FORCE LOGO

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.