INCH POUND

A-A-55276A
December 16,1999
SUPERSEDING
A-A-55276
May 05, 1995

COMMERICAL ITEM DESCRIPTIONS

SWEATPANTS

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This document covers the requirements for a sweatpant used by Air Force personnel as a component of the Physical Conditioning Uniform and by Army personnel as a component of the Physical Conditioning Uniform.

2. CLASSIFICATION. The sweatpants shall be in the following classes and sizes:

Class 1 - Air Force; Physical Conditioning Uniform
Class 2 - Army; Physical Conditioning Uniform

Sizes

X-Small Small Medium Large X-Large XX-Large XXX-Large

Beneficial comments(recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textile Directorate, Attn.: DSCP-CRFD, 700 Robbins Ave., Philadelphia, Pa. 19111-5092.

AMSC N/A FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Description. The fleece sweatpants (see Figures 1, Air Force and Figure 4, Army) shall have a 1-1/4 inch wide covered elastic waistband with 4 rows of stitching and a concealed drawcord and a straight cut bar type buttonhole with ends securely tacked on inside of center front of the waistband. The sweatpants shall have two side pockets, opening shall be 6 (+/- 1/4) inches with a depth of 7 (+/- 1/4) inches. The top and bottom of pocket opening shall be securely tacked. The sweatpants shall have 1/4 inch wide covered elastic at the cuff of each leg opening. The ARMY sweatpants shall have lettering "ARMY" (see Figure 3) screen-printed down left leg. The lettering for Class 2 sweatpants shall be Black and beginning 12-1/2 inches below top of waistband centered between seams (see Figure 3). The AIR FORCE sweatpants shall have the logo (see Figure 2) printed on the left front centered and positioned as outlined in Table 1. The screen print shall match Navy blue shade 35048 of FED- STD-595, for the Class 1.

Table 1 Screen Print Location For Air Force
(below bottom of waistband, inches)

Size	x-Small	Small	Medium	Large	X-large	XX-Large	XXX-Large	Tolerance
Placement of logo	3	3-1/2	4	4-1/2	5	5-1/2	6	+/- 1/2

3.2 Basic materials. The sweatpant shall be fabricated from Jersey Knit type fleece fabric having 55 (+/- 5) percent cotton with the remaining percentage polyester. The fleece fabric shall weigh 9.0 (+/- 0.5) ounces per square yard when tested in accordance with ASTM-D-3376, and have a minimum of 20 wales per inch and a minimum of 27 courses per inch when tested in accordance with ASTM-D-3887. The material shall have a minimum bursting strength of 75 pounds when tested in accordance with ASTM-D-3787 and shall not shrink or elongate more than 10 percent when tested in accordance with AATCC Method 150 using normal machine cycle. The material shall match the standard sample for shade (see 7.3).

3.2.1 Matching. The color of the finished cloth shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight and having a correlated color temperature of 7500 (+/- 200K), with illumination of 100 (+/- 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300 (+/- 200K).

3.2.2 Pocketing material. The material for the pocketing may be fleece or Jersey material. When fleece is used it shall match the basic material. The Jersey material shall have 55 (+/- 5) percent cotton and the remaining percentage polyester. The material shall weigh 5.5 (+/- 0.5) ounces per square yard, have a minimum of 30 wales per inch and have a minimum of 45 courses per inch when tested in accordance with ASTM–D-3887. The Jersey material shall have a minimum bursting strength of 75 pounds when tested in accordance with ASTM-D-3787 and shall not shrink or elongate more than 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

percent when tested in accordance with AATCC Method 150 using normal washing cycle. The material shall closely match the basic material.

3.3 Thread. The thread for seaming and stitching shall be 2-ply cotton covered polyester or spun polyester. The color shall be light gray, or a good match to the basic material and show good colorfastness to laundering. The thread shall have a breaking strength of 1.8 lbs minimum and shall be tested in accordance with ASTM-D-2256.

3.4 Drawcord, The drawcord shall be 3/16 inch diameter 100 percent filament nylon. The nylon shall be bright, regular or high tenacity polyamide having a 840 normal denier and having a minimum breaking strength of 150 pounds. The drawcord shall be basket weave with no core. The drawcord color shall approximate the basic material and shall show "good" colorfastness to home laundering.

3.5 Labels. A commercial-type label is acceptable, provided that an additional printed cloth label containing the contractor's name, contract number, size and National Stock Number (NSN) is caught on the stitching of the commercial label. The commercial label shall include fiber and laundering information. The labels shall be placed in the back seam caught in stitching approximately 2 1/2 inches down from bottom of waistband.

3.5.1 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit National Stock Number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.5.2 Marking. The ink for screening printing "ARMY" to the sweatpant shall be black thermal plastic base ink (withstanding temperatures to 300° F) or equal. The black "ARMY" markings shall be screen printed on the left leg of sweatpant as shown in Figure 2. Letters shall measure 5/8 (+/- 1/16) inch wide and 3 (+/- 1/16) inches in height (see Figure 2). The printing shall have a rating of "4" after 15 launderings when tested as specified in AATCC-61.

3.6 Sizes and measurements. The sweatpant shall be in the following sizes and shall confirm the measurements in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE II. Finished Measurements (inches)

SIZES	X-SM	SMALL	MED	LARGE	X-LARGE	XX-L	XXX-L	Tolerance
!/2 Waist relaxed (A)	11	12	13	14	15	16	17	+/- 1/2
1/2 Waist stretch (B)	17	18	19	21	22	23	24	+/- 1/2
Seat (C) Width	19	20	21	22-1/2	23-1/2	24-1/2	25-1/2	+/- 1/2
Thigh (D) Width	11-1/4	12	12-3/4	13-1/2	14-1/2	15-1/2	16-1/2	+/- 1/2
Cuff (E) Width	4-1/2	5	5	5-1/2	5-1/2	6	6-1/2	+/- 1/2
Inseam (F)	27	28-1/2	30	31-1/2	33	34	35	+/- 1/2
Rise (G)	12-1/2	13-1/2	14-1/2	15-1/2	16	16-1/2	17-1/2	+/- 1/2

A. 1/2 Waist relaxed: Measure across top of waistband lay flat and relaxed.

B. 1/2 Waist stretched: Measure waist stretched without distorting material or breaking stitches.

C. Seat width: Measure straight across, side to side, (at indicated point) above crotch area.

D. Thigh width: Measure straight across leg at crotch point.

E. Cuff width: Measure straight across at bottom of cuff, laying flat.

F. Inseam length: Measure from crotch seam in a straight line to bottom of leg.

G. Rise: Measure from lowest point in crotch seam to top of waistband, along seam, pants laying flat.

4. REGULATORY REQUIREMENTS

4.1 Flammability requirements. The basic material shall conform to the rules and regulations of the Flammable Fabrics Act without the application of a flame retardant finish to the material or to the end item.

4.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, and shall conform to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance.

5.2 Visual examination. Each sweatpant shall be examined for the defects listed below.

5.2.1 Defects. Any hole, cut, or tear; color not as specified; needle chew, mend, or thin area; slubby yarn any loose knitting causing sleaziness, pulled or snagged stitches, any part shaded; any spot or stain (outside); raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; any material defects, waist and angle not smooth, has pleats, twisted, or stretched, drawcord not securely tacked, distorted parts or poor workmanship; any component part omitted; any component not as specified, logo or lettering incorrect, not positioned correctly, printing smeared, label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or purchase order.

7 NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

AATCC Test Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

ANSI/ASQC ZI.4-Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to American National Standards Institute, 11 42nd Street, New York, NY 10036)

7.3 Sample. For access to standard sample for shade address the contracting activity issuing the invitation for bid.

MILITARY INTERESTS:
Custodians:
Air Force – 45
Army - GL

Civil Agency Coordinating Activity
GSA – FSS

Preparing Activity:
DLA – CT

(Project 8415-0177)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

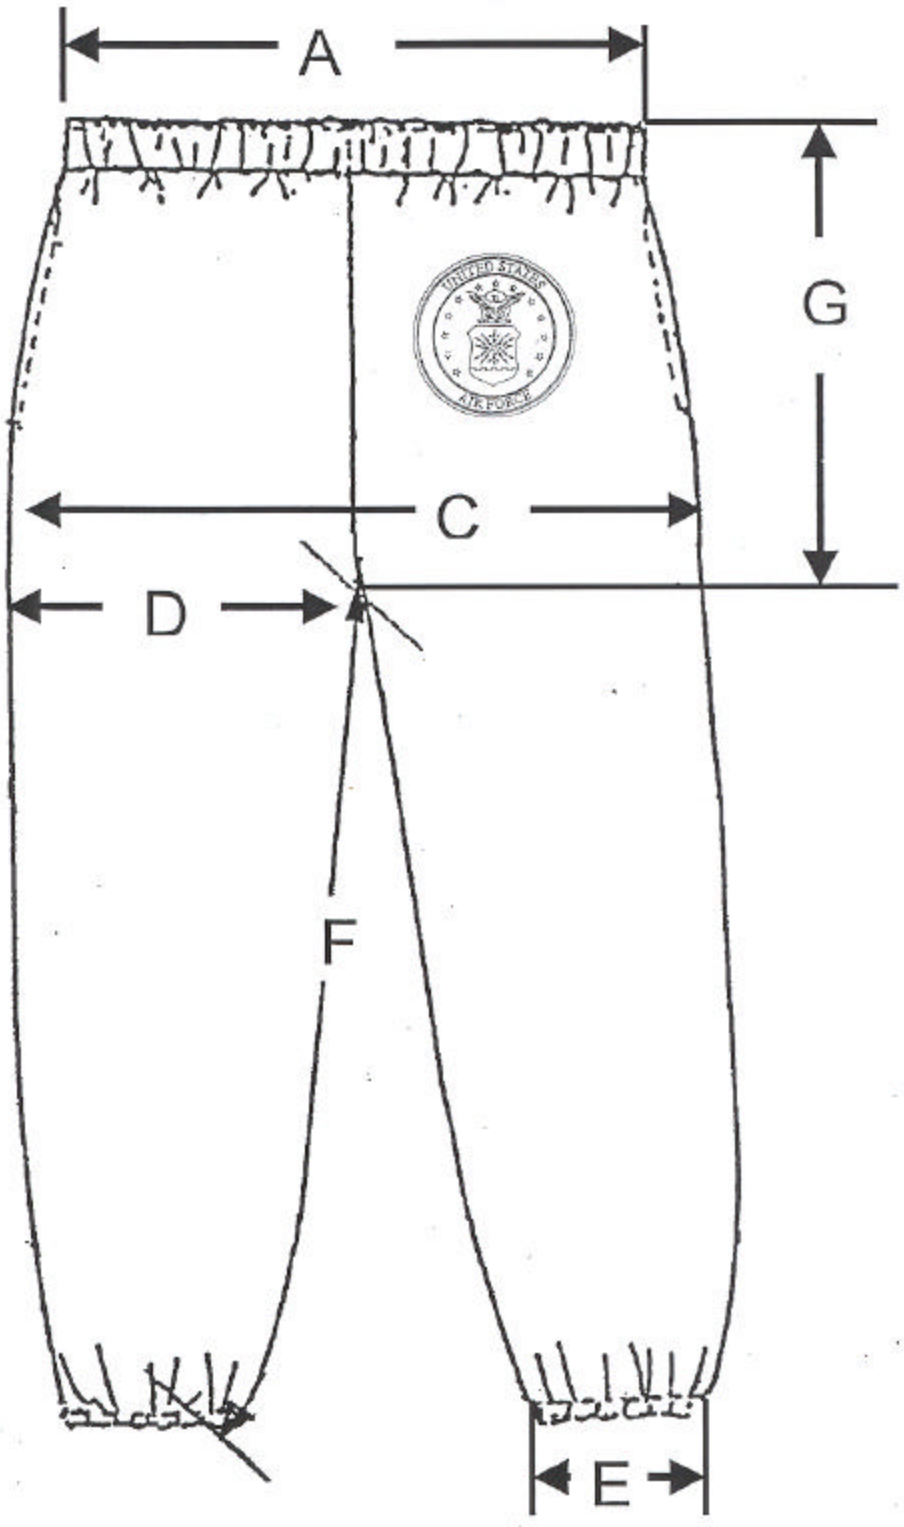


FIGURE 1 AIR FORCE SWEATPANT, PHYSICAL CONDITIONING UNIFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.



FIGURE 2 AIR FORCE LOGO
The diameter shall be 2-3/4 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

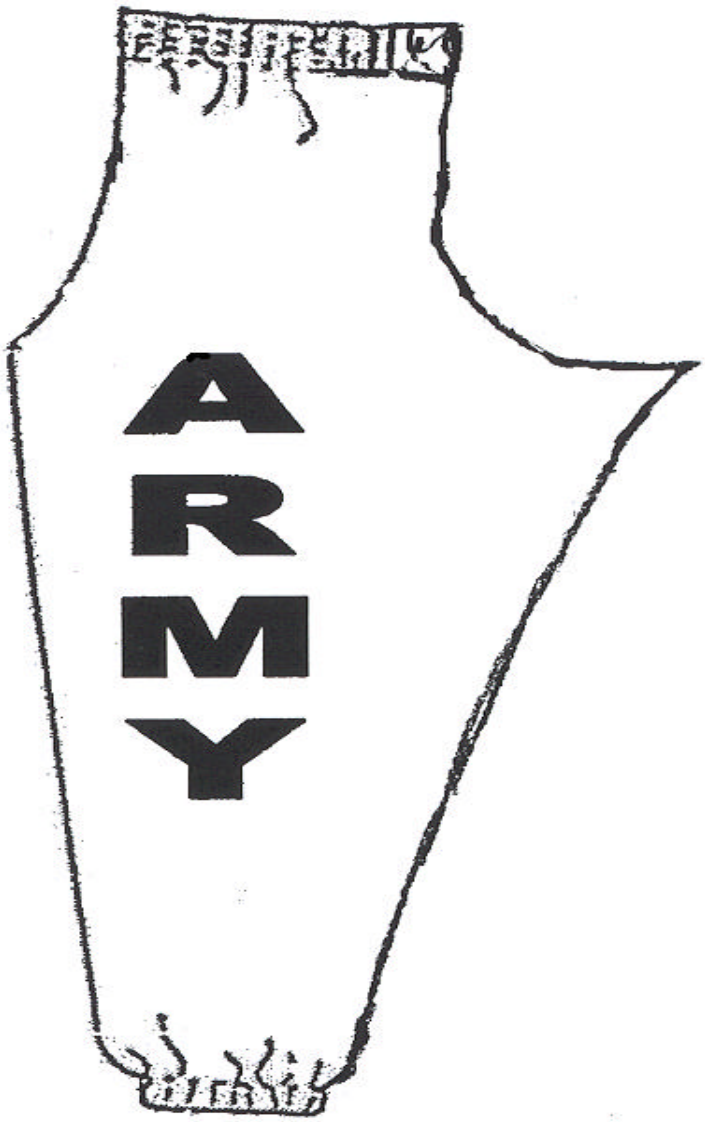


FIGURE 3 SWEATPANT, PHYSICAL CONDITIONING UNIFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

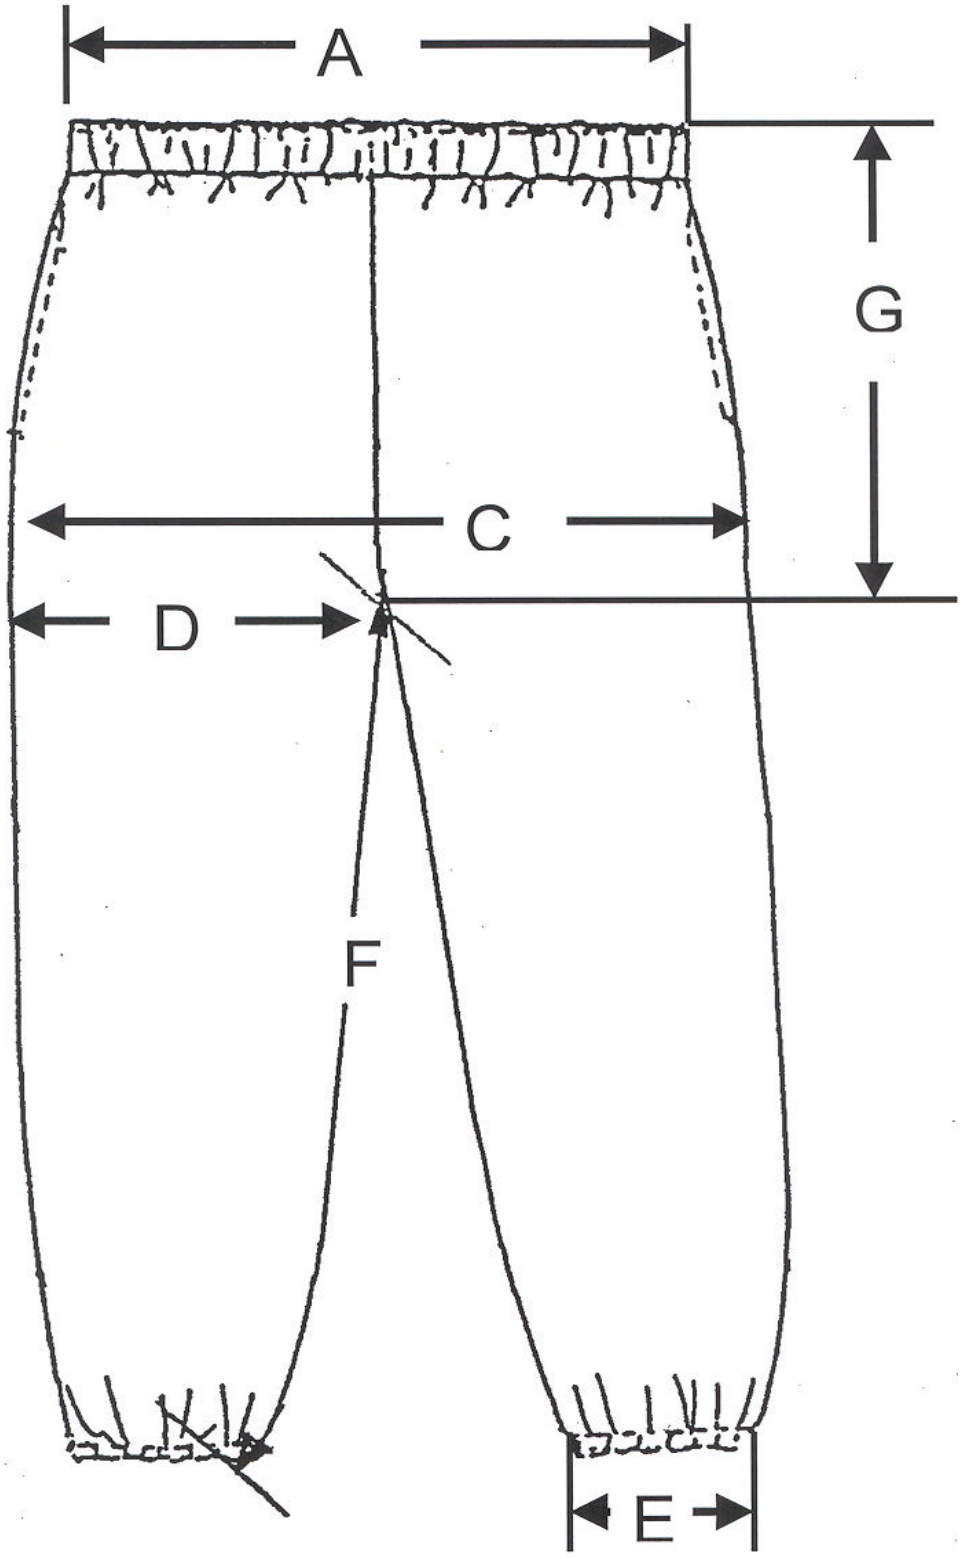


FIGURE 4 ARMY SWEATPANT, PHYSICAL CONDITIONING UNIFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.