INCH-POUND
A-A-55278A
January 2, 2001
**SUPERCEDING**
A-A-55278
May 5, 1995

# COMMERCIAL ITEM DESCRIPTION

# COVERALLS, ANTI-EXPOSURE

The General Services Administration has authorized the use of this Commercial Item Description in lieu of MIL-C-29109.

**1. SCOPE.** This Commercial Item Description covers the requirements for a hooded submarine deck exposure coverall intended for use by Navy topside personnel to provide thermal protection in extreme wet/cold environments.

**1.1. CLASSIFICATION**. The coveralls shall be in the following sizes:

Small, Medium, Large, Extra-Large, Extra-Extra-Large

## 2. SALIENT CHARACTERISTICS

2.1 Description. The fully lined coverall shall have a flexible foam interlining and two fleece-lined hand warmer chest pockets; two cargo pockets with flaps (hook and loop tape closures) on front of garment; pencil pocket (four slot) with flap on upper left sleeve; retro-reflective tape positioned vertically at center of attached hood, down the front panels, and horizontally across the center back of the garment for improved night time visibility; and a braided cord and attachable cord lock inserted within a 1/2 inch channeled hem on hood to secure closure around the neck. The braided cord shall measure 28-1/2 inches (minimum) after ends are knotted. The two chest pockets shall have horizontal bartacks at the top, vertical bartacks at the bottom and two cargo pockets shall have drain holes in the lower corners, both sleeves shall have four drain holes located on the lining according to the marks on patterns. All drain holes shall be reinforced with corrosion resistant eyelets. The front closure shall have a slide fastener and storm flap (hook and loop closure) from the neck to crotch of garment. In addition each sleeve opening shall have a slide fastener closure and each leg opening shall have a slide fastener and storm flap

**Beneficial comments, (recommendations, additions, deletions) and any data which may be of use in approving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-COCT, 700 Robbins Avenue, Philadelphia, PA 19111-5096.**

**AMSC N/A** **FSC 8415**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

(hook and loop closure). The leg bottoms, sleeves, and waistband shall have hook and loop adjustment straps. All hook and loop tape fasteners and retro-reflective tape shall be set according to marks on the pattern. The cargo pockets shall have vertical bartacks at each end of pocket openings.

2.2 Materials.

2.2.1 Outershell. The basic material shall be a 2 up 1 down right hand twill nylon cloth made from first quality, continuous filament, 210 denier, bright luster nylon yarn with a minimum of 30 filaments per yarn and shall conform to the physical requirements of Table I when tested as specified. The finished vulcanized cloth shall be coated on one side with approximately 4.0 ounces per square yard (135.6 g/m2) of chloroprene rubber suitably compounded; plasticized; and pigmented in an international orange shade. No elastomer other than chloroprene shall be used. The finished coated cloth shall conform to the physical requirements of Table II when tested as specified.

Table I - Uncoated Cloth Physical Requirements

| Characteristics | Minimum | Maximum | Test method |
|---|---|---|---|
| Weave | 2 up 1 down right hand twill | | Visual 1/ |
| Yarn | | | |
| Denier | 210 | - | 2/ |
| Filament | 30 | - | 2/ |
| Luster | bright | - | 2/ |
| Weight, oz./yd$^2$ | 3.4 | 3.6 | ASTM D3776 Option A |
| Yarns per Inch<br>Warp<br>Filling | <br>56<br>56 | <br>-<br>- | ASTM D3775 |
| Breaking Strength, lbs.<br>Warp<br>Filling | <br>225<br>210 | <br>- | ASTM-D-5034 |
| Flex stiffness, inch-lbs x $10^{-4}$<br>Warp<br>Filling | <br>-<br>- | <br>2.5<br>1.8 | ASTM-D-1388 opt. A |
| Nonfibrous Material | - | 1.0% | ASTM D629 (section 9) |
| Heat Setting Test | | | |
| Distortion or puckering | No appreciable change | | Visual 3/ |
| Colorfastness to:<br>Laundering<br>Dry Cleaning<br>Light | <br>"Good"<br>"Good"<br>"Good" | | <br>AATCC 61 test 1A 4/<br>AATCC 132<br>AATCC 8 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Table I - Uncoated Cloth Physical Requirements (continued)

| | | | |
|---|---|---|---|
| Crocking, Munsell Value | - | 8.5 | AATCC 16 option A 7/ |
| Sulfur content | No more labile sulfur than shown by the standard sample | | 8/ |
| PH | 5.0 | 8.5 | AATCC-81 |
| Copper content | - | 0.003% | ASTM-E-1452 |
| Manganese Content | - | 0.0015% | ASTM-E-1452 |

1/ One determination per sample unit and the results reported as "pass" or "fail".

2/ A certificate of compliance will be acceptable for this requirement.

3/ The test specimen shall consist of a square of cloth at least 12 by 12 inches, marked off with a square 10 by 10 inches. The test specimen shall be placed in an oven maintained at 280°F ±2° for a period of 2 hours. The specimen shall be removed from the oven and conditioned under standard atmospheric conditions. The specimen shall then be measured for dimensional changes. The measurements shall be made at least 1 inch from the edge of the square and at the center of the square in the warp and filling direction. The specimen shall then be visually compared with the original unheated fabric for distortion, or puckering. One specimen shall be tested from each sample unit. The dimensional change of the sample unit in the warp and filling direction shall be the average of the specimens tested from each direction, respectively, and shall be reported separately to the nearest 0.1 percent. Distortion and puckering shall be reported as "pass" or "fail".

NOTE: When cutting the samples, make certain the twill line goes from the lower left to the upper right in a 45 degree angle.

4/ One determination per sample unit and the dimensional change reported to the nearest 0.1 percent.

5/ **Samples shall be conditioned** as directed in "D1776 Practice for Conditioning Textiles for Testing" prior to testing.

6/ The specimens must be dried after each of the three laundering cycles. The soap solution shall contain 0.5 percent by weight, P-D-245, Detergent, Laundry, and Hand Dishwashing (Granular) Type II, in water hardness not over 50 parts per million. The specimen weight shall be 4.0 ±0.5 grams and the rotating time shall be 30 minutes with ten stainless steel balls in each cylinder.

7/ When a color change equal to Step 4 on the Gray Scale is evident in either the evaluation sample or the standard sample, exposure shall be continued for an additional number of hours equal to the number of hours at which the color change was apparent. Specimens which do not show a color change until 80 AFU's shall be returned to the machine for a total exposure period not to exceed 140 hours.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

8/ In the determination of presence of labile sulfur in textile materials with lead acetate, two 1.50 ± 0.01 gram samples from each material submitted for evaluation shall be tested. Each of the two samples shall be cut into very small pieces and placed into separate test tubes. The samples shall be submersed in a stannous chloride solution that contains 100 grams of stannous chloride crystals ACS in 100 milliliters of hydrochloric acid ACS (35 percent concentration) and 50 milliliters of distilled water. A filter paper wet out with a 5.0 percent lead acetate solution shall be placed over top of the test tube. The lead acetate solution contains 5.0 grams of lead acetate CP reagent grade and enough distilled water to make up a 100 milliliters solution; if the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The test tube containing the textile sample, stannous chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

Free – the filter paper shows no discoloration or staining of any kind.
Slight – The filter paper shows a light tan to light brown discoloration stain.
Moderate – The filter paper shows a dark brown discoloration stain.
Severe – The filter paper shows a black color stain.

Table II - Coated Cloth Physical Requirements

| **Characteristic** | **Minimum** | **Maximum** | **Test Method** |
|---|---|---|---|
| Weight, oz./yd.$^2$ | 7.0 | 9.0 | ASTM D3776 Opt. 7 |
| Breaking strength, lbs.<br>Warp<br>Filling | <br>225<br>210 | | ASTM D5034 |
| Tear strength, grams<br>Warp<br>Filling | <br>4500<br>3500 | | ASTM D1424 1/ |
| Hydrostatic Resistance, lbs./in$^2$<br><br>Initial<br><br>After 5 launderings<br><br><br>After 40 hours weatherometer | <br><br>100<br><br>80<br><br><br>80 | - | <br><br>ASTM D751 2/ 12/<br><br>AATCC-96 VI A<br>ASTM D751 2/ 8/<br><br>AATCC-111A opt. 4<br>ASTM D751 2/ 8/ |
| Flex stiffness, inch-lbs. x $10^{-4}$ at $70^oF$<br>Warp<br>Filling | <br>-<br>- | <br>9.0<br>7 | ASTM-D-1388 3/ 4/ |
| Flex stiffness, inch-Lbs x $10^{-4}$ at $-20^oF$<br>Warp<br>Filling | <br>-<br>- | <br>25<br>25 | ASTM-D-1388 3/ 5/ |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Table II - Coated Cloth Physical Requirements (continued)

| | | | |
|---|---|---|---|
| Resistance to heat at 160°F | No evidence of tackiness, exudation, or loss of flexibility | - | ASTM-D-5034 |
| Adhesion of coating, lbs. per 2 inch width | 10 | - | ASTM-D-751 |
| Blocking, scale rating | - | No. 2 | ASTM-D-751 |
| Dusting powder Resistance to dry crocking | "good" | - | AATCC 8 6/ |

1/ Standard instrument with one augmenting weight.

2/ The water pressure shall be applied only to the uncoated side of the test specimens.

3/ Ten specimens shall be tested and averaged, five with the coated side up and five with the coated side down.

4/ Prior to performing this test, the test specimens shall be conditioned for at least four hours at the specified temperature.

5/ Prior to performing this test, the test specimens shall be conditioned for one hour at the specified temperature.

6/ The test shall be conducted using the blue/black crock cloth.

7/ Samples shall be conditioned as directed in "D1776 Practice for Conditioning Textiles for Testing" prior to testing.

8/ Procedure A -Pressure application by Mullen type Hydrostatic Tester, sections 34-37, Procedure 1 (except that the rate of displacement shall be as specified in section 34.2) shall be used.

2.2.2 Foam Interlining. The foam interlining shall be unicellular closed cell foam, 3/16 inch in thickness, made from an expanded supersoft polyvinyl-chloride plastic material. The finished material shall comply with U.S. Coast Guard Regulations CFR 164.015 for type A foam.

2.2.3 Lining. The lining material shall be nylon taffeta; fully heat set at a Minimum temperature of $400^0$ F ($204^0$C) The shade shall be black. The yarn shall be continuous filament, semi dull or equal for the warp and filling and shall conform to the physical requirements of Table III when tested as specified.

2.2.4 Fusible Interlining. The fusible interlining utilized to impart stiffness to flaps and closures shall be of a type suitable for the intended end use.

2.2.5 Fleece lining. The fleece lining for the chest pockets shall be made of 100% polyester, 6.4 oz/yd$^2$, 32 gauge knit fabric.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Table III. - Lining Cloth Physical Requirements

| Characteristic | Minimum | Maximum | Test Method |
|---|---|---|---|
| Weave | Plain | - | Visual 1/ |
| Yarn Denier | - | 70 | 2/ |
| Weight oz./yd.2 | 1.9 | 2.0 | ASTM D3776 opt. C 8/ |
| Yarns per inch<br>Warp<br>Filling | <br>106<br>92 | | <br>ASTM D3775 8/ |
| Break strength, lbs.<br>Warp<br>Filling | <br>110<br>95 | <br>-<br>- | <br>ASTM D5034<br>ASTM D5034 |
| Tear strength, lbs.<br>Warp<br>Filling | <br>3.64<br>2.97 | <br>-<br>- | <br>ASTM-D1424 3/<br>ASTM-D1424 3/ |
| Flex stiffness, inch-lbs. X $10^{-4}$<br>Warp<br>Filling | <br>-<br>- | <br>1.5<br>0.5 | ASTM-D-1388 |
| Dynamic Absorption (max)<br>Initial<br>after 3 launderings | 8% max. for avg. of sample units and 10% max. For any individual sample. | - | AATCC-70<br>AATCC-96 9/ 10/ 11/ option 1c<br>AATCC-70 4/ |
| Spray rating (3 samples)<br><br>Initial<br>After 3 launderings | <br><br>100, 100, 90<br>80, 80, 70 | | AATCC 22 12/<br>AATCC 96 option Ic 9/ 10/ 11/<br>AATCC 22 4/ 12/ |
| Nonfibrous Material | - | 1.0% | ASTM-D-629 (section 9) |
| Heat Setting Test<br>Distortion or puckering<br>Dimensional change | <br>No appreciable change | <br><br>2.0% | <br>5/ 6/<br>5/ 6/ |
| Colorfastness to:<br>Laundering<br>Dry cleaning<br>Perspiration<br>Light<br>Crocking | <br>"good"<br>"good"<br>"good"<br>"good"<br>3.0 | <br>-<br>-<br>-<br>-<br>- | <br>AATCC 61 test 1A 13/<br>AATCC-132<br>AATCC 15 14/<br>AATCC 16 option A 7/<br>5/<br>AATCC 8 |
| PH | 5.0 | 8.5 | AATCC 81 |

1/ One determination per sample unit and the results reported as "pass" or "fail".

2/ A certificate of compliance will be acceptable for the stated requirement.

3/ Standard instrument with one augmenting weight.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

4/ Specimens shall be subjected to 3 complete cycles (wash and dry) prior to determination of dynamic absorption and spray rating.

5/ One determination per sample unit and the dimensional change reported to the nearest 0.1 percent.

6/ The test specimen shall consist of a square of cloth at least 12 by 12 inches marked off with a square 10 by 10 inches. The test specimen shall be placed in an oven maintained at 280°F ±2° for a period of 2 hours. Then the specimen shall be removed from the oven and conditioned under standard atmospheric conditions. The specimen shall then be measured for dimensional changes. The measurements shall be made at least 1 inch from the edge of the square and at the center. The specimen shall then be visually compared with the original unheated fabric for distortion, or puckering. One specimen shall be tested from each sample unit. The dimensional change of the sample unit in the warp and filling direction shall be the average of the specimens tested from each direction, respectively, and shall be reported separately to the nearest 0.1 percent. Distortion and puckering shall be reported as "pass" or "fail".

7/ Total exposure time shall be 20 hours.

8/ Samples shall be conditioned as directed in "D1776 Practice for Conditioning Textiles for Testing" prior to testing.

9/ Sample size shall be 22 by 22 inches with 18 inch benchmarks, 6 inches apart.

10/ Use Drying Procedure (D) or samples may be dried using a thermostatically controlled circulating oven at 221° - 230°F until dried. The sample shall be allowed to cool for 5 minutes, sprinkled with water to permit damp pressing, and allowed to stand in this condition for 5 minutes.

11/ The dampened specimens shall be pressed with a flatbed press as described in AATCC 96 Section 5.2 or a hand iron as described in AATCC 96 Section 5.10 at a temperature of 275° to 300° F. Section 7.4 of AATCC 96 shall not apply.

12/ Each sample shall be 7 inches by 7 inches.

13/ The specimen must be dried after each of the three laundering cycles. The soap solution shall contain 0.5 percent by weight, P-D-245, Detergent, Laundry, and Hand Dishwashing (Granular) Type II, in water hardness not over 50 parts per million. The weight of the specimen shall be 4.0 +0.5 grams and the rotating time shall be 30 minutes with ten stainless steel balls in each cylinder.

14/ The test for colorfastness for acid and alkaline solution shall apply.

15/ When a color change equal to Step 4 on the Gray Scale is evident in either sample being evaluated or the standard sample, exposure shall be continued for an additional number of hours equal to the number of hours at which the color change was apparent. Specimens which do not



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

show a color change until 80 AFU's shall be returned to the machine for a total exposure period not to exceed 140 hours.

2.2.6 Leg bottom mesh. The knit mesh material used for drainage at the bottom of the leg opening shall be apex mills Corporation Style D51 or equal. The knit mesh shall finish approximately 2 to 3 inches in height around the circumference of the leg bottom.

2.2.7 Draw Cord. The drawcord with tip for securing the hood around the neck, shall be made of black polypropylene material, 1/8 inch in width, conforming to W.M. Jetty style #48 or equal.

2.2.8 Cord Lock. The plastic cord lock to be used on the draw cord shall be Waterbury Buckle Co. #304-000 or YKK Style #LCSR, or equal.

2.2.9 Retro-reflective tape. The retro-reflective tape used on the hood, front panels and back shall be 3M "scotchlite" #8930 or equal.

2.2.10 Thread. The thread for seaming and stitching the coveralls shall be nylon conforming to Type II, Class A, size E of V-T-295. The color of the thread shall approximate the shade of the outershell and the lining materials respectively.

2.2.11 Slide fasteners. The slide fasteners shall conform to the requirements of A-A-55634, size MS for the sleeves and size MHS for the leg openings and front closure. (individual element molded plastic with a minimum crosswise breaking strength of 160 lbs.) black in color and equipped with plastic sliders. The thong shall be 3/8 inch wide by 2 inches belt looped outershell material.
Slide fastener lengths are 7 inches for sleeve openings and 14 inches for leg openings. The slide fasteners for the sleeve openings and leg openings shall conform to type I, Style 3 of A-A-55634.

2.2.12 Front closure. The slide fastener for the front closure shall conform to Type I, Style 15 of A-A-55634.

2.2.13 Eyelets. The corrosion resistant eyelets for the drainholes shall have an inside diameter of 7/32 inch and a black chemical finish.

2.2.14 Hook and loop fastener tape The matching hook and loop fastener tape shall conform to type II, class 3, of A-A-55126. The color shall be black.

2.3 Label/marking. The label shall be centered on the inside of the back with the top edge of the label parallel to and 1-1/2 to 2 inches below the top raw edge of the back. Stitch to lining material only on all four sides of label, 1/8 inch from the edge. A commercial type label is acceptable, provided that the following information is included on the commercial label.
COVERALLS, ANTI-EXPOSURE
FIBER CONTENT: 100% NYLON
SIZE: Small (Example)
STOCK NUMBER: 8415-00-000-0000 (Example)
CONTRACT NUMBER: SPO-100-00-0-0000 (Example)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

NAME OF CONTRACTOR:
LAUNDER BY HAND IN WARM WATER WITH MILD SOAP AND HANG TO DRY.

2.3.1 Label/tag. Each item shall be individually bar-coded with a tag for personal clothing items. The non-permanent tags shall be attached to each item, and shall be clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified.

2.4 Patterns. The government shall furnish a complete set of patterns or a master pattern with grade rules, to maintain uniformity and consistency in manufacturing. The government patterns shall be used to create the contractor's working patterns. Minor modifications are permitted to accommodate manufacturing procedures, however the finished dimensions, serviceability and appearance shall be maintained.

.

Table IV. Pattern parts

| Computer name | Specification name | Cut parts |
|---|---|---|
| **OUTERSHELL** | | |
| LEFTFRT | Left front | 1 |
| RIGHTFRT | Right front | 1 |
| UPPERBK | Upper back | 1 |
| LOWERBK | Lower back | 2 |
| LFRTSLV | Left front sleeve | 1 |
| RFRTSLV | Right front sleeve | 1 |
| BKSLV | Back sleeve | 2 |
| CNTRHD | Center hood | 1 |
| RSDEHD | Right side hood | 1 |
| LSDEHD | Left side hood | 1 |
| HDCASING | Hood casing | 1 |
| WAISTADJST | Waist adjuster strap | 1 |
| CHESTPKT | Chest pocket | 2 |
| THIGHPKT | Thigh pocket & pocket flap (1 piece) | 2 |
| PENPKTFLP | Pen pocket flap | 1 |
| UPPENPKT | Upper pen pocket | 1 |
| LOPENPKT | Lower pen pocket | 1 |
| FSTORMFLP | Front storm flap | 1 |
| LEGFLP | Leg flap | 2 |
| LEGTKUPTAB | Leg take up tab | 2 |
| WAISTTUNEL | waist tunnel | 1 |
| WRISTADJST | Wrist adjuster strap | 2 |
| WAISTTUNEL | Waist tunnel | 1 |
| LWRPKTFLP | Pen pocket flap | 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Table IV. Pattern parts continued

| Computer name | Specification name | Cut parts |
|---|---|---|
| **LINING** | | |
| FRONT-L | Front lining | 2 |
| UPPERBK-L | Upper back lining | 1 |
| LOWERBK-L | Lower back lining | 2 |
| SLEEVE-L | Sleeve lining | 2 |
| SDEHD-L | Side Hood lining | 2 |
| CNTRHD-L | Center Hood lining | 1 |
| **FOAM** | | |
| FRONT-F | Foam upper front | 2 |
| LWRFRONT-F | Lower Front Foam | 2 |
| UPPERBK-F | Upper back Foam | 1 |
| LOWERBK-F | Lower Back Foam | 2 |
| SLEEVE-F | Sleeve Foam | 2 |
| CNTRHD | Center Hood Foam | 1 |
| SDEHD-F | Side Hood foam | 2 |
| **FLEECE** | | |
| CHSTPKT-FL | Chest Pocket Piece | 2 |
| **MESH** | | |
| FRTLEG-ME | Front leg mesh | 2 |
| BKLEG-ME | Back leg mesh | 2 |
| **INTERLINING** | | |
| LOWPKT-P | Thigh pocket flap interlining | 2 |
| LEGFLP-P | Leg flap interlining | 2 |
| FSTOMFLP-P | Front storm flap interlining | 1 |
| PPKTFLP-P | Pen pocket flap interlining | 1 |
| WRISTADJ-P | Wrist adjuster strap interlining | 2 |
| WAISTADJ-P | Waist adjuster strap interlining | 1 |

Patterns not provided for the following:
Zipper pulls (Thongs), cut 1 inch wide and 8 inches long.
Bias binding for lining 2-1/2 inches wide

2.4.1 Seams and Stitching. The coveralls shall be constructed in accordance with ASTM-D-6193 using the 301 stitch type, stitch type 503, 504 or 602 shall be used for overedging, as an alternate to separate seaming and overedging stitch type 515, 516 or 519 may be used. The stitches per inch for all operations shall be 8 to 10. All hook and loop tape and retro-reflective tape shall be stitched 1/8 to 3/16 inch from the edge. The bottom and sides of pocket flaps shall be double stitched 3/16 to 1/4 gage, 1/16 to 1/8 inch from the edge. The top of the pocket flaps shall be



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

stitched down 3/8 from the edge to bury raw edges within the seam. All pockets shall be stitched 1/16 to 1/8 inches from the edge. The hood back seams shall be turned toward the center and top stitched 1/16 from the edge.

2.4.2 Sizes and Measurements. The finished coveralls shall conform to the measurements below. All measurements and tolerances are expressed in inches.

Table V. Measurements (in inches)

| Sizes | Chest | Leg inseam | Length | Sleeve inseam |
|---|---|---|---|---|
| | | | | |
| Small (36-38) | 45 | 29 | 62 | 22 |
| Medium (40-42) | 49 | 29-1/2 | 63-3/4 | 22-1/2 |
| Large (44-46) | 53 | 30 | 65-1/2 | 23 |
| X-Large (48-50) | 57 | 30-1/2 | 67-1/4 | 23-1/2 |
| XX-Large (50-52) | 59 | 31 | 69 | 24 |
| | | | | |
| Tolerance | ±1 | +1/2 | ±3/4 | ± 1/2 |

Note: Refer to Figure 1 for A, B, C, and D.

A. Twice the measurement taken across the front at base of armholes, folded edge to folded edge.

B. Measurement shall be taken from the junction of crotch and seat seam along inseam to bottom of leg.

C. Measurement shall be taken form the intersection of shoulder and hood seams to bottom of hemmed leg.

D. Measurement shall be taken from base of armhole along sleeve inseam to bottom of sleeve.

## 4. REGULATORY REQUIREMENTS

4.1. Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantages life cycle costs.

## 5. QUALITY ASSURANCE PROVISIONS

5.1 Product Conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

5.1.2 Visual examination. Each liner shall be examined for the defects listed below:

Table VI. Defects

| **Material defects** | **Major** | |
|---|---|---|
| Cloth-Any hole, cut, tear, mend, burn, smash, burn or needle chew, any ply having a darn or mend, exposed drill holes. | 101 | |
| Component and assembly<br>Any component part missing, tight, twisted, distorted, puckered, or pleated; pockets horizontally misaligned, slide fastener operation not smooth | 102 | |
| **Seams and stitching** | | |
| -End of stitching not caught in other seams or not securely backstitched | 103 | |
| -Pleated or puckered, twisted or loose seam irregular, open, weak; | 104 | |
| -shade of thread on outside not as specified | 105 | |
| -End of stitching backstitched less than 1/2 inch | | 201 |
| -Topstitching too close to edge | | 202 |
| **Hook and loop**<br>Any hook and loop out of alignment or not fastening properly<br>Width or length not as specified, not sewn 1/8 to 3/16 inch from the edge. | 106 | |
| **Measurements** | | |
| Any measurement deviating from nominal dimensions and tolerances specified. Leg inseam and arm inseams uneven by 1 inch or more. | 107 | |
| **Label.** Label missing, incorrect, incomplete, or illegible | 108 | |

5.2 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

## 6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

## 7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Suggested sources of supply. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

A suggested source of supply for the Leg Bottom Mesh is Apex Mills Corporation, 168 Doughty Blvd., Inwood, NY 11696.

A suggested source of supply for the drawcord is W.M Jetty & Son Inc., 68 Salem St., Providence, RI 02907.

A suggested source of supply for the Cord Lock is I.T.W. Waterbury Buckle, 952 South Main St., Waterbury, CT 06721 or YKK, Northeast Division, 1251 Valley Brook Avenue, Lyndhurst, NJ 07071 .

A suggested source of supply for the Retro-reflective Tape is Safety and Security Systems Division/3M, Building 223-3N-01, 3M Center, St. Paul, MN 55144-1000.

MILITARY INTERESTS:

CUSTODIANS
Navy - NU

CIVIL AGENCY COORDINATING ACTIVITY

ACTIVITY:
GSA - FSS

REVIEW
Navy - SH

PREPARING ACTIVITY:
DLA - CT

Project number (8415-0188)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.


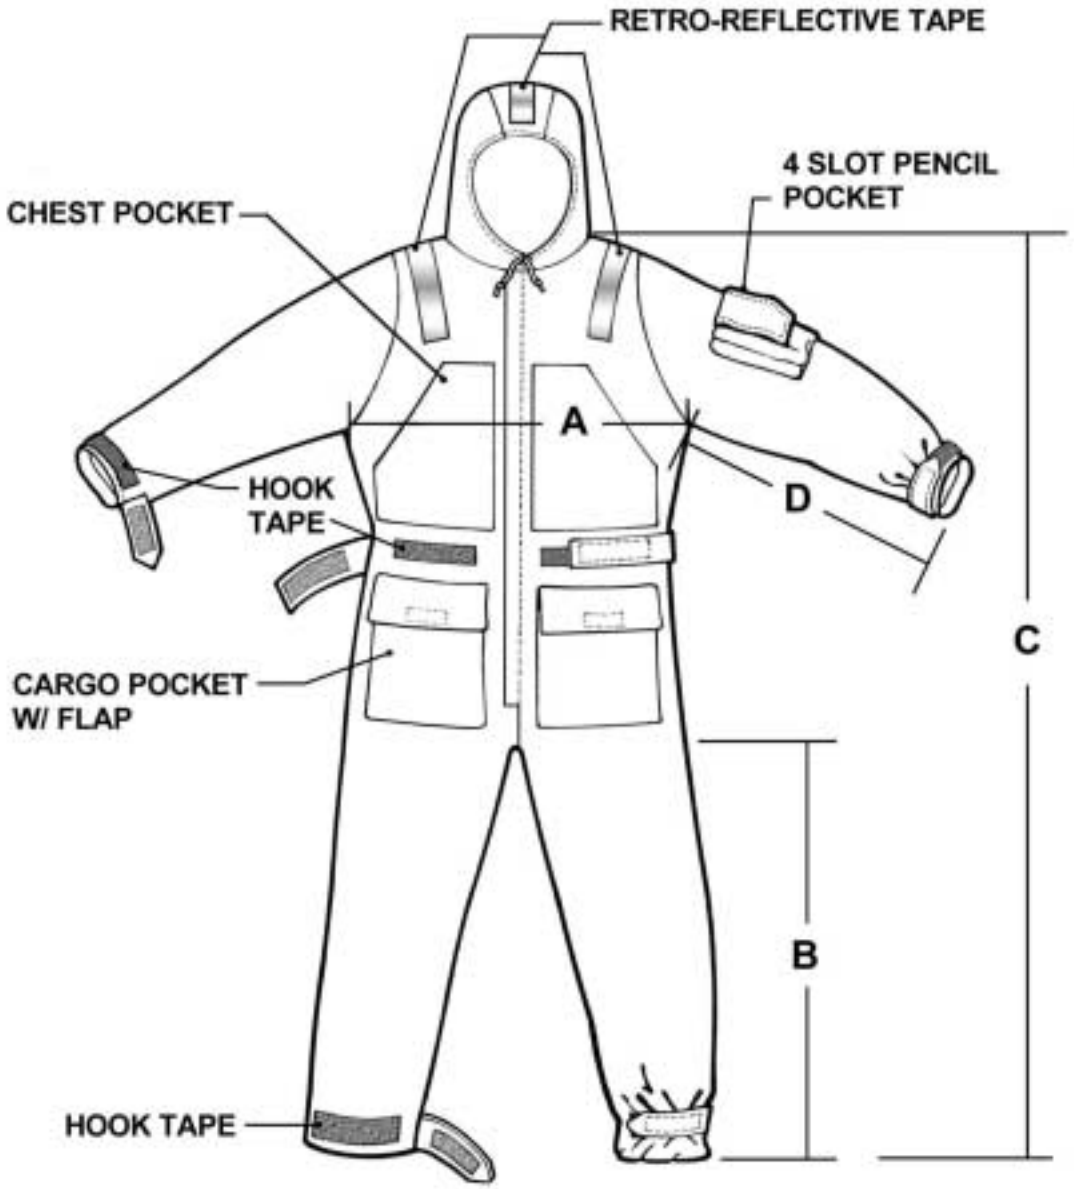



FIGURE 1



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

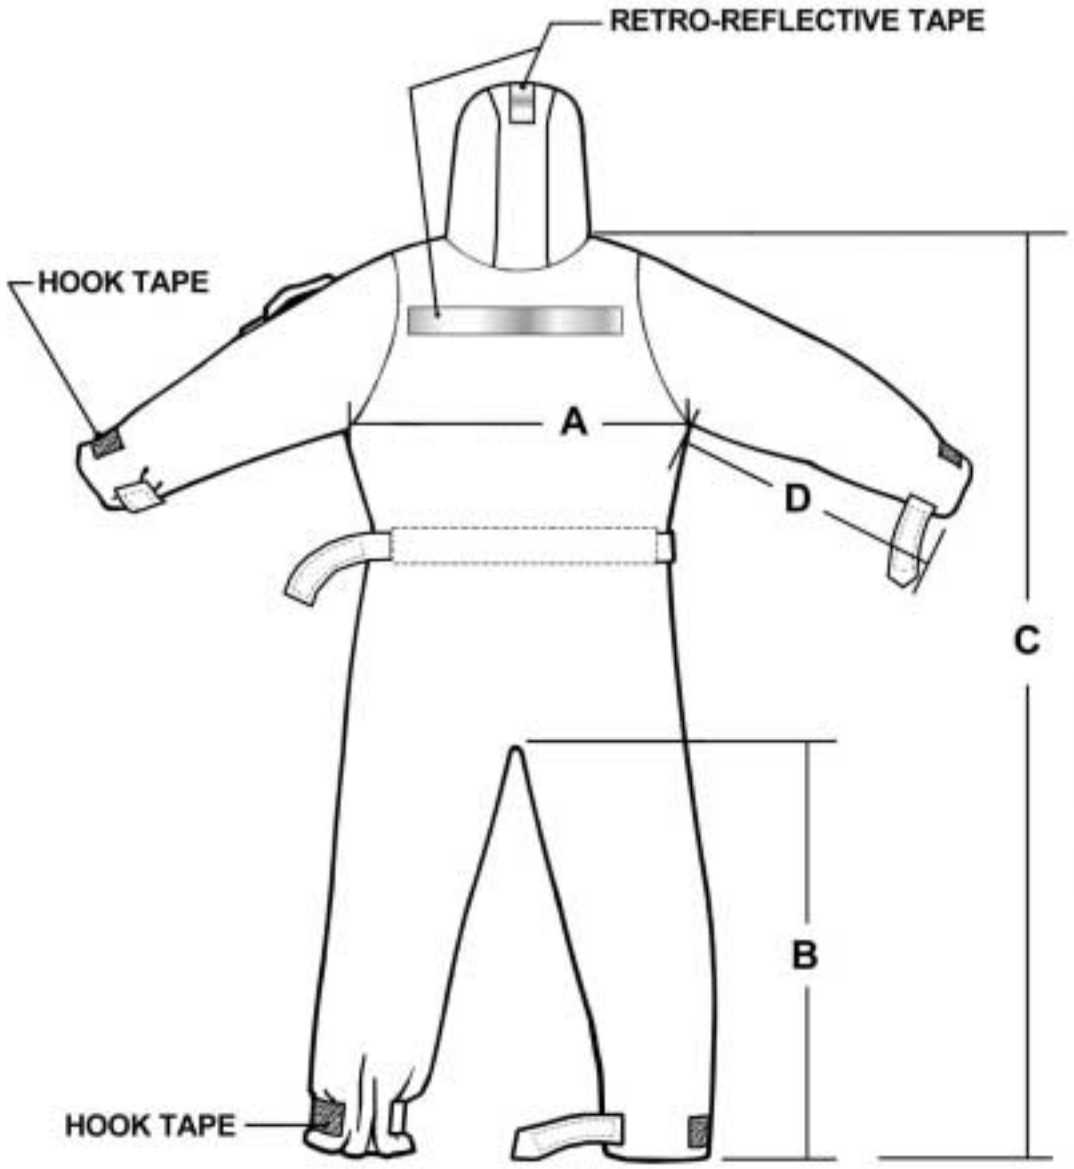


**ANTI-EXPOSURE COVERALL**

**BACK**

FIGURE 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.