INCH-POUND
A-A-55282
September 13, 1996

COMMERCIAL ITEM DESCRIPTION

HAMMOCK, JUNGLE, M-1965

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-H-43132.

1. SCOPE. This commercial item description covers the requirements for one type and size hammock. The hammock is intended for use as sleeping equipment in jungle areas to afford the user protection from rain and insects. By running poles through the pole sleeves an improvised litter can be formed for transporting incapacitated personnel.

2. SALIENT CHARACTERISTICS

2.1 General description. The hammock shall consist of a 85 by 34 (± 1) inch sleeping panel with 74 by 4-5/8 inch pole sleeves along each side; a 85-1/4 by 46 (± 1) inch top canopy of coated fabric with stretch cord loops at each end; head and foot panels of same material as the sleeping panel; insect netting with approximately a 29 inch by 57 inch width side panel and approximately a 20 inch by 74 inch top panel; and tie cords for attaching spreader sticks (See Figure 1). The net side panels are fastened to the head and sleeping panel by a nylon hook and pile fastener tape. Bridle lines and cords are attached at each end for suspending the hammock.

2.2 Materials

2.2.1 Cloth, nylon. The nylon cloth shall be a plain weave, with a weight of 3.8 (minimum) to 4.8 (maximum) ounces per square yard and a minimum yarns per inch of 80 in the warp and 56 in the filling. The cloth shall have a minimum breaking strength of 275 pounds in the warp and 225 pounds in the filling. The color of the cloth shall be Camouflage Green 483, and shall show good fastness to laundering and weathering. The cloth shall be given an approved fluorocarbon water repellent treatment as specified in the contract or purchase order. The cloth shall be tested as specified according to the following test methods: ASTM-D 3776 (Option C) for weight; ASTM-D 3775 for yarns per inch; ASTM-D 5034 (Grab method) for breaking strength; 5614 of FED-STD-191 - Textile Test Methods for colorfastness to laundering; and 5671 of FED-STD-191 for colorfastness to accelerated weathering.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. *Approved for public release; distribution is unlimited.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

2.2.2 Cloth, netting. The cloth for the netting shall be nylon or polyester netting. The yarn for the nylon cloth shall be 70 denier, bright or semi-dull multifilament nylon with sufficient twist, with a maximum weight of 1.6 ounces per square yard. The cloth shall have a minimum of 54 yarns per inch in the warp and a maximum of 56 yarns per inch in the filling, and a breaking strength of 50 pounds minimum in the warp and filling directions. The cloth shall be woven with three picks of plain and one pick of leno. The yarn for the warp knitted polyester netting shall be 70 denier, semi-dull, regular tenacity, multifilament polyester with sufficient twist, with a maximum weight of 2.0 ounces per square yard, and a minimum breaking strength of 50 pounds in the length and width. The netting shall be of the mesh type utilizing the pillar inlay principal to form a rectangular shaped mesh. The color of the finished cloth or netting shall be Camouflage Green 483 and shall show good colorfastness to laundering and accelerated weathering. The cloth shall be tested as specified according to the following test methods: ASTM-D 3776 (Option C) for weight; ASTM-D 3775 for yarns per inch; ASTM-D 5034 (Grab method) for breaking strength; 5614 of FED-STD-191 - Textile Test Methods for colorfastness to laundering; and 5671 of FED-STD-191 for colorfastness to accelerated weathering.

2.2.3 Cloth, coated, nylon. The base cloth for the coated cloth shall be a rip-stop weave nylon cloth, polyurethane coated (one side only) and weigh 2.5 (minimum) to 3.25 (maximum) ounces per square yard. The cloth shall have a minimum breaking strength of 50 pounds in the warp and filling, and a minimum tearing strength of 700 pounds in the warp and 900 pounds per square yard in the filling. The coating adhesive strength shall be a minimum of 7.0 pounds per 2 inch width. The cloth shall be Camouflage Green 483 and show good fastness to crocking and weathering. The cloth shall be tested as specified according to the following test methods: ASTM-D 3776 (Option C) for weight; ASTM-D 5034 (Grab method) for breaking strength; 5970 of FED-STD-191 - Textile Test Methods for adhesion to coating; 5671 of FED-STD-191 for colorfastness to accelerated weathering; and AATCC-8 for colorfastness to crocking.

2.2.4 Thread, polyester. The thread shall be multifilament polyester, soft unbonded, finished with an approved nonwicking finish as specified in the contract or purchase order uniformly applied. The thread shall be either 2, 3, or 4 ply with a length per pound of 8,500 to 17,600 yards. It shall have a minimum breaking strength of 2.0 pounds and a maximum elongation of 26 pounds. The thread shall be dyed Camouflage Green 483 and shall show good colorfastness to laundering (after 3 cycles). The thread shall be tested as specified according to the following test methods: ASTM-D 1907 for yards per pound; ASTM-D 2256 (Single strand method) for breaking strength and elongation; and test method 5610 of FED-STD-191 - Textile Test Methods for colorfastness to laundering.

2.2.5 Cord, polyester. The cord for the bridle lines, combination net suspension and tie lines, and canopy suspension lines shall be a solid braided polyester, 3/32 inch diameter with a minimum breaking strength of 205 pounds and 25% maximum elongation at 205 pound load. The cord for the sleeping panel suspension lines shall be 1/4 inch diameter, with a minimum breaking strength of 1200 pounds and 20% maximum elongation at 1200 pound load. The color of the cord shall be Camouflage Green 483 and shall show good colorfastness to weathering. The cord shall be tested as specified according to the following test methods: 6016 of FED-STD-191 - Textile Test Methods for breaking strength and elongation; and 5671 of FED-STD-191 for colorfastness to accelerated weathering. All cut ends of cords shall be fused prior to assembly.

2.2.6 Cord, elastic, braided nylon. The elastic cord shall be 3/16 inch diameter and made of a heat resistant compound of natural or synthetic rubber or a combination of both. The cord shall have a minimum weight of 35 ounces per linear yard. The color shall be Camouflage Green 483 and shall show good fastness to laundering, crocking and weathering. The cord

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

shall be tested as specified according to the following test methods: ASTM-D 3776 (Option C) for weight; 5614 of FED-STD-191 - Textile Test Methods for colorfastness to laundering; AATCC-8 for colorfastness to crocking; and 5671 of FED-STD-191 for colorfastness to accelerated weathering.

2.2.7 Webbing, nylon. The webbing shall be nylon, 3/4 inch wide, 0.025 inches thick with a maximum weight of 0.32 ounces per linear yard, and a minimum breaking strength of 600 pounds The color of the finished webbing shall be Camouflage Green 483 and shall show a minimum rating of good fastness to light, laundering and crocking. The webbing shall be tested as specified according to the following test methods: ASTM-D 3776 (Option C) for weight; 4108 of FED-STD-191 - Textile Test Methods for breaking strength; 5660 of FED-STD-191 colorfastness to light; 5614 of FED-STD-191 - colorfastness to laundering; and 5651 of FED-STD-191 - colorfastness to crocking. All cut ends of nylon webbing shall be fused prior to assembly.

2.2.8 Lace, nylon. The nylon yarn for braiding the laces shall be spun from nylon staple, twisted into a 2-ply yarn, tubular braided using a two over and two under braiding without a core. The lace shall have a width of 10/32 $\pm$ 1/32 inches, a minimum of 26 picks per inch and a minimum breaking strength of 175 pounds. The dyed laces shall show good colorfastness to water. The laces shall be tested as specified according to the following test methods: 6016 of FED-STD-191 - Textile Test Methods for breaking strength; and 5630 of FED-STD-191 for colorfastness to water. All cut ends of nylon lace shall be fused prior to assembly.

2.2.9 Fastener tapes, hook and pile. The tape shall be fabricated of synthetic nylon yard, with a minimum weight of 3.5 grams per linear yard and a minimum breaking strength of 105 pounds when tested as specified according to ASTM-D 3776 (Option C) for weight and ASTM-D 5034 (Grab method) for breaking strength. The hook (216 hooks per linear inch minimum) and loop pile (52 picks per inch minimum) tapes shall be of woven, warp pile, narrow fabric construction. The hook and pile tape shall have multifilament ground ends (including selvages) and picks, leno woven, 5/8 inches in width.

2.2.10 Grommet, metallic. The grommets shall be a rolled rim grommet, plain with spur washer, size 0.

2.2.11 Plate, suspension. The equi-sided triangular shaped suspension plate shall be approximately 3 inches in length and 1/8 (0.125) inches thick. The plate shall have five equally spaced 0.205 inch diameter holes, 1/2 inch apart and 1/4 inch from the bottom with a single 0.358 inch diameter hole, 5/84 inches from the top (See NCTRF Drawing 16-1-84, Plate Suspension (See 6.1).

2.2.12 Kit, Maintenance. The kit shall consist of an instruction sheet and ten patches (6 by 2 inches with rounded corners) made of pressure sensitive adhesive electrical tape and covered on the adhesive side with release paper centrally slit, in a clear untinted polyethylene envelope, with the inside dimensions sufficient to accommodate the ten patches and provide a folded-over end approximately one inch long. The patches and instruction sheet shall be placed in the envelope so that the instructions are readable through the polyethylene envelope. The color of the patches shall be Camouflage Green 483. The kit shall be supplied with each hammock. The instruction sheet shall have the following legend printed thereon:

> To seal leaks in canopy and to repair rips and tears in canopy, hammock or netting: Remove release paper from patch and apply patch by hand pressure to damaged area. Overlap patches for longer tears. Apply patch to coated (outer) side of canopy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

NOTE: The instruction sheet shall have the name of the manufacturer and month and year of manufacture printed at the bottom.

2.2.13 Label/tag. Each hammock shall have an identification label and instruction tag. The instruction tag shall be approximately 5-1/4 inches by 4 inches and made of paper stock with a finished surface not calendered or pigmented to a degree that would cause the obliteration of printed, stamped or typed marking. The tying cord shall be cotton string doubled to 8 inches long and the tag shall have a reinforced eyelet for attaching the cord. Each hammock shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

2.2.13.1 Marking. The letters "US" in black bold face characters 2 $\pm$ 1/4 inches high, shall be stamped, stenciled or printed in the center of the outside of the sleeping panel.

2.2.14 Patterns. Standard patterns, which provide a 3/8 inch seam allowance for single needle stitching and 1/2 inch seam allowance for double needle stitching, will be furnished by the Government. Commercial patterns may be used in lieu of the Government furnished pattern provided they conform to the cited design and finished measurements.

3. Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR) to the maximum extent practicable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, and as applicable, conform to the producer's own drawings, specifications, standards and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

4.2 Market Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order. The hammock offered, or generically similar hammock as described herein, must have been sold to the commercial market or to the Government for at least 2 years. The contractor shall certify and provide supporting documentation as to its serviceability and the long term (five (5) years) availability of all necessary maintenance and logistics support parts and materials.

4.3 Visual examination. The hammock shall be examined for the defects listed below.

4.3.1 Defects. General: Any hole, cut or tear; color not as specified or shaded parts when required to be cut from one piece of material; any spot or stain (outside); raw edges, open seams, thread ends not removed or loose tension resulting in loose seams; any material or hardware defects, distorted parts or poor workmanship; any component part or operation omitted or not as specified. Suspension Plate: Broken or malformed; any sharp or rough edge; finish omitted. Identification label: label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar-coded type not as specified; code density not as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

specified. Instruction tag: tag missing, incorrect, or illegible, or not as specified. Maintenance kit: missing or not as specified. Dimensions: The finished hammock shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one finished hammock.

5. PACKAGING

5.1 Preservation, packing and marking. The preservation, packing and marking shall be as specified in the contract or order.

6. NOTES

6.1 Drawing. Navy Clothing and Textile Research Facility Drawing 16-1-584 - Plate, Suspension, for Hammock, Jungle; Assembly and Details can be obtained from the procuring activity issuing the invitation for bids.

6.2 Source of Government documents. Copies of Military and Federal documents are available from:

Department of the Navy, Defense Printing Service, Detachment Office, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094

6.2.1 Sources for Non-government documents

ASTM TEST METHODS: (Application for copies should be addressed to American Society for Testing and Materials, 100 Barr Harbor, West Conshohocken, PA 19428-2959)

AATCC TEST METHODS: (Application for copies should be addressed to American Association of Textile Chemists and Colorists, P. O. Box, 12215, Triangle Park, NC 27709-2215)

MILITARY INTERESTS:

Custodian
Navy-NU

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

PREPARING ACTIVITY:
DLA-CT

Project number
8465-0148

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

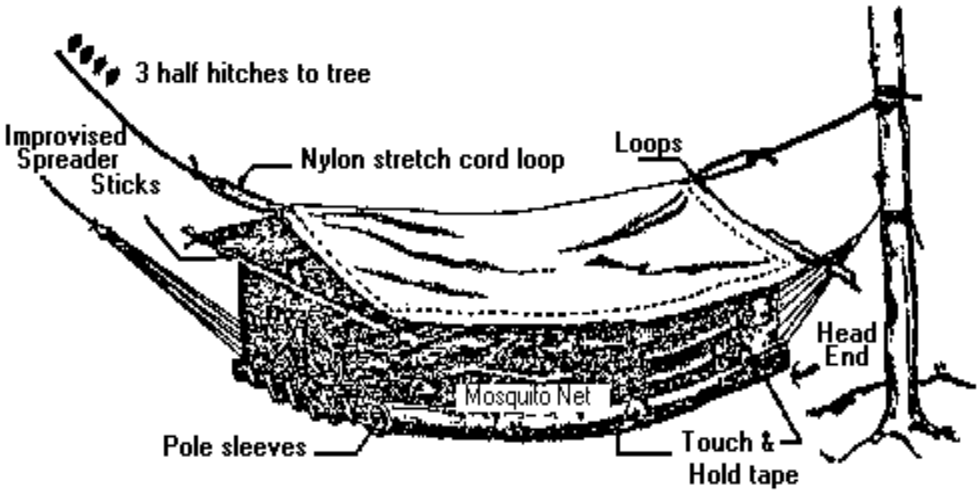

1. Hammock should be slung taut. Use complete turn of rope around tree and secure with 3 half hitches.

2. To get into hammock, spread open hammock bed and sit with weight in center of bed.

3. After entering hammock, seal vertical edges at head end and then bottom edges of mosquito net to hammock bed by means of touch and hold tape.

4. Where trees are not available, bed can be made by suspending hammock from a frame of poles. Slide poles through sleeve on each side of hammock bed and support on other poles at head and foot of hammock bed.

5. By using locally cut sticks and spare bridle string, hammock can be erected on ground as a tent shelter.

6. Hammock can be used as a litter by running a pole through pole sleeves.

FIGURE 1. HAMMOCK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.