INCH-POUND

A-A-55288
November 21, 1995

COMMERCIAL ITEM DESCRIPTION

SMOCK, MEDICAL ASSISTANT'S, MAN'S, WHITE, COTTON-POLYESTER, DURABLE PRESS

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-S-37951for all Federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description covers the requirements for a durable press, cotton-polyester, white smock for wear by medical assistants in a clinical environment. It can be worn either inside or outside of the trousers.

2. CLASSIFICATION. The smock shall be furnished in the following sizes:

Small Medium Large Extra Large

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNSC, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:45Z
Check the source to verify that this is the currentversion before use.

3. SALIENT CHARACTERISTICS

3.1 Description. The smock shall have a notched lapel collar, button down front closure with five 18-line buttons and vertical buttonholes, left side breast patch pocket, short sleeves, and a plain back. The smock shall have topstitched hems at the sleeve bottoms, top of pocket, and bottom hem. The inside seam allowance at the bottom of the sleeve hem and the ends of pocket openings shall be reinforced with 3/8 to 5/8 inch vertical bartacks.

3.2 Material.

3.2.1 Basic material. The basic material shall be a poplin, 65 (+ 3) percent polyester with the remainder cotton. The weight shall be a minimum of 4.8 ounces per square yard when tested in accordance with ASTM D-3776, Option C when finished, and treated with a durable press treatment. The color shall be a non-yellowing, bleached white. Whiteness may be supplemented by an optical brightener which fluoresces in the blue region. The yarns per inch of the finished cloth shall be a minimum of 100 in the warp direction and 52 in the filling direction when tested in accordance with ASTM D-3775. The breaking strength of the finished cloth shall be 130 pounds minimum in the warp direction and 80 pounds minimum in the filling direction when tested in accordance with ASTM D-5034. The finished cloth shall not shrink more than 3.0 percent in the warp direction and 2.0 percent in the filling direction when tested in accordance with AATCC 135 using the permanent press wash/dry instructions. The finished cloth shall have a minimum appearance rating of 3.0 when tested in accordance with AATCC 124 using permanent press machine cycles and wash temperature V. The pH value of the water extract of the cured cloth shall be no less than 5.0 nor more than 9.0 when tested in accordance with Test Method 2811 of FED-STD-191. The minimum tear strength of the finished cloth shall be 5.0 lbs. in the warp direction and 3.5 lbs. in the filling direction when tested in accordance with ASTM D-1424.

3.2.2 Thread. The thread shall be white, cotton-covered polyester or spun polyester, Ticket No. 50 or 70, conforming to Type I of A-A-50199.

3.2.3 Buttons and buttonholes. The buttons shall be size 18-line, 4-hole, pearlescent white, sewn securely to the right front to correspond with the buttonholes. The buttonholes shall be vertical straight-cut, purl, or whip type with the material securely caught in the stitching. The buttonholes shall be placed on the left front of the smock, through the facing, 3/4 + 1/8 inch from the edge. The ends shall be tacked, and the buttonholes shall be cut so that they fit securely over the buttons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.3 Labels. Each smock shall have a combination size and identification label, and a care instruction label sewn inside the collar joining seam. As an alternate, one label may be used containing the size, identification, and care instructions. Commercial-type labels may be used. The labels shall show good colorfastness to laundering. The care instructions are as follows:

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water (140°F) as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touching up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.4 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.5 Patterns. The Government shall furnish a complete set of patterns which provides for a 1/2 inch seam allowance for all seams except the collar seam which shall be 3/8 inch. The government patterns may be used to create the contractor's working patterns. However, the design of the patterns shall not be altered in any way. Commercial patterns may be used in lieu of government-furnished patterns. Minor modifications are permitted to accommodate automation. However, the design and measurements of the government-furnished patterns must be maintained for both working and commercial patterns.

3.6 Measurements. The finished smocks shall conform to the following measurements:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Measurements in inches

	Small	Medium	Large	X-Large	Tolerance
1/2 Chest 1/	21	23	25	27	± 1/2
Sleeve seam 2/	6-1/4	6-1/4	6-1/4	6-1/4	± 1/2
Back length 3/	30	30-1/2	31	31-1/2	± 1

1/ With the smock buttoned, measure across the chest, at base of armhole, from folded edge to folded edge.

2/ Measure sleeve seam along underarm from sleeve setting seam to the end of sleeve.

3/ Measure back length down center of back from collar joining seam to a point in line with bottom of smock.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Market acceptance criteria. The item offered, or a generic equivalent, must have been sold to the commercial market or to the Government for at least 2 years.

5.3 Visual examination. Each smock shall be examined for the defects listed below in accordance with ANSI/ASQC Z1.4.

5.3.1 Defects. Any hole, cut, or tear; any part shaded; any spot or stain (outside); raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; any material defects, distorted parts or poor workmanship; any component part omitted or defective; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order; any requirement omitted or not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:45Z
Check the source to verify that this is the current version before use.

5.4 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5092

7.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AATCC Test Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection of Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.)

MILITARY INTERESTS:

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review Activities:
Army - GL
Navy - NU
Air Force - 45

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project 8415-0039

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

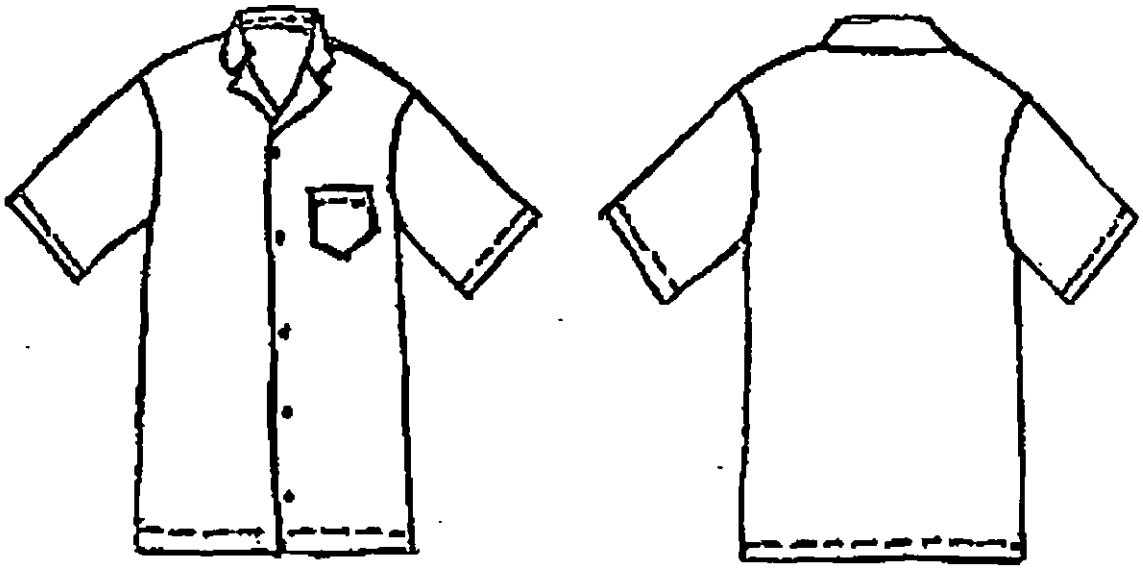


FIGURE 1. Smock, Medical Assistant's

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.