INCH-POUND

A-A-55294
April 21, 1994

COMMERCIAL ITEM DESCRIPTION

CAP, CAMOUFLAGE PATTERN

The General Services Administration has authorized the use of this commercial item description.

Abstract. This commercial item description covers the requirements for a visor style cap. The caps are intended for wear in hot weather environments by military personnel of the Department of the Army.

Salient characteristics. The cap shall be visor style, having a circular top crown, a one piece, self lined, side crown with a center back seam. The outside crown band shall be topstitched around the bottom of the side crown. The crown seam shall be reinforced with a bias cut strip of self fabric. The cap shall have six vents made by sewn eyelets uniformly positioned around the sides and back of the cap. Each eyelet shall contain 19 to 24 stitches with the gage of stitching not less than 1/16 inch and the eyelets shall have an inside diameter of 2/16 to 3/16 inch. The visor shall be quilted with six rows of parallel stitching and the inner edge of the visor interlining shall abut the bottom of the topstitched side crown band. The under visor cover shall overlap the top edge of the visor 1/4 inch. The cap shall be topstitched around the top of the side crown, the top and bottom of the under visor cover, and along the center back seam.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

All seams and stitching shall be 10-14 stitches per inch except the stitching through the visor and the stitches for seaming the visor cover, together along the inner edge of the visor's interlining (not through the interlining), shall be 6-8 stitches per inch. The gage of stitching for all topstitching shall be 1/8 - 3/16 inch. The cap sizes shall range from 6-3/8 to 7-3/4.

Materials. The cap shall be made of a ripstop nylon/cotton blend conforming to the requirements of class 1 of MIL-C-44436.

The thread shall conform to Type I of A-A-50199, ticket numbers 50 and 70 (ticket no. 30 can be used for quilting the visor), except that colorfastness to laundering and light only shall apply. The thread shall be dyed Olive Drab S-1, C.A. 66022 of Standard Shades for Sewing Threads

The visor interlining shall be a plastic high density polyethylene material weighing 10.25 to 13.5 grams per visor, having a thickness of 0.082 to 0.089 inch and 35.0 percent to 60.0 percent of stiffness when tested in accordance with ASTM D 747.

The inside of the center front of the cap shall be stabilized with a square cut piece of natural white, nonwoven interlining made from 100 percent polyester staple fibers or from a blend of staple nylon and staple rayon fibers or a blend of polyester, nylon and rayon staple bound with a latex acrylic binder. The interlining shall weigh a minimum of 5.6 ounce per square yard when tested in accordance with ASTM-D 1117 Section 17. The contractor shall submit a certificate of compliance to ensure fiber content requirement has been met. The stabilizer shall be cut 3 inches wide and the length shall extend from the top crown joining seam to the visor joining seam and shall have a minimum breaking strength of 100 pounds in the machine direction and 80 pounds in the cross-machine direction when tested in accordance with ASTM-D 1117, Section 7.

Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

Labels. The labels shall be nonwoven, Green shade, with black legible marking and shall show colorfastness to laundering, having a minimum rating of "4" when tested in accordance with AATCC 61, Test No. IVA. The label shall be centered inside the back of the cap and sewn to lining on all four sides and shall not interfere with the vents. The label shall contain the information in the following format:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

CAP, CAMOUFLAGE PATTERN
Contract number
National stock number
Fur, Wool or Fiber Products Act information as applicable
Contractors name

SIZE

1. If cap is worn under helmet, helmet head band may require readjustment for proper fit and comfort.
2. Machine Wash. Use permanent press cycle. Wash in warm water with mild detergent.
3. Hand Wash. Hand wash in warm water using mild detergent. DO NOT WRING OR TWIST, Rinse in clean warm water.
4. DO NOT USE CHLORINE BLEACH OR STARCH.
5. Dry at low heat (Do not exceed 130 F).
DO NOT REMOVE THIS LABEL

Sizes and measurements. The finished caps shall conform to the measurements for each respective size, as shown in the table below.

Cap sizes (inches)

Size	Inside cap circumference (± 1/4 inch tolerance)
6-3/8	20-1/8
6-1/2	20-1/2
6-5/8	20-7/8
6-3/4	21-1/4
6-7/8	21-5/8
7	22
7-1/8	22-3/8
7-1/4	22-3/4
7-3/8	23-1/8
7-1/2	23-1/2
7-5/8	23-7/8
7-3/4	24-1/4

Cap measurements (inches)

	A 3-5/8	B 1-1/4	C 3-1/2	D 2-5/8	E 2-1/4
Tolerance	+ 1/4	+ 1/8	+ 1/4	+ 1/4	+ 1/8

NOTE: Reference Figure 1 for A, B, C, D, and E measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Patterns. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. Commercial patterns may be used in lieu of the Government-furnished pattern provided they conform to the cited design and finished measurements.

Workmanship. The finished cap shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the contractor's own quality assurance standards and the quality assurance standards defined by the technical data in the bid package.

Product demonstration model. When required, offerers shall submit samples of their intended production. The product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the commercial item description specified above.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

Visual examination. The caps shall be examined for the defects listed below.

Defects. The cap shall be examined for the following defects: any hole, cut, tear, spot, or stain, visible mend, thread ends not removed, component part omitted, misplaced, or not as required; component part puckered, wrinkled, pleated, or fullness affecting appearance, misshaped or distorted, part of material caught in unrelated operation or stitching; not neatly seamed, back seam off centered, skipped stitches or runoff stitches, ends of stitching not secured, loose or tight tension, thread breaks;

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Defects. Visor off centered or construction not formed evenly; visor interlining caught in visor to cap joining seam; vents located more than 1-1/4 inches below side crown piece and crown joining seam; vents do not align; side crown lining and outer fabric not aligned when vents are sewn; top ends of side crown band not evenly matched in back closing seam; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

Source of non-Government documents

ASTM-D Test Methods:

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Methods:

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

Standard Shades for Sewing Thread:

(Applications for copies should be addressed to the Color Association of the United States, 409 W 44th St., New York, NY 10036.)

Custodian:
Army - GL

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8415-0959

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

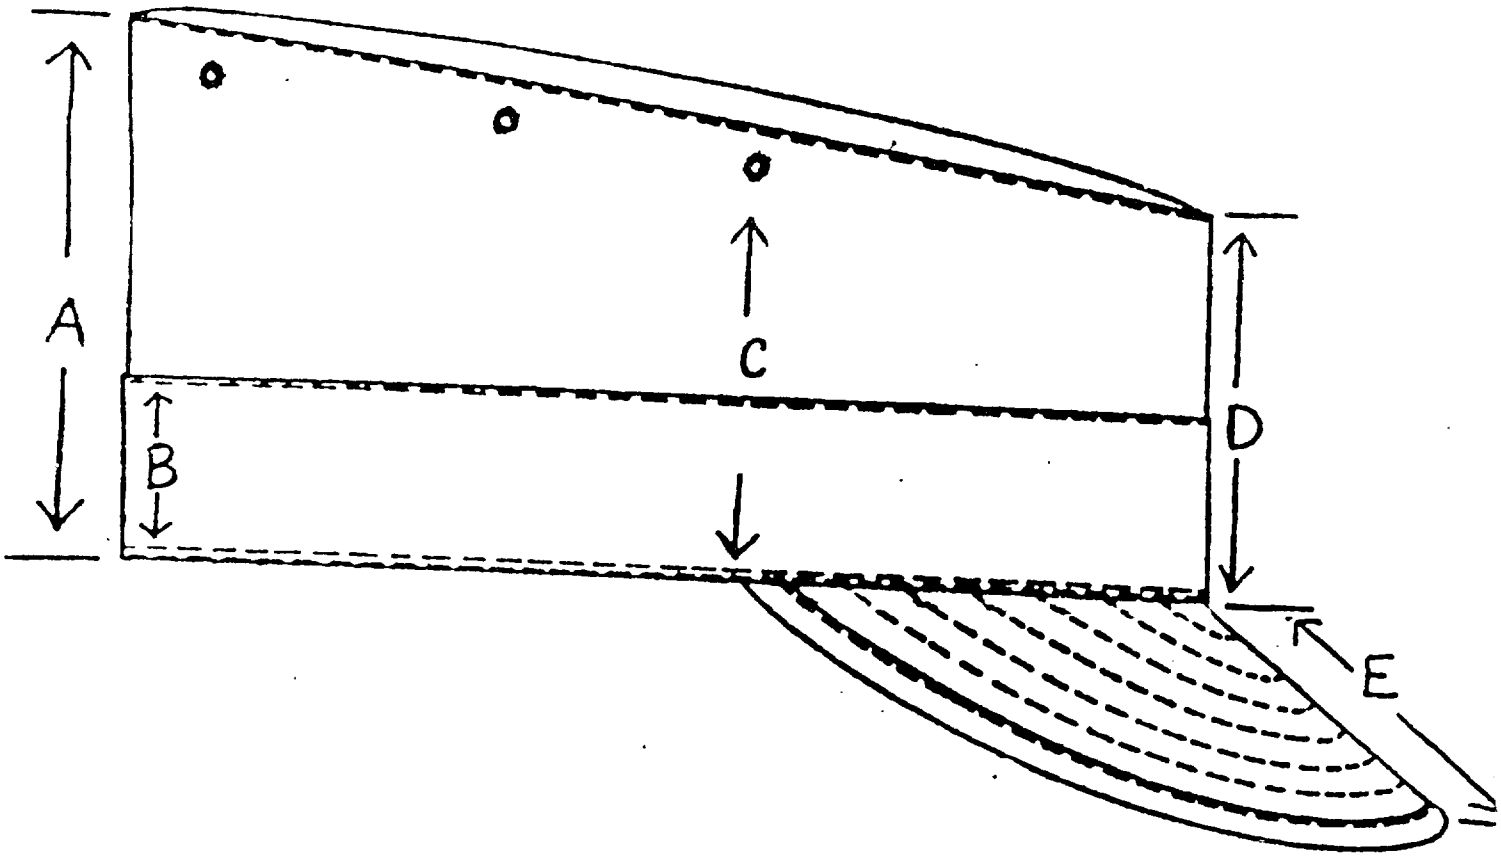


FIGURE 1 - CAP, CAMOUFLAGE PATTERN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revisio letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification c requirements on current contracts. Comments submitted on this form do not constitute or imply authorization t waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55294	94-04-21

3. DOCUMENT TITLE

CAP, CAMOUFLAGE PATTERN

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial (215) 737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-Jun-28 10:45:52
Check the source to verify that this is the current version before use.