INCH-POUND
A-A-55304
February 5, 1997

COMMERCIAL ITEM DESCRIPTION

SKIRT, WOMAN'S DRESS, POLYESTER/WOOL

The General Service Administration has authorized the use of this Commercial item description as a replacement for MIL-S-44102 for all Federal agencies.

1. SCOPE. This Commercial Item Description covers the requirements for a polyester/wool serge dress skirt. The skirt is intended to be worn by female personnel of the Department of Defense as part of the Army's Dress uniform.

2. CLASSIFICATION. The skirt shall be of one type in the following sizes:

SCHEDULE OF SIZES

JUNIORS		
PETITE (P)	**REGULAR (R)**	**TALL (T)**
10	10	10
12	12	12
14	14	14
16	16	16

Beneficial comments, recommendation, additions, deletions, clarification's, etc. and any data which may improve this document should be sent to : Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A **FSC 8410**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

MISSES		
PETITE (P)	**REGULAR (R)**	**TALL (T)**
4	4	
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
	18	18
	20	
	22	
	24	
	26	
WOMEN'S		
PETITE (P)	**REGULAR (R)**	**TALL (T)**
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
	18	18
	20	

3. SALIENT CHARACTERISTICS

3.1 Description

3.1.1 Skirt. The skirt is a dress type with a one-piece set-on waistband with both ends to button at center back opening, a rubberized track on inside of the waistband, a back slide fastener with edge stitching along back seam the length of the slide fastener only, two front and two back darts, a waistband pocket on right front, a back open pleat finishing right over left, a free hanging full lining attached to the skirt at waistband with an inverted pleat in the lining, and an unhemmed bottom. All exposed edges and the bottom of skirt shall be overedge stitched.

3.1.2 Waistband and back opening. The one piece waistband shall finish 1-1/4 ± 1/8 inches in width with a lock stitch immediately below the waist seam, through the skirt and waistband lining. The back opening shall have buttonholes placed as indicated on patterns, corresponding to buttons on the waistband and a slide fastener. The buttonholes shall be eyelet end, cut after, taper-bar type worked over gimp with the end securely tacked. The finished cut length of the buttonhole shall be 3/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3.1.3 Pocket. The pocket shall be centered over the right dart (when worn).The right front waistband pocket shall measure 3-3/4 ± 1/8 inches at the opening for all sizes. The front of the pocket opening shall be topstitched 3/16 to 1/4 inch from the edge. The waistband pocket shell shall be of basic material and the waistband pocket lining shall be of lining material.

3.2 Material

3.2.1 Basic material. The basic material for the skirt shall be a 55 percent polyester/45 percent wool serge cloth, conforming to type III, class 3 of MIL-C-823. The color shall match Army Green 489.

3.2.2 Lining. The material for the skirt lining and pocket lining shall be a polyester twill conforming to class 3 of A-A-52106. The color shall approximate Army Green 468.

3.2.3 Waistband lining. The material for the waistband lining (See 3.2.6.1) shall be 100% polyester, polyester and cotton or polyester and rayon twill, dyed black, conforming to Class 1 of A-A-52106.

3.2.4 Waistband stabilizer. The material for the waistband stabilizer shall be black, bleached or unbleached cotton buckram conforming to type II of A-A-50186.

3.2.5 Waistband interlining material. The material for the waistband interlining shall be a fusible interlining conforming to type V, class 1, style B of MIL-C-44296.

3.2.6 Rubberized waistband lining. The material for the rubberized waistband shall consist of two rows of rubber material woven into a base of 100 percent polyester webbing. Each row of rubber shall consist of four ends of bare, square cut, low modulus, heat resistant, neoprene based rubber compound yarns. The two rows of woven rubber yarns shall be 3/8 inch (nominal) distance apart. The finished waistband material shall be white in shade, 7/8 ± 1/16 inch wide with selvage, non-fraying edges. The finished waistband shall not exceed 2.0 percent dimensional stability, and shall show no evidence of flaking decomposition, cracking or increased stiffness when tested for resistance to dry heat, steam pressing , and perchloroethylene solvent as specified in 3.2.6.2.

3.2.6.1 Rubberized waistband lining construction. The waistband lining may be a commercial type using lining, stabilizer, rubberized inside track and waistband materials specified. If a commercial type rubberized waistband lining is not used, the contractor may manufacture one as follows: Overlap the lining 1/4 inch on the rubber track material, position the lining 1/8 inch from each rubber track and stitch 1/16 inch from edge of lining. Overlap the lining on the interlining 1 inch and stitch 1/8 to 3/16 inch from edge of lining. Position waistband stabilizer to opposite remaining edge of interlining and stitch 1/2 inch from edge. Fold lining over interlining and press. The waistband stabilizer may be inserted during the joining of the waistband and waistband lining. The waistband lining shall be cut on the bias. The total width of the rubberized waistband lining shall measure 1-1/2 ± 1/8 inches in width in the finished skirt. The waistband lining may be pieced providing there is no more than one

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

piecing on each skirt. The one-piece rubberized waistband lining shall be stitched to the top edge of the waistband. Fold waistband lining to the inside and press top edge. The lining shall not be exposed beyond the top of waistband.

3.2.6.2 Waistband resistance testing. The skirt shall have a minimum rating of "good" when evaluated for waistband resistance to dry heat (after 3 exposures) in accordance with Test Method 5642 of FED-STD-191 Textile Test Methods. Test shall be performed at a maximum of 400 degrees F using steam pressing. The waistband lining shall be wet with water and steam pressed at a temperature of 240 to 250 degrees F for one minute. The lining shall then be allowed to reach room temperature and without rewetting, steam pressed again for one minute. Repeat the process two more times and visually check for degradation after each exposure, and perchloroethylene solvent (after 3 exposures) in accordance with Test Method 5621 of FED-STD-191.

3.2.7 Slide fastener. The slide fastener shall be polyester or nylon continuous monofilament chain, or a single length slide fastener may be used for all skirt sizes. The slide fastener shall have an automatic lock slider, top stop, staple bottom stop, 7/16 or 9/16 inch width tape. The color of the tape shall be Green, Cable No. 66524, and shall show "good" colorfastness to wet/drycleaning when tested in accordance with AATCC 132.

3.2.8 Buttons. The buttons for the back closure shall be melamine composition, 24 line with 4 sewing holes, type II, class D, style 20 or 21 of V-B-871. The color of the buttons shall match Army Green BR, Cable No. 62015.

3.2.9 Thread. The thread used for stitching and seaming shall be cotton or polyester covered polyester core, 2 ply, 36-45 tex, and for overedge stitching shall be a 2 ply, 31-35 tex, dyed Green E, C.A. 66034, conforming to A-A-50199. As an alternate, cotton thread dyed Green E, C.A. 66034, conforming to type I of A-A-52094 may be used.

3.2.10 Gimp. The gimp for reinforcing the buttonholes shall be cotton, size Number 8, matching shade AG 489, conforming to type I or II of A-A-50198.

3.2.11 Labels

3.2.11.1 Combination label. Each skirt shall have a white, nonwoven, acrylic coated, commercial type label which shall be sewn into the waistband. The inscription shall show "good" colorfastness to wet drycleaning, when tested in accordance with AATCC 132, and shall contain the following information:

NAME: SKIRT, WOMAN'S DRESS, POLYESTER/WOOL
FIBER CONTENT: 55% polyester/45% wool (Example)
STOCK NUMBER: 8410-00-000-0000 (Example)
NAME OF CONTRACTOR/MANUFACTURER
DRY CLEAN ONLY
Press/iron temperature with steam 325 ± 6 degrees F or wool setting with steam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3.2.11.2 Size labels. Each skirt shall have a white, nonwoven, acrylic coated, commercial type size label which shall be stitched into the inside of waistband on right back side of skirt (when worn). The body measurements printed on the label shall be in accordance with Tables I and II. The inscription shall show "good" colorfastness to wet dry-cleaning, when tested in accordance with AATCC 132, and shall contain the following information:

28/38-1/2 (Example)
(Size 10MT) (Example)
HEIGHT: More than 67 inches (Example)
CONTRACT NO:

NOTE: The first line of the label is the body measurements (waist/hip), the second line is the size designation, the third is the height and the fourth is the contract number.

TABLE I. Body measurements

SIZE CODE	WAIST CIRCUMFERENCE (INCHES)	HIP CIRCUMFERENCE (INCHES)
4	24-1/2	35
6	25-1/2	36
6W	25-1/2	38
8	26-1/2	37
8W	26-1/2	39
10J	28	36-1/2
10	28	38-1/2
10W	28	40-1/2
12J	29-1/2	38
12	29-1/2	40
12W	29-1/2	42
14J	31	39-1/2
14	31	41-1/2
14W	31	43-1/2
16J	33	41-1/2
16	33	43-1/2
16W	33	45-1/2
18	35	45-1/2
18W	35	47-1/2
20	37	47-1/2
20W	37	49-1/2
22	39	49-1/2
24	41	51-1/2
26	43	53-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

TABLE II. Height ranges

Less than 63-1/2 inches	63-1/2 to 67 inches	More than 67 inches
Petite	Regular	Tall

3.2.11.3 Label/tag. Each skirt shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each skirt by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the skirt when it is folded and/or packaged as specified and so that it causes no damage to the skirt.

3.3 Figure. The figure is furnished for information only. To the extent of any inconsistencies between the written specification and the figure, the specification shall control.

3.4 Patterns. The government shall furnish a complete set of patterns which provides for a 1 inch seam allowance for joining all seams, except a 3/8 inch seam allowance is provided for attaching the waistband. The government patterns may be used to create the contractor's working patterns. Minor modifications are permitted to accommodate manufacturing procedures, however, the design and finished measurements must be maintained. The contractor may use his own commercial patterns provided they conform to the required design and finished measurements specified herein.

3.5 List of pattern parts. The following pattern parts listed in Table III are provided to insure the pattern set is complete.

TABLE III. List of pattern parts

MATERIAL	NOMENCLATURE	ABBREVIATIONS	CUT PARTS
Basic material	Front	FRONT	1
	Back	BACK	2
	Front pocket shell	FRT_PKT_SHLL	1
	Waistband	WAISTBAND	1
	Zipper placket (optional)	ZPPR_PLACKET	1
Interlining material	Waistband interlining	WSTBAND_INT	1
Lining material	Front	FRONT_LIN	1
	Back	BACK_LIN	2
	Front pocket lining	FRT_PKT_LIN	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3.6 Dimensions. The finished unhemmed skirts shall conform to the measurements in Table IV.

Table IV. Finished measurements

	WAIST 1/	HIP 2/			LENGTH 3/		
SIZE		JUNIOR	MISSES	WOMEN	PETITE	REGULAR	TALL
4	24-1/2		37-1/2	39-1/2	25-5/8	27-5/8	29-5/8
6	25-1/2		38-1/2	40-1/2	25-3/4	27-3/4	29-3/4
8	26-1/2		39-1/2	41-1/2	25-7/8	27-7/8	29-7/8
10	28	39	41	43	26	28	30
12	29-1/2	40-1/2	42-1/2	44-1/2	26-1/8	28-1/8	30-1/8
14	31	42	44	46	26-1/4	28-1/4	30-1/4
16	33	44	46	48	26-3/8	28-3/8	30-3/8
18	35		48	50	26-1/2	28-1/2	30-1/2
20	37		50	52	26-5/8	28-5/8	30-5/8
22	39		52			28-3/4	
24	41		54			28-7/8	
26	43		56			29	
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

1/ Waist. Twice the measurement taken from folded edge to folded edge across center of waistband with the slide fastener closed and the waistband buttoned.

2/ Hip. Twice the measurement taken from folded edge to folded edge of skirt 7 inches down from bottom edge of waistband.

3/ Length. Measure from bottom edge of waistband at center front to bottom edge.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR) to the maximum extent practicable.

5. QUALITY ASSURANCE PROVISIONS

5.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract or purchase order.

5.2 Market acceptance criteria. The item offered, or a similar item, must have been sold to the Government or commercial market.

5.3 Visual examination. Each skirt shall be examined for the defects listed below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

Component part omitted, not as specified, not cut as specified, distorted, full, tight, or twisted, any part of skirt caught in any unrelated row of stitching; Waistband: fullness, pleats, gathers or twists on waistband or top of skirt, lining exposed on outside, finished width not as specified, rubberized track not as specified; Back opening at waistband: length of back closure uneven at top; Back vent: not as specified, any bulging, puckering or distortion; Pocket: pocket out of alignment from waistband, notch exposed at pocket opening, facing not caught in topstitching at end of opening; Hole, cut, tear, smash, burn, drill hole, run, thin place, dye streak, color not as specified, misweave, knot or slub; Any finished measurement not as specified; Seam: puckered, distorted, pleated, wavy, twisted, irregular or open, loose or tight stitch tension, broken or missing thread or stitch, needle chew, visible mend, edge or raised stitching sewn too close to edge, resulting in damage to cloth, seam allowance not as specified, raw edge; Lining not securely caught in fabric, not as specified, or positioned so as to cause a bulge; Darts missing, puckered, distorted, misplaced or positioned so as to cause a bulge; Buttonhole missing, not as specified, not securely caught at waistband, misplaced or positioned so as to cause a bulge; Inverted pleat: not as specified, positioned so as to cause a bulge, any puckering or distortion; Button misplaced, missing or broken, or positioned so as to cause a bulge or misaligned waistband; Slide fastener does not mesh properly, slider binds, catches, sticks or disengages from coils, fastener not the type, style, or size specified; Shade variation within a part or between parts; Thread, button, or lining color not as specified; Spot, stain, thread ends not trimmed or removed; Rancid odor; Label: Omitted, incorrect, illegible, misplaced, not attached as specified, or stitched through printing; bar-codes not scannable or readable by scanner, human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged skirt; bar code causes damage to the skirt; any skirt not packaged in accordance with the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Sources of Government documents. Copies of military and Federal documents are available from:

Department of the Navy
Defense Printing Service
Detachment Office
700 Robbins Avenue, BLDG. 4D
Philadelphia, PA 19111-5093

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

Rules and Regulations Under the Textile Fiber Products Identification Act-Applications for copies may be addressed to:

Federal Trade Commission
Washington, DC 20580

7.2 Sources of non-Government documents.

AATCC Test Methods - Applications for copies should be addressed to:

American Association of Textiles Chemists and Colorists
P.O. Box 12215
Triangle Park, NC 27709-2215

MILITARY INTEREST:

Custodian:
Army-GL

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
DLA-CT

Project No. 8410-0359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

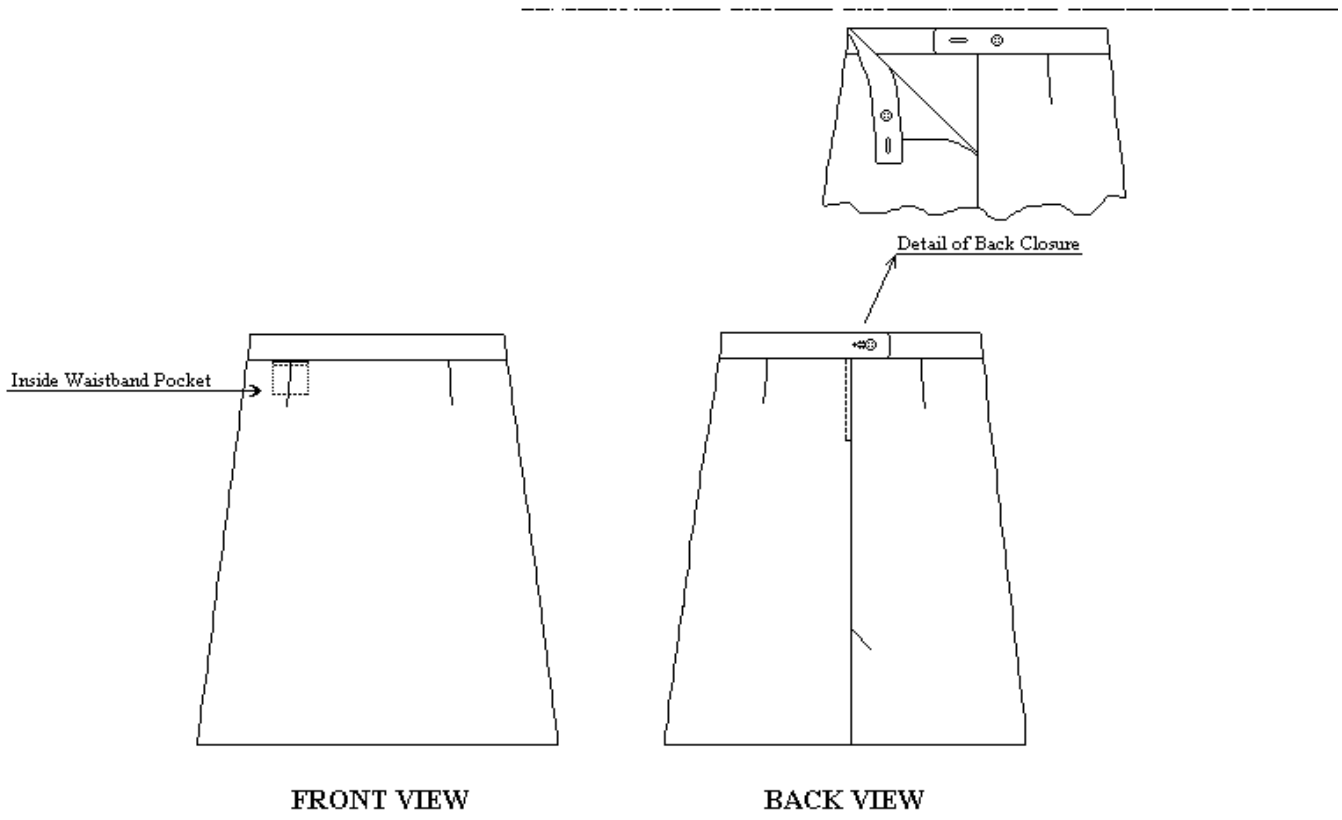

FIGURE 1. Skirt, Woman's Dress, Polyester/Wool

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.