INCH-POUND
A-A-55309
June 03, 1997

COMMERCIAL ITEM DESCRIPTION

SWEATSHIRT, PHYSICAL FITNESS UNIFORM

The General Services Administration has authorized the use of this commercial item description in preference to MIL-S-44212.

1. SCOPE. This commercial item description covers one type of a knitted jersey fleece sweatshirt. The sweatshirts are intended for use as a component of the Physical Fitness Uniform by personnel of the Department of Defense.

2. SALIENT CHARACTERISTICS

2.1 Description. The sweatshirt shall be hooded, long sleeve, and have a front slide fastener closure. The hood shall be of double thickness with eyelet's and drawcord, the body includes split muff pockets (double thickness) and rib knit side panels (3-1/2 inches wide). The cuffs and waist shall be rib knit finished.

2.2 Materials.

2.2.1 Basic material. The cloth for the body, hood, sleeves and muff pockets of the sweatshirt shall be a jersey knit fleece cloth consisting of 55 (+/-5)% cotton for comfort and absorbency, 1-2% rayon or polyester and the remaining percentage acrylic fiber or a blend of fibers with comparable properties. The cloth for the cuffs, waist, and side panels shall be plaited 1x1 rib knit consisting of 47 (+/-5)% cotton, 2-3% rayon or polyester and the remaining percentage acrylic fiber or a fiber with comparable properties. The color shall be light Heather Gray 446. Testing shall be in accordance with Table I. The sweatshirt shall be cut in the wale direction.

2.2.2 Thread. The thread for seaming and stitching shall be 2-ply cotton-covered polyester or spun polyester. The color shall be light gray, DoD shade AX, C.A. 66064 and shall show colorfastness to laundering, perspiration and light. Testing shall be in accordance with Table I.

2.2.3 Drawcord. The drawcord for the hood shall be 3/16 inch diameter, 100 percent filament nylon or a fiber with comparable properties having a minimum breaking strength of 150 pounds. The color shall be light gray, Dod shade AX, C.A. 66064 and shall show colorfastness to laundering. Testing shall be in accordance with Table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn.: DPSC-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A **FSC 8415**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

2.2.4 Eyelet. The eyelet for the waist drawcord shall be one piece, brass with a natural finish and a inside diameter large enough to allow the drawcord to pass easily through.

2.2.5 Slide fastener. The slide fastener shall be a separating, nonreversible, open automatic lock, with a right hand separating unit bottom stop. The slide fastener shall be plastic, size MS with a long pull tab. The tape width shall be 9/16 (+/-1/32) inch wide. The color, including chain, tape and slider shall match the basic material.

2.3 Preshrinking. The knitted cloth shall be preshrunk before being cut, such that the sweatshirts will meet all shrinkage requirements specified in Table I.

2.4 Figures. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the written commercial item description and Figures 1 and 2, the written commercial item description shall govern.

TABLE I. - Requirements

	REQUIREMENTS		
CHARACTERISTICS	**MINIMUM**	**MAXIMUM**	**TEST METHOD**
WEIGHT OZ./SQ. YD.:			ASTM D3776
Jersey knit fleece	8.5 (+/-0.5)	_____	
Rib knit	8.5 (+/-0.5)	_____	
CONSTRUCTION:			ASTM D3887
Jersey Knit Fleece:			
Wales per inch	19	_____	
Courses per inch	25	_____	
Rib Knit:			
Wales per inch	18	_____	
Courses per inch	25	_____	
BURSTING STRENGTH (lbs)			ASTM D3787
Jersey knit fleece	75	_____	
Rib knit	90	_____	
DIMENSIONAL STABILITY	1/ AND 2/		AATCC-135
COLORFASTNESS (MIN.)			
Jersey and rib knit			AATCC-61, TM 3A
Laundering:	"4"		AATCC-16. Option
Light:	"4"		A
Perspiration:	"4"		AATCC-15
Crocking	3.5	_____	AATCC-8
pH			FED-STD-2811
Jersey and rib knit	5.0	8.5	
BREAKING STRENGTH			ASTM D2256
(LBS)	1.8	_____	
Thread	150	_____	
Drawcord			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

TABLE I. - Requirements (continued)

CHARACTERISTICS	REQUIREMENTS MINIMUM	REQUIREMENTS MAXIMUM	TEST METHOD
FIBER IDENTIFICATION			ASTM D276 or AATCC-20
Cotton:			
Jersey knit fleece	55 (+/-5)%		
1x1 rib knit	47 (+/-5)%		
Rayon or polyester or equivalent	1 to 2%		
Acrylic or equivalent	Remaining percentage		

1/ The finished sweatshirts, after five (5) launderings and dryings shall not elongate more than 5.5 percent or shrink more than 8.0 percent lot average, with no sample unit to exceed 10.0 percent for the outseam and shall not shrink more than 10.0 percent for the sleeve length, body length and chest width.

2/ The sweatshirts shall be tested for shrinkage by using normal machine cycle 120°(+/-5°F) washing temperature, and dryer setting 140°F. The sweatshirts shall not be moistened or pressed before measuring. Measurements shall be taken to the nearest 0.1 inch with the sweatshirts laid flat. Elongation shall be reported with a minus (-) sign.

2.5 Finished measurements. The sweatshirts shall be provided in the following measurements:

TABLE II. - Finished measurements (in inches)

	X-Small	Small	Medium	Large	X-Large	Tolerances
(A) 1/2 Chest width	19-1/2	21-1/2	23-1/2	25-1/2	27-1/2	+1,-1/2
(B) Length	24	25	26	27	28	+/-3/4
(C) Armhole	9-1/2	10	10-1/2	11	11-1/2	+/-3/8
(D) Sleeve overarm	24-1/4	25-1/4	26-1/4	27-1/4	28-1/4	+/-1/2
(E) Sleeve underarm	20-3/4	21-3/4	22-3/4	23-1/4	23-3/4	+/-3/4
(F) Sleeve opening	5-1/2	5-1/2	6	6	6-1/2	+/-3/8
(G) Neck opening relaxed	10	10-1/2	10-1/2	11	11	+/-3/8
(H) Sleeve trim	3	3	3	3	3	+/-1/4
(I) Bottom trim	3	3	3	3	3	+/-1/4
(J) Side panel width	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2	+/-1/4
(K) Hood width	10-1/2	11	11	11-1/2	11-1/2	+/-1/2
(L) Hood length	13-1/2	14	14	14-1/2	14-1/2	+/-1/2
(M) Pocket width	6-3/4	6-3/4	6-3/4	6-3/4	6-3/4	+/-1/2
(N) Pocket length	*-3/4	8-3/4	8-3/4	8-3/4	8-3/4	+/-1/2

(A) 1/2 Chest width: Measure just below armhole, flat across the chest.
(B) Length: Measure high point of shoulder to bottom including rib knit waist.
(C) Armhole: **M**easure shoulder seam point to underarm; (straight line, point to point).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

(D) Sleeve Overarm: Measure shoulder seam to sleeve, including rib knit cuff.
(E) Sleeve Underarm: Measure underarm seam to sleeve, including rib knit cuff.
(F) Sleeve Opening: Measure at cuff seam with rib extended until the body fabric lays flat.
(G) Neck Opening Relaxed: Fold center front to center back and measure seam.
(H) Sleeve Trim: Measure from seam to end of double thickness rib knit cloth.
(I) Bottom Trim: Measure from seam to end of double thickness rib knit cloth.
(J) Side Panel Width: Measure seam to seam of double thickness rib knit cloth.
(K) Hood Width: Lay flat, measure from fold to back seam.
(L) Hood Length: Layflat, measure top fold to neck seam in center of hood.
(M) Pocket Width: Measure center from fold at slide fastener to edge of pocket at widest point.
(N) Pocket Length: Measure from top edge of pocket to rib knit bottom hem.

2.6 Patterns. Government patterns shall be furnish upon request. Commercial patterns shall be used.

2.7. Labels/marking. A commercial type label shall include the contractor's name, contract number, size and National Stock Number (NSN). The commercial label shall include fiber and laundering information. Colorfastness to laundering shall apply. The commercial type label shall be attached to the inside of the sweatshirt. The care instructions shall read as follows.

CARE INSTRUCTIONS
Hand or machine wash in cold or warm water (maximum 120°F)
Do Not Bleach or Iron. Tumble Dry low setting (maximum 140°F)

2.7.1 Barcode label. The sweatshirts shall have a printed bar code label that is clearly legible and readable by scanner. The bar coding element shall be a 13 digit national stock number (NSN). The label shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified.

2.7.2 Marking. The ink for screen printing “ARMY” to the sweatshirt shall be black thermal plastic base ink (withstanding temperatures to 300°F) or equal. The black “ARMY” markings shall be screen printed on the front of the sweatshirt as shown in Figure 1. Letters shall measure 5/8 (+/-1/16) inch wide and 3 (+/-1/4) inches in height, see Figure 2. The overall width shall be 12 (+/- 1/4) inches and shall be positioned as specified in Table III. The printing shall have a rating of “4” after 15 launderings when tested as specified in AATCC-61.

TABLE III.- Marking location (in inches)

SIZE	DISTANCE DOWN FROM NECK SEAM +/- 1/2 INCH
X-SMALL	3
SMALL	3-1/2
MEDIUM	4
LARGE	4-1/2
X-LARGE	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3. Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own standards and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

4.2 Visual examination. The sweatshirts shall be examined for the following defects: Any hole, cut, or tear; any variation of shade; any spot or stain (outside), rancid odors, burns or scorch; raw edges, open seams, thread ends not removed, any material defects, distorted parts or poor workmanship; color not as specified; any component part omitted; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5. Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue, Bldg. 4D
Philadelphia, PA 19111-5094

6.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.
Department of Defense Standards Shades for Threads

(Applications for copies of color cards should be addressed to the Color Association of the U.S., 200 Madison Avenue, New York, NY 10016.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

6.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

MILITARY INTERESTS:

Custodians
Army - GL

Review Activities
Army - MD

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project 8415-0107

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

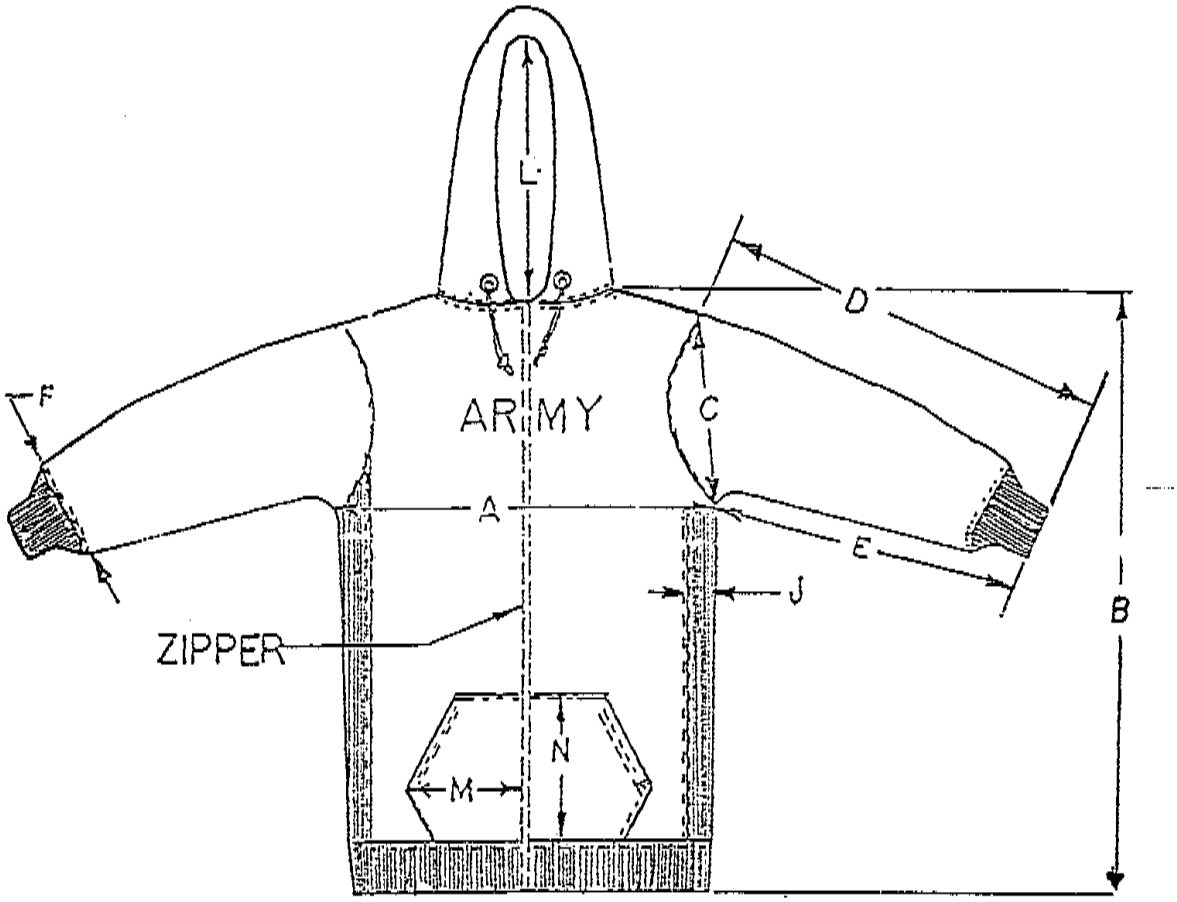

FIGURE 1. SWEATSHIRTS, PHYSICAL FITNESS UNIFORM (PFU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

FIGURE 2.

NOTE: The width of each letter shall be 5/8 (+/- 1/16) inch. The style of lettering shall be as shown above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.