INCH-POUND
A-A-55316
MARCH 2, 1998
SUPERSEDING
MIL-C-31003
4 JANUARY 1993

COMMERCIAL ITEM DESCRIPTION

COVERALLS, UTILITY

The General Services Administration has authorized the use of this commercial item description in preference to MIL-C-31003.

1. **SCOPE**. This commercial item description covers the requirements for a general purpose utility coverall for all the services.

2. **CLASSIFICATIONS**. The coveralls shall be of one type in the following sizes: XX-Small,
X-Small, Small, Medium, Large, X-Large, XX-Large.

3. **SALIENT CHARACTERISTICS**

3.1 Description. The coveralls shall have a slide fastener front closure with protective fly, shirt style collar, hanger loop with a 2 to 2-1/2 inch free opening, and elastic webbing in the back belt. The wrists and ankles shall have hook and pile fastener tape adjustments. The coveralls shall have two front patch pockets with hook and pile fastener tape and double piped pass throughs, two hip patch pockets with flaps and hook and pile fastener tape, and two breast pockets with flaps and hook and pile fastener tape. The left breast pocket flap shall have a pencil opening.

3.2 Stitching. All stitching shall be 10 to 14 stitches per inch. The collar shall be top stitched 3/16 to 1/4 inch from the edge. All edges shall be overedged or otherwise clean finished. Bartacking shall be 3/8 $\pm$ 1/16 inch long, and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching. Bartacks should be located in the following areas for reinforcement: left breast pocket for pencil opening, at corners of all pocket openings, at top of slide fastener on fly front and on bottom of slide fastener fly.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A **FSC 8415**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3.3 Materials

3.3.1 Basic material. The fibers shall be made from cotton or fibers with equivalent comparable properties which have been spun into singles yarn. The material for the coverall shall be a 5 harness sateen cloth for uniformity, color as specified in the contract or order. The use of dyes or substances containing elementary sulfur compounds capable of oxidation to sulfuric acid is prohibited. The contractor shall submit a certificate of compliance for this requirement. The filling effect side of the cloth shall be the face side. The material shall meet the following requirements:

TABLE I - PHYSICAL REQUIREMENTS

Test	Requirement	Test method
Weight Breaking strength (min)	8.0 to 9.0 oz per square yard 100 lbs warp direction 80 lbs filling direction	ASTM D3776-85 Opt C ASTM D5034-95
Dimensional change	2% max. in either warp and filling direction 1/ 2/	AATCC 96-1995 Opt 1C
Colorfastness to Laundering Light Crocking	 4 mininum 4 mininum 4 mininum	 AATCC 61-test 3A-1994 AATCC 16 Opt A-1993 3/ AATCC 8-1995

1/ Sample size shall be 22 by 22 inches with 18 inch benchmarks, 6 inches apart.

2/ Use Drying procedure (D) or samples may be dried using a thermostatically controlled circulating oven 221^0 -230^0 F until dried. The sample shall be allowed to cool for 5 minutes, sprinkled with water to permit damp pressing, and allowed to stand in this condition for 5 minutes. The dampened specimen shall be pressed with a flatbed press or a hand iron. Section 7.4 of AATCC 96 shall not apply.

3/ When a color change equal to Step 4 on the Gray scale is evident in either sample being evaluated or the standard sample, exposure shall be continued for an additional number of hours equal to the number of hours at which the color change is apparent. Specimens which do not show a color change until 80 AFU's shall be returned to the machine for a total exposure period not to exceed 140 hours.

3.3.2 Thread. The thread for seaming and stitching shall be cotton covered polyester core, 2 ply, ticket No. 50, or a commercially equivalent thread with a minimum breaking strength of 3.2 pounds or ticket no. 70 with a minimum breaking strength of 2.6 pounds when tested in accordance with ASTM-D-2256. The color shall approximate the shade of the basic material, and shall show colorfastness to crocking, laundering, perspiration and light equal to the requirements and test methods for the basic material in Table I.

3.3.3 Elastic webbing. The webbing shall be made with a heat resistant rubber thread. The 1-1/2 inches wide webbing shall have a thickness range of .03 - .06 inches and a maximum weight of 1.2 oz. per linear yard when tested in accordance with ASTM-D-3776, option D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

The drift of the load on the webbing, elongated and maintained at 50% elongation using a 4 to 7.5 pound weight for 4 hours, shall be not more than 20% (the webbing is elongated to 50% of its total elongation, held in that position for 4 hours and the amount of change is recorded). After the webbing has been elongated and maintained at 50% elongation for 10 minutes and then allowed to relax for 10 minutes, the webbing tension (change in length of the sample) shall be not more than 5%.

3.3.4 Slide fastener. The nonseparating, nonreversible, size 5-7 slide fastener without automatic pin or cam, shall be individual element molded plastic with a bridge top stop and bridge bottom stop. Pre-assembled or continuous chain application may be used. The color of the plastic components shall approximately match the basic material. The tape shall be 100% textured polyester. The length of the slide fastener shall fit the front opening shown on patterns. The color of the tape shall approximately match the basic material. The crosswise breaking strength of the chain shall be 110 pounds per minute when tested in accordance with ASTM D 2061. The fastener chain shall be tested for endurance meeting a minimum endurance of 1000 cycles when tested using a endurance testing machine such as a British Standard Reciprocator (BSR) or equal. The machine shall be set up with 3.5 lbs. lateral force and 3.1 lbs. longitudal force in accordance with ASTM D 2061.

3.4.2 Hook and pile fastener tape. The hook and pile fastener tape shall be a minimum of 1-inch wide, with a 6.5 mil nylon hook (220 denier) and nylon ground. The hook and pile tapes shall be stabilized as necessary to allow for maximum flatness and dimensional stability. The color of the hook and pile fastener tape shall approximately match the basic material. The fastener tape shall be stitched to the coverall according to the marks on the pattern 1/8 inch from the edge.

TABLE II. Physical Requirements

	Hook	**Pile**	
Weight (grams per linear yard)	5.6	7.4	ASTM D 3776
Breaking strength (minimum pounds)	115	95	ASTM D 5034
Shear strength	7.5	7.5	ASTM D 5034

3.4 Labels. A commercial-type printed cloth label shall contain the contractors name, contract number, size and national stock number, (NSN), fiber and laundering information including “OR USE NAVEDTRA 414-01-4581 Formula II: Hot formula without bleach (140^{O}F)”. The label shall be sewn on all four sides to the inside center back, below the collar.

3.4.1 Label/tag. A barcode label shall be attached to each item, and be clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified.

3.5 Patterns. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. However, a full set of patterns are

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

available upon request. Commercial patterns may be used in lieu of government furnished patterns provided that they conform to the cited design and finished measurements. The standard pattern provides a seam allowance of 1/2 inch for shoulder seams, sleeve setting, inseams, crotch seams, side seams, pockets and flaps, and 3/8 inch for all other seams.

3.6 Finished measurements. The finished coveralls shall conform to measurements as shown in Table I. The coveralls shall be measured laying flat and smooth, with the front slide fastener completely closed. Tolerance for all measurements shall be 1/2 inch.

TABLE III. FINISHED MEASUREMENTS (INCHES)

Size	XX-Small	X-Small	Small	Medium	Large	X-Large	XX-Large
1/2 Chest 1/	18-1/2	20-1/2	22-1/2	24-1/2	26-1/2	28-1/2	30-1/2
1/2 Waist 2/	15	17	19	21	23	25	27
Sleeve inseams 3/	23	23	23	23	23	23	23
Leg inseams 4/	32	32	32	32	32	32	32
Overall Length 5/	63-1/2	64-1/2	65-1/2	66-1/2	67-1/2	68-1/2	69-1/2

1/ Chest - Measurement taken across the front from base of armhole to base of armhole.
2/ Waist- Measurement taken across the waist from side seam to side seam in a relaxed position.
3/ Sleeve inseam -Measurement taken from the base of armhole along inseam to bottom of sleeve hem.
4/ Leg inseam - Measurement taken from crotch seam along inseam to bottom of leg hem.
5/ Overall length - Measurement taken from base of neck along center back to bottom of leg.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own standards, manufacturing methods and quality assurance practices, and be similar to products offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Visual examination. Each coveralls shall be examined for the defects listed below in accordance with ANSI/ASQC-Z1.4.

5.2.1 Defects. Any component not in accordance with specified requirements, any hole, cut, or tear; color not as specified; any outwardly visible part seriously shaded; spotted or stained (outside); raw edges, open seams, puckers, thread ends, or loose tension resulting in loose seams; any serious material defects, pockets out of alignment, distorted parts or other evidence of poor workmanship; any component part omitted; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner;

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. **PACKAGING**. The preservation, packing, and marking shall be as specified in the contract or order.

7. **NOTES**

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents

ASTM Manual - Applications for copies should be addressed to:
American Society for Testing materials
100 Barr Harbor Drive
Conshohocken, PA 19428-2959

ANSI/ASQC Z1/4 - Sampling Procedures and Table for Inspection by Attributes
American National Standards Institute
11 42nd Street
New York, NY 10036

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - NU
Air Force - 99

Civil Agency Coordinating Activity:
GSA-FSS

Review Activities:
Army - MD
Air Force - 11, 45
Coast Guard - CG
Navy - MC

Preparing Activity:
DLA - CT

Project No. 8415-0061

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

COVERALLS, UTILITY

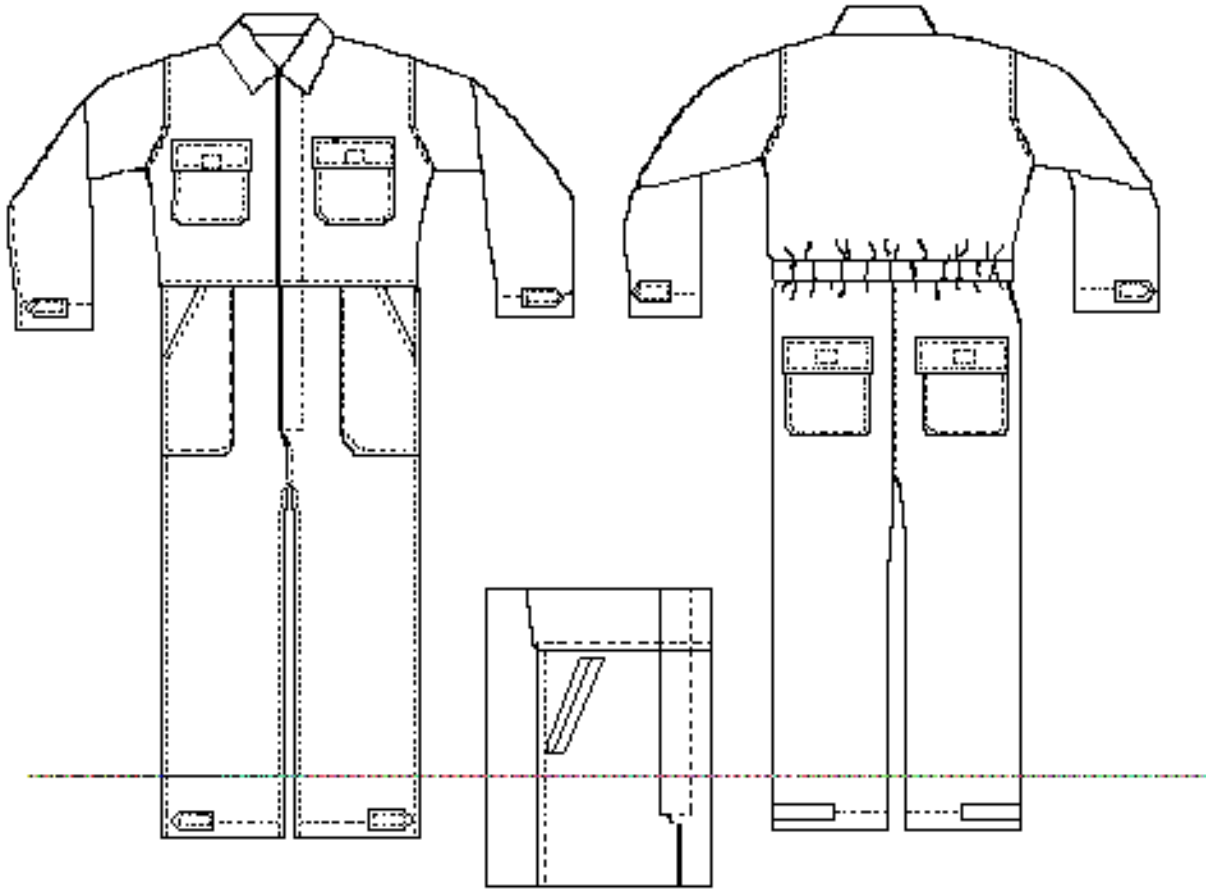

pass-throughs located

under front patch pockets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.