INCH-POUND
A-A-55316A
08 September 2020
SUPERSEDING
A-A-55316
02 March, 1998

COMMERCIAL ITEM DESCRIPTION

COVERALLS, UTILITY

The General Services Administration has authorized the use of this commercial item description (CID) by all Federal Agencies.

1. SCOPE. This commercial item description covers the requirements for a Type I general purpose utility coveralls for all the Services and Type II and Type III general purpose coveralls used by the Army.

2. CLASSIFICATION. The coveralls shall be of the following three (3) types and sizes:

2.1 Types.

Type I - Multi Service Design
Type II - Army Design - Foliage Green 504
Type III - Army Design - Tan 499

2.2 Sizes.

XX-Small
X-Small
Small
Medium
Large
X-Large
XX-Large

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The coveralls shall have slide fastener front closure with protective fly, shirt style collar, hanger loop with a 2 to 2-1/2 inch free opening, and elastic webbing in the back belt. The wrists and ankles shall have hook and loop fastener tape adjustments. The coveralls shall have two (2) front patch pockets with hook and loop fastener tape and double piped pass throughs, two (2) hip patch pockets with flaps and hook and loop fastener tape, and two (2) breast pockets with flaps and hook and loop fastener tape. The left breast pocket flap shall have a pencil opening. The Type II coveralls shall have two (2) pieces of 5-1/4 inches long by 1-inch wide loop fastener tape placed above pockets (as indicated on patterns) for placement of U.S. Army tape and nametape. The coveralls shall also have a piece of 2-inch by 2-inch loop tape placed on front flap (as indicated on patterns) for placement of rank, and a piece of 7-inch long by 4-inch wide loop tape on right and left sleeves (as indicated on patterns). Figure 1 is furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Materials.

3.2.1 Basic material. The cloth shall be made from cotton or fibers with equivalent comparable properties which have been spun into singles yarns. The cloth for the coverall shall be a 5-harness sateen weave. The filling effect side (also known as the back side) shall be used as the face side for this item. The cloth shall conform to the requirements specified in Table I.

3.2.2 Color. The color shall be as specified in the contract or purchase order for Type I and it shall be Foliage Green 504 for Type II and Tan 499 for Type III. The finished cloth shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced.

3.2.2.1 Visual shade matching. The color and appearance of the material shall match the standard sample when viewed using the AATCC EP9, Evaluation Procedure for Visual Assessment of Color Difference of Textiles, Option C (see 7.6), with sources simulating artificial daylight D_{75} illuminant with a color temperature of 7500 (± 200)K illumination of 100 (± 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2856 (± 200)K.

THIS SPACE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

TABLE I. Physical and colorfastness requirements.

Characteristic	Requirement	Test Method
Weight, oz./sq.yd.	8.0-9.0	ASTM D3776/D3776M, Opt. C
Breaking strength, pounds (min.) Warp Filling	 100 80	 ASTM D5034
Colorfastness: (min.) Laundering (3 cycles) (color change and staining) Lightfastness (after 80 AFU or 340 kJ/(m^2nm)@420 nm) 2/ Crocking (wet and dry)	 3-4 3-4 3.5	 AATCC TM61 Test 3A 1/ AATCC TM16.3 Opt 3 3/ AATCC TM8 4/
Dimensional change, percent (3 cycles) (max.) 5/ Warp Filling	 2 2	AATCC TM135 (1)(V)(Aiii)
Toxicity	3.7	3.7.1

1/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
2/ AFU: AATCC Fading Units.
3/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change.
4/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
5/ The dimensional change requirement refers to both shrinkage (-) and growth (+).

3.2.3 Labile sulfur. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The cloth shall be "Free" of labile sulfur when tested as specified in 3.2.3.1.

3.2.3.1 Presence of labile sulfur. In the determination of labile sulfur in textile materials with lead acetate, two (2) 1.50 (± 0.01) gram samples from each material submitted for evaluation shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. The samples shall be submersed in a stannous chloride solution that contains 100 grams of stannous chloride crystals ACS in 100 millimeters of hydrochloric acid ACS (35 percent concentration) and 50 milliliters of distilled water. A filter paper wet out with a 5.0 percent lead acetate solution shall be placed over the top of the test tube. The lead acetate solution contains 5.0 grams of lead acetate CP reagent grade and enough distilled water to make up a 100 milliliter solution; if the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The test tube containing the textile sample, stannous chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

Free	- The filter paper shows no discoloration of staining of any kind.
Slight	- The filter paper shows a light tan to light brown discoloration stain.
Moderate	- The filter paper shows a dark brown discoloration stain.
Severe	- The filter paper shows a black color stain.

The rating shall be recorded. The results shall be recorded as “pass” or “fail”.

3.3 Thread. The thread for seams and stitching shall be a 2-ply cotton or staple polyester-covered, polyester core thread cotton covered polyester core, Tex 36-45 or commercially equivalent thread with a minimum breaking strength of 3.2 pounds or Tex 31-35 with a minimum breaking strength of 2.6 pounds when tested in accordance with ASTM D2256. The color shall approximate the shade of the basic material and shall show colorfastness to crocking, laundering and light equal to the requirements and test methods for the basic material in Table I.

3.3.1 Sticthing. All stitching shall be 12 (± 2) stitches per inch. The collar and protective fly shall be top stitched 3/16 to 1/4-inch from the edge. All joining seams shall be double-lapped double-stitched, 1/4-inch gage. The back shall overlap the front at the shoulders. Side, underarm and outseams may lap in either direction but shall be in the same direction on the top and bottom. All pockets shall be set using double stitched seams; 3/16 to 5/16-inch gage with first row of stitching 1/32 to 1/16-inch from turned edge. All other seams shall be overedged or otherwise clean finished. Bartacking shall be 3/8 (± 1/16) inch long, and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching. Bartacks shall be located in the following areas for reinforcement: left breast pocket for pencil opening, at corners of all pocket openings, at top of slide fastener on fly front and on bottom of slide fastener.

3.3.2 Elastic webbing. The webbing shall be Type II, 1-1/2 inches wide in accordance with MIL-W-5664, except the colorfastness requirements do not apply.

3.3.3 Slide fastener. The nonseparating, nonreversible, size 5-7 slide fastener without automatic pin or cam, shall be individual element molded plastic with top stops and bottom stops. Pre-assembled or continuous chain application may be used. The color of the plastic components and tape shall approximately match the basic material. The tape shall be 100 percent textured polyester. The length of the slide fastener shall fit the front opening shown on patterns. The crosswise breaking strength of the chain shall be 110 pounds per inch when tested in accordance with ASTM D2061. The fastener chain shall meet a minimum endurance of 1000 cycles when tested using an endurance testing machine such as a British Standard Reciprocator (BSR) or equal. The machine shall be set up with 3.5 pounds lateral force and 3.1 pounds longitudinal force in accordance with ASTM D2061.

3.3.4 Hook and loop fastener tape. Unless otherwise specified, the hook and loop fastener tape shall be a minimum of 1-inch wide, with a 6.5 millimeters nylon hook (220 denier) and nylon ground. The hook and loop tapes shall be stabilized as necessary to allow for maximum flatness and dimensional stability. The color of the hook and loop fastener tape shall approximately match the basic material. The fastener tape shall be stitched to the coverall according to the marks on the pattern1/8 inch from the edge. The hook and loop shall meet the requirements as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

TABLE II. Hook and loop physical requirements.

Characteristic	Requirement		Test Method
	Hook	Loop	
Weight, grams per linear yard (max.)	5.6	7.4	ASTM D3776/D3776M, Opt. C
Breaking strength, pounds (min.)	115	95	ASTM D5034
Shear strength, pounds per inch (min.)	7.5	7.5	ASTM D5169, ASTM D5170 or ASTM D5034

3.4 Combination size, identification, and instruction label. Each coverall shall have a combination size, identification, and instructions label in accordance with Type V or Type IV, Class 14 of MIL-DTL-32075. The label shall be sewn on all sides and placed on the inside center back just below the collar and shall contain the following information:

SIZE: MEDIUM (EXAMPLE)
ITEM NAME:
NSN: XXXX-XX-XXX-XXXX
CONTRACT NUMBER:
CONTRACTOR'S NAME:
FIBER CONTENT:

Wash using NAVEDTRA 414-01-4581 Formula II: Hot formula (140º F) without bleach, permanent press cycle or hand wash/warm water.

3.4.1 Bar coded hang tag. Each plastic bag shall be individually bar-coded with a commercially acceptable pressure sensitive label. The bar coding element shall be a 13 digit National Stock Number (NSN). There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The bar code for the NSN and the UPC type shall be a medium to high code density and shall be located so that it is completely visible and causes no damage to the item. This UPC code must also be located so that it is completely visible on the item when folded and/or packaged as specified. Each tag shall have in addition the following inscription:

MADE FOR DEFENSE LOGISTICS AGENCY
MANUFACTURER'S NAME
CONTRACT #
SIZE:
NSN:
DESCRIPTION: COVERALLS, UTILITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3.5 Patterns. The Government shall furnish a complete set of patterns or a master pattern with grade rules to maintain uniformity and consistency in manufacturing. The Government patterns shall be used to create the contractor's working patterns. Pattern guidelines shall not be modified. The Government will furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. Minor pattern modifications are permitted to accommodate manufacturing procedures; however the design and finished measurements must be obtained. A full set of patterns are available upon request. Commercial patterns may be used in lieu of Government furnished patterns provided that they conform to the cited design and finished dimensions. The standard pattern provides a seam allowance of 1/2 inch for shoulder seams, sleeve setting, inseams, crotch seams, side seams pocket and flaps, and 3/8 inch for all other seams.

3.6 Sizes and finished measurements (all types). The finished coveralls shall conform to measurements as specified in Table III. The coveralls shall be measured lying flat with the front slide fastener completely closed.

TABLE III. Sizes and finished measurements (inches) (all types).

Sizes	1/2 Chest 1/	1/2 Waist 2/	Sleeve inseams 3/	Leg inseams 4/	Overall Length 5/
XX-Small	18-1/2	15	23	32	63-1/2
X-Small	20-1/2	17	23	32	64-1/2
Small	22-1/2	19	23	32	65-1/2
Medium	24-1/2	21	23	32	66-1/2
Large	26-1/2	23	23	32	67-1/2
X-Large	28-1/2	25	23	32	68-1/2
XX-Large	30-1/2	27	23	32	69-1/2
Tolerance (inch)	±1/2	±1/2	±1/2	±1/2	±1/2

1/ 1/2 Chest - Measurement taken across the front from base of armhole to base of armhole.
2/ 1/2 Waist - Measurement taken across the waist from side seam to side seam in a relaxed position.
3/ Sleeve inseam - Measurement taken from the base of the armhole along the inseam to the bottom of the sleeve hem.
4/ Leg inseam - Measurement taken from the crotch seam along the inseam to the bottom of leg hem.
5/ Overall length - Measurement taken from base of neck along the center back to bottom of leg.

3.7 Toxicity. The cloth used on the finished coveralls shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 5.5. Chemicals recognized by the Environmental Protection Agency (EPA) as human carcinogens shall not be used.

3.7.1 Toxicity test. When required (see 7.2.3), an acute dermal irritation study and a skin sensitization study shall be conducted. When the results of the studies indicate the cloth is not a sensitizer or irritant, a Repeat Insult Patch Test shall be performed in accordance with the Modified Draize Procedure (see 7.2.3). If the toxicity requirement (see 3.7) can be demonstrated

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.5).

3.8 Workmanship. The finished coveralls shall conform to the quality of the product established in this document. The coveralls shall be free from defects which would affect its serviceability, appearance and uniformity.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The coveralls shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The coveralls offered, or generic equivalent, must have been sold to commercial market or the Government.

5.3 Visual examination. Each coverall shall be examined for the defects listed in Table IV in accordance with ASQ/ANSI-Z1.4. The lot size shall be expressed in units of coveralls. The sample unit shall be one (1) coverall.

TABLE IV. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, pleat, or crease; any spot or stain on outside, discoloration or color not as specified, any outwardly visible part shaded, any serious material defects, any objectionable odor.
Seams and stitching: Loose or tight stitching tension, broken or missing thread or stitch, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread breaks, thread ends not removed, any seam puckered, pulled, distorted, pleated, irregular or open, pulled or snagged stitches, twisted seams.
Workmanship: Any component part omitted, twisted, not specified size, missing, misplaced or poorly shaped; pockets out of alignment, any dimension of item not as specified; design not as specified. Distorted parts or poor workmanship.
Labels: Label(s) missing, incorrect, or illegible; bar code or UCP code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

5.4 Dimensional examination. The finished coverall shall conform to the dimensions specified in Table III when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) coverall.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.5).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.5).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.2 Source of non-Government documents.

7.2.1 AATCC Standards are available for purchase online at https://www.aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://www. asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.2.4 Modified Draize Procedure (Repeat Insult Patch Test): Principles and Methods of Toxicology, A Wallace Hayes (editor) is available online at. https://www.crcpress.com.

7.3 Intended use. The item is intended to be used as utility coverall by military personnel.

7.4 Standard samples. For access to standard shade samples of cloth, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this commercial item description
b. Type and size required (see 2.1 and 2.2)
c. Color required (see 3.2.2)
d. When toxicity testing is required (see 3.7 and 3.7.1)
e. Product conformance provisions (see 5.1)
f. Acceptance criteria (see 5.5)
g. Packaging requirements (see 6.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

7.6 Visual shade matching. In 2019, Option A of AATCC Evaluation Procedure 9, Visual Assessment of Color Difference of Textiles was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.7 Key words.

Harness
Sateen weave

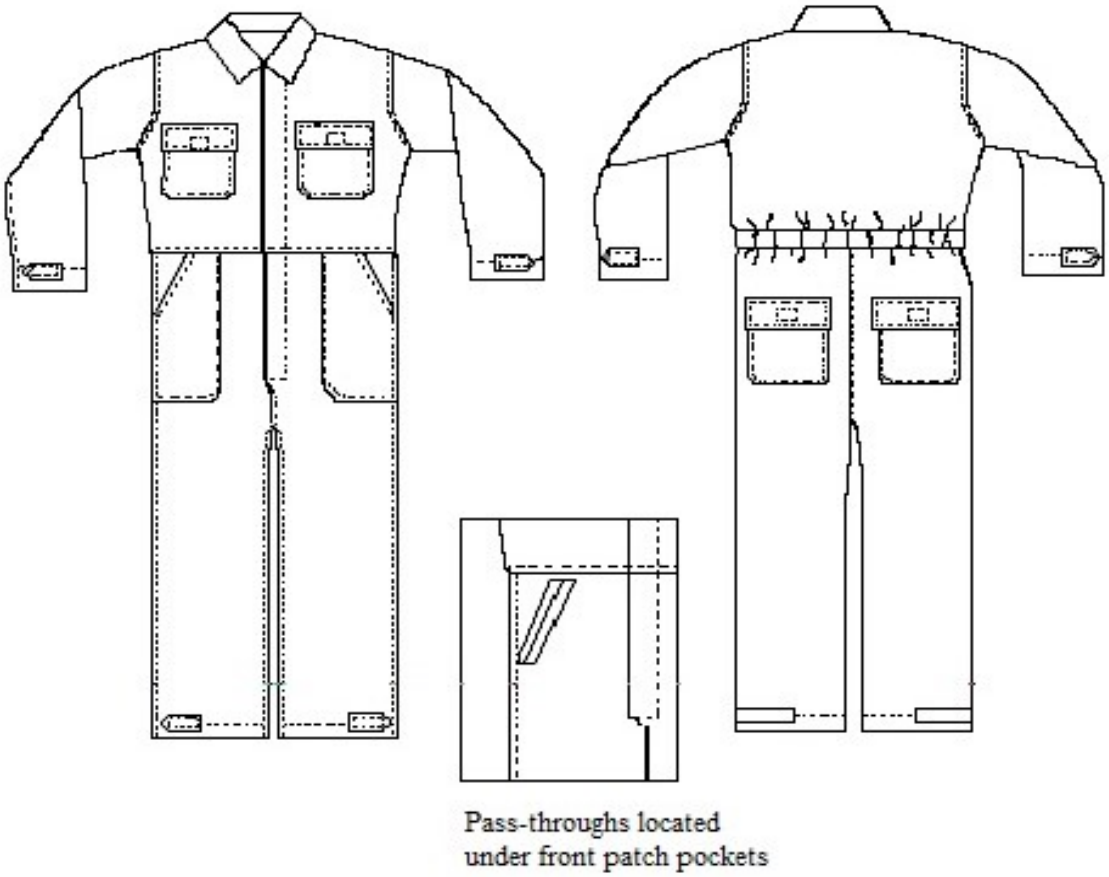


FIGURE 1. Coverall, Utility front and back view

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Custodians:
Army - GL
Navy - NU
Air Force - 11

Preparing Activity
DLA-CT

Review activities:
Army - MD
Navy – CG1, MC

(Project: 8415-2020-049)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.