NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-27/111


30 July 1976

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE)
INDUCTOR, AUDIO, TYPE TF4U20YY930

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inductor described herein shall consist of this document and the latest issue of Specification MIL-T-27.

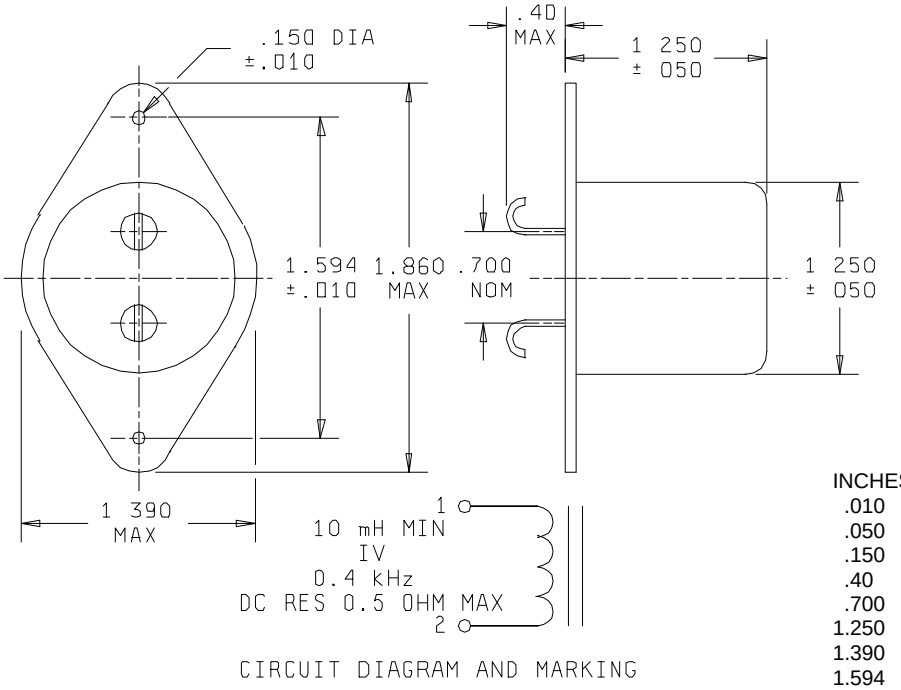


CIRCUIT DIAGRAM AND MARKING

| INCHES | MM |
|---|---|
| .010 | 0.25 |
| .050 | 1.27 |
| .150 | 3.81 |
| .40 | 10.16 |
| .700 | 17.78 |
| 1.250 | 31.75 |
| 1.390 | 35.31 |
| 1.594 | 40.49 |
| 1.860 | 47.24 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configurations.



FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Inductance (1-2): 10 mH minimum.
Voltage (1-2): 1 volt rms, 0.4 kHz.
Current (1-2): .050 ampere dc.
DC resistance (1-2): 0.5 ohm dc maximum.
Working voltage: 10 volts maximum.
Power: 0.05 watt maximum.

Design and construction:
Dimensions and configuration: See figure 1.
Weight: 0.17 pound.
Duty cycle: Continuous.
Case: Metal.
Material: Epoxy filled.
Operating temperature range: -55° to 171°C.
Terminals: Brass, solder type, glass to metal compression seal.
Terminal length: 0.40 inch maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage: MIL-STD-202, method 301.
At sea level: 50 volts rms.
At barometric pressure: 50 volts rms.

Electrical characteristics:
Inductance: With 1 volt rms, 0.4 kHz across, and .050 ampere dc applied to (1-2), the inductance shall be 10 mH minimum.

Marking location: See figure 1.
Part number: M27/111-01.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, SG
Navy - EC, SH, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - MU, WC, SG, ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5950-0319-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

## SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-T-27/111 TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE) INDUCTOR, AUDIO, TYPE TFLU20YY930

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: [redacted]- DRSEL-KD-TS-S
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.