NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-27/96
12 May 1976


PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TF5R21ZZ915

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of specification MIL-T-27.

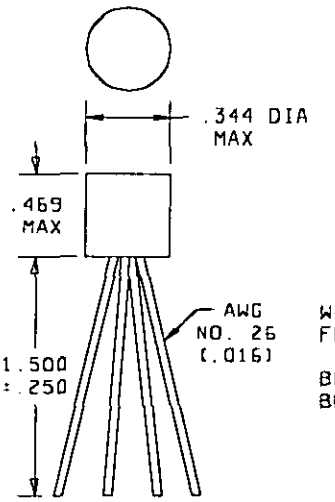

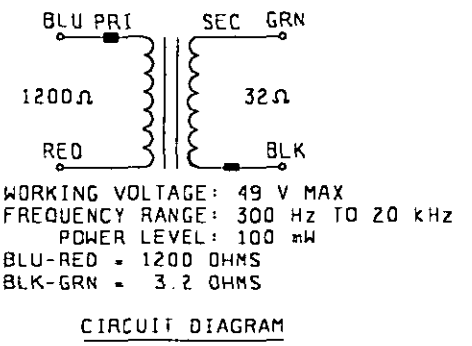

CIRCUIT DIAGRAM

INCHES	MM
.344	8.74
.469	11.91
1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The number of terminals shall be as shown in circuit diagram.
4. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Electrical ratings
  Primary power level - 100 mW
  Working voltage - 49 V maximum
  Primary current - 2 mAdc
  Primary impedance - (BLU-RED) 1200 ohms
  Secondary load impedance - (BLK-GRN) 3.2 ohms.

Design and construction
  Dimensions and configuration See figure
  Duty cycle Continuous
  Terminals Solid wire, insulated
    Material - Insulated type D, per MIL-STD-1276
    Diameter - 0.016 inch
    Length - 1.500 inches ±0.250
  Weight 3.5 grams
  Operating temperature range -55°C to +105°C
  Altitude 70,000 feet

Terminal strength Method 211 of MIL-STD-202, test condition A, 2 pounds

Dielectric withstanding voltage
  At sea level - 100 Vrms
  At reduced barometric pressure - 100 Vrms

Electrical characteristics
  Primary impedance (BLU-RED) 1200 ohms with approximately 11 volts, 1 kHz and 2 mAdc applied to (BLU-RED) and 3.2 ohms across (BLK-GRN)
  Harmonic distortion Total harmonic content of output 5% with 11 volts, 1 kHz and 2 mAdc applied to (BLU-RED)
  Resonance Second resonant frequency -20 kHz minimum
  Frequency response Z_s=1200 ohms (BLU-RED), Z_L = 3.2 ohms (BLK-GRN), E_s=2.5 volts, reference frequency = 1 kHz, frequency range = 300 Hz to 20 kHz ±3 dB
  Polarity Additive, with terminals RED and BLK connected

Vibration high frequency MIL-STD-202, method 204, test condition B

Part number M27/96-01

Custodians
  Army - EL
  Navy - EC
  Air Force - 85

Review activities
  Army - EL, MI, SG
  Navy - EC, SH, OS
  Air Force - 11, 17, 80
  DSA - ES

User activities
  Army - MU, WC, SG, ME
  Navy - MC, AS, SH, OS
  Air Force - 19

Preparing activity
  Army - EL

Agent
  DSA - ES

(Project 5950-0508-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-T-27/96 TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TF5R21ZZ915

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 86 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-PM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.