INCH-POUND

MIL-PRF-27/97D
18 July 2008
SUPERSEDING
MIL-PRF-27/97C
2 June 2003

PERFORMANCE SPECIFICATION SHEET

TRANSFORMERS, AUDIO FREQUENCY, SUB-MINIATURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification and MIL-PRF-27.

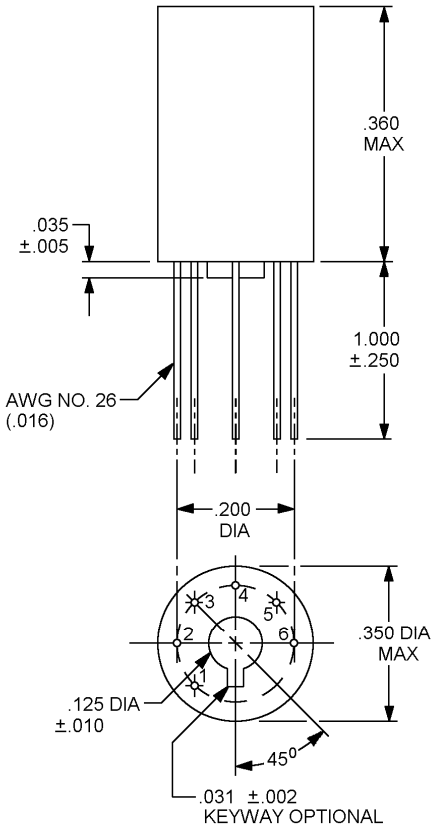

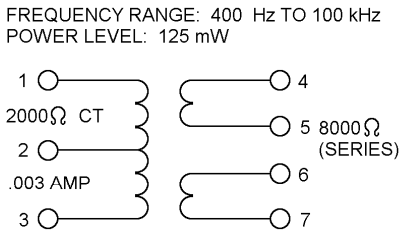



CIRCUIT DIAGRAM

Inches	mm
.002	0.05
.005	0.13
.010	0.25
.016	0.41
.031	0.79
.035	0.89
.125	3.18
.200	5.08
.250	6.35
.350	8.89
.360	9.14
1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The number of terminals shall be as shown in circuit diagram.
4. Terminals are spaced the same as “TO-76” transistors and micrologic elements.
5. For vibration and shock test, the specimen shall be rigidly mounted on a printed circuit board.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Electrical ratings: See table I.

Primary power level: 125 mW.

TABLE I. Electrical ratings.

Dash number	Circuit diagram	Primary impedance (ohms)	Secondary Impedance (ohms)	Primary dc current (mA)	Primary dc resistance ±25 percent (ohms)	Secondary dc resistance ± 25 percent (ohms)	Working voltage (volts)
01	A	2,000 CT	(4-5) 8,000 (6-7) 8,000	3	200	(4-(5+6)-7) 450	49
02	B	10 k	100	1	1,000	10	50

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Terminals: Pin for printed circuit.

Material: Type D in accordance with MIL-STD-1276.

Diameter: .016 inch.

Length: 1.000 ± .250 inch.

Weight: 2.4 grams maximum.

Operating temperature range: -55°C to +105°C.

Altitude: 70,000 feet.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage:

At sea level: 100 volts rms.

At reduced barometric pressure: 100 volts rms.

Electrical characteristics:

Harmonic distortion: Total harmonic content of output 5 percent at 1 kHz.

No load (CT voltage balance only): With 10 volts, 10 kHz applied to (1-3), unbalance (4-5) and (6-7) shall be 3 percent, maximum.

Self-resonant frequency: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

Frequency response: See table II.

Polarity: See table II.

Vibration, high frequency: MIL-STD-202, method 204, test condition B.

TABLE II. Electrical characteristics.

Dash number	Frequency response ±3 dB at 400 Hz to 100 kHz and 1 mW			Resonance, self resonant frequency (min)	Polarity (additive with terminals connected)
	Z_S	Z_L	E_S		
			volts	kHz	
01	2 kΩ	8 kΩ	3	40	3-4 and 5-6
02	10 kΩ	100 Ω	6.32	---	2-4

Part or Identifying Number (PIN): M27/97- (dash number from table I).

TABLE III. Substitution data 1/

PIN M27/97-	CAGE	Manufacturer's PIN
01	31669	C265
02	31669	C3375

1/ These transformers are substitutable for the manufacturer's PINs. This in no way implies that the manufacturer's PIN is substitutable for the military PIN. This information is not intended to be complete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202
MIL-STD-1276

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA – CC

(Project 5950-2008-018)

Review activities:
Army – AR, CR4
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.