MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEPDOWN, TF5S03ZZ937

(B) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

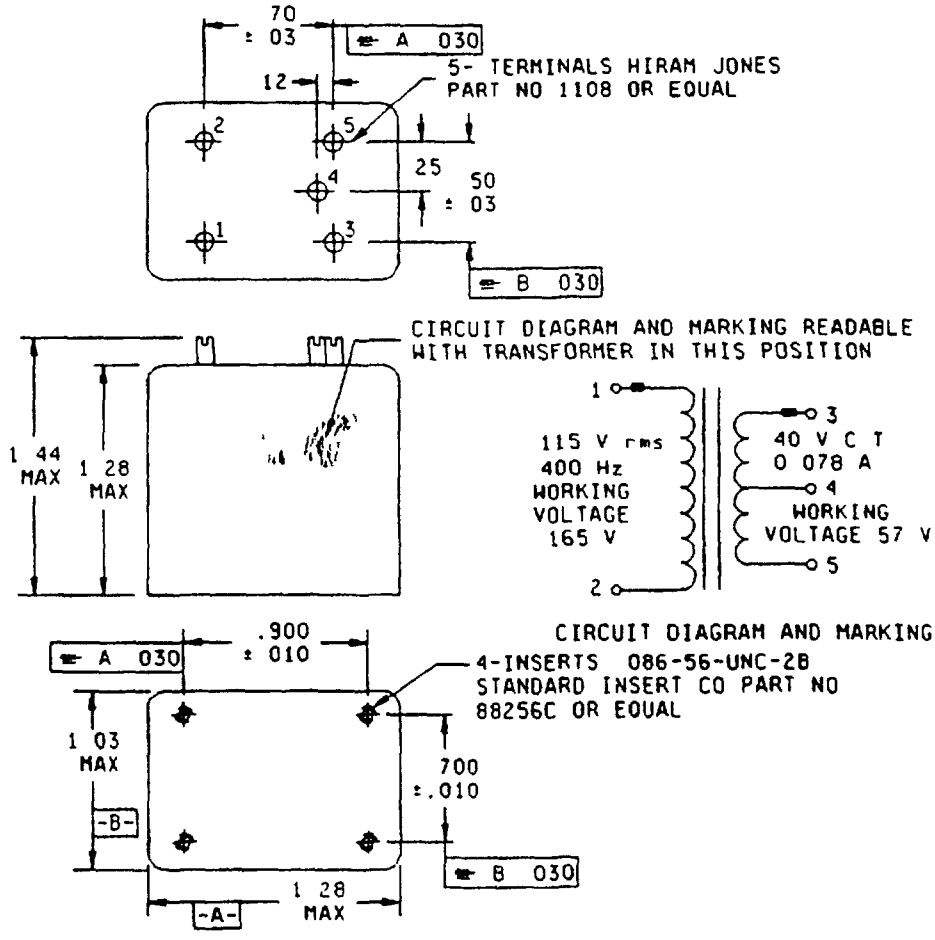


FIGURE 1 Dimensions and configurations

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.

Inches	mm
010	0 25
03	0 8
.086	2 18
12	3 1
.23	5 8
25	6 4
50	12 70
70	17 8
900	22 86
1 03	26 2
1.28	32 5
1 44	36 6

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Marking shall be on the side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary voltage (1-2) 115 V rms, 400 Hz

Secondary voltage (3-5) 40 V rms ct, 0 078 ampere rms

Working voltage

(1-2) 165 V maximum

(3-5) 57 V maximum

DC resistance

(1-2) 22 9 ohms ±15 percent

(3-5) 6 7 ohms ±15 percent

Design and construction

Dimensions and configuration See figure 1.

Duty cycle Continuous

Case Epoxy molded

Altitude 10,000 feet maximum

Terminals Hiram Jones part number 1108 or equivalent

Height 16 inch

Weight 2 pound maximum

Operating temperature range -55°C to +130°C, maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Dielectric withstanding voltage (at sea level)

(1-2) 500 V rms

(3-5) 100 V rms

Electrical characteristics

No load With 115 v and 400 Hz in (1-2), current in (1-2) shall not exceed 0 06 ampere rms, and power in (1-2) shall not exceed 1 2 watts Voltage across (3-5) shall be 41 75 V ±1 percent, center tap ±0 5 percent

Rated load With 115 V, 400 Hz across (1-2) and 0 078 ampere rms in (3-5), the voltage across (3-5) shall be 40 V rms, center tap ±5 percent

Polarity Additive, with terminals 2 and 3 connected

Temperature rise 17°C with 115 V rms, 400 Hz across (1-2) at an ambient temperature of 113°C, and 0 078 ampere rms across (3-5)

Shock (specified pulse) MIL-STD-202, method 213, test condition letter K

(B) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/118-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:33Z
Check the source to verify that this is the current version before use.