INCH-POUND

MIL-T-27/119B
20 April 1993
SUPERSEDING
MIL-T-27/119A
13 April 1988

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTOR, POWER, TF5S042Z938

(B) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

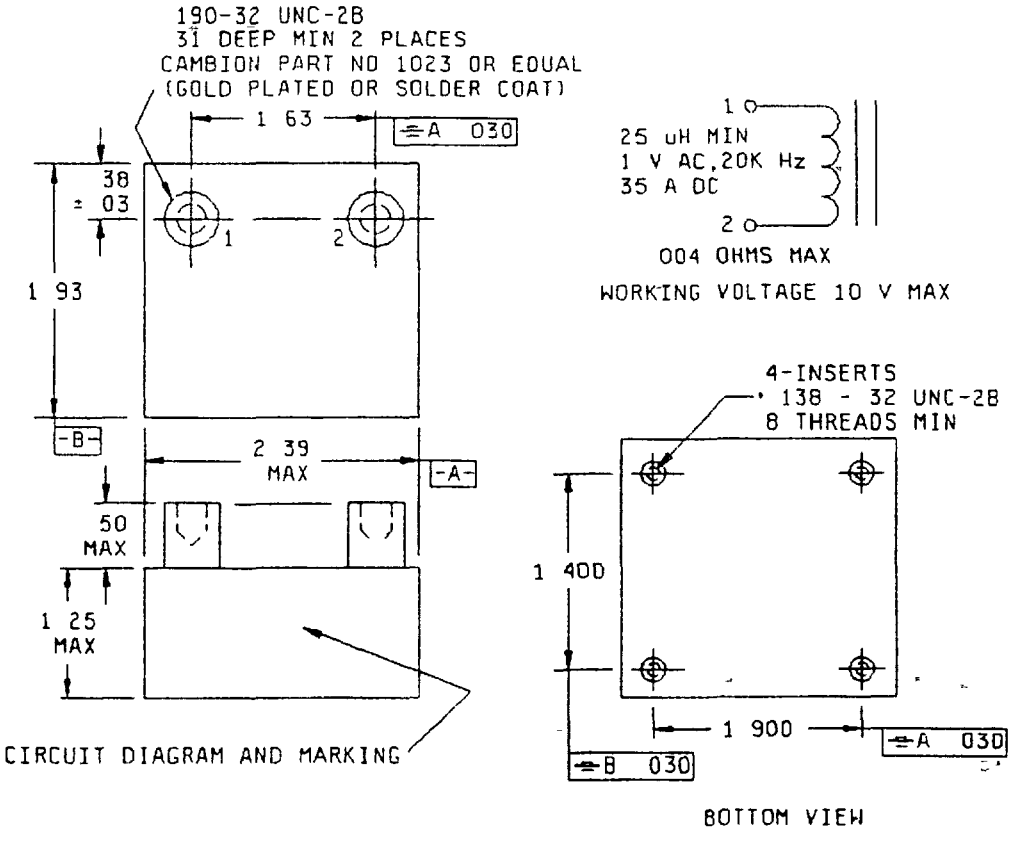


FIGURE 1. Dimensions and configurations

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Inches	mm
030	0 76
138	3 50
190	4 83
38	9 7
.50	12.7
1 25	31 8
1 400	35 56
1 63	41 4
1 900	48 26
1 93	49 0
2 39	60 7

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Marking shall be on the side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Inductance 25 µH minimum

Voltage (1-2) 1 V rms, 20 kHz

Current (1-2) 35 amperes dc

DC resistance (1-2) 0 004 ohm maximum

Working voltage 10 V maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy, fiberglass potting cup

Altitude 10,000 feet maximum

Terminals Internal screw thread - Cambion part number 1023 or equivalent (gold plated or solder coated)

Weight 7 pound

Operating temperature range -55°C to +130°C, maximum

Terminal strength MIL-STD-202, method 211, test condition E, 15 inch pound

Dielectric withstanding voltage (at sea level) 100 V rms

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Electrical characteristics

Inductance With 1.0 V rms, 20 kHz, and 35 amperes dc applied to (1-2), the inductance shall be 25 µH minimum.

Temperature rise 60°C maximum, with 1.0 V rms, 20 kHz, 35 amperes dc applied to (1-2) at an ambient temperature of +70°C maximum

Shock (specified pulse) MIL-STD-202, method 213, test condition letter K

(B) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/119-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.