INCH-POUND

MIL-T-27/120B
20 April 1993
SUPERSEDING
MIL-T-27/120A
13 April 1988

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTOR, POWER, TF5S04Z2939

(B) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

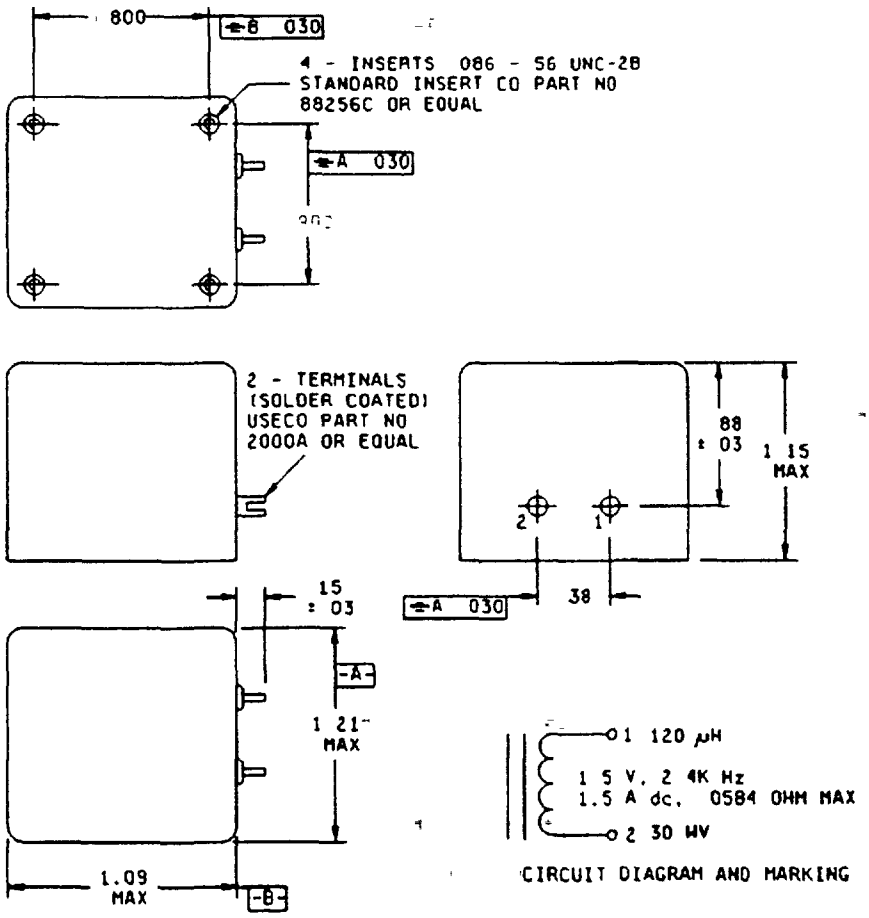


FIGURE 1. Dimensions and configurations

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Inches	mm
03	0 8
086	2 18
15	3 8
38	9 7
.800	20 32
88	22 4
900	22 86
1 09	27 7
1 15	29 2
1 21	30 7

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Marking shall be on the side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Inductance (1-2) 120 µH minimum

Voltage (1-2) 1 5 V rms, 2 4 kHz

Current (1-2) 1 5 amperes dc

DC resistance (1-2) 0 0584 ohm maximum

Working voltage 30 V maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Altitude 10,000 feet maximum

Terminal type USECO 2000A or equivalent (solder coated)

Weight 14 pound maximum

Operating temperature range -55°C to +130°C, maximum

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage (at sea level) 100 V rms

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Electrical characteristics

Inductance With 1 5 V rms, 2 4 kHz, and 1 5 amperes dc applied to (1-2), the inductance shall be 120 µH minimum

DC resistance at +25°C 0584 ohm across (1-2) maximum

Temperature rise +28°C maximum, with 1 5 V rms, 2 4 kHz, 1 5 amperes dc applied to (1-2) at an ambient temperature of +102°C

Shock (specified pulse) MIL-STD-202, method 213, test condition letter K (no load condition)

(B) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/120-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.