INCH-POUND

MIL-T-27/122C
20 April 1993
SUPERSEDING
MIL-T-27/122B
19 April 1988

MILITARY SPECIFICATION SHEET

TRANSFORMERS, SATURABLE, TF5S40ZZ909

(C) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

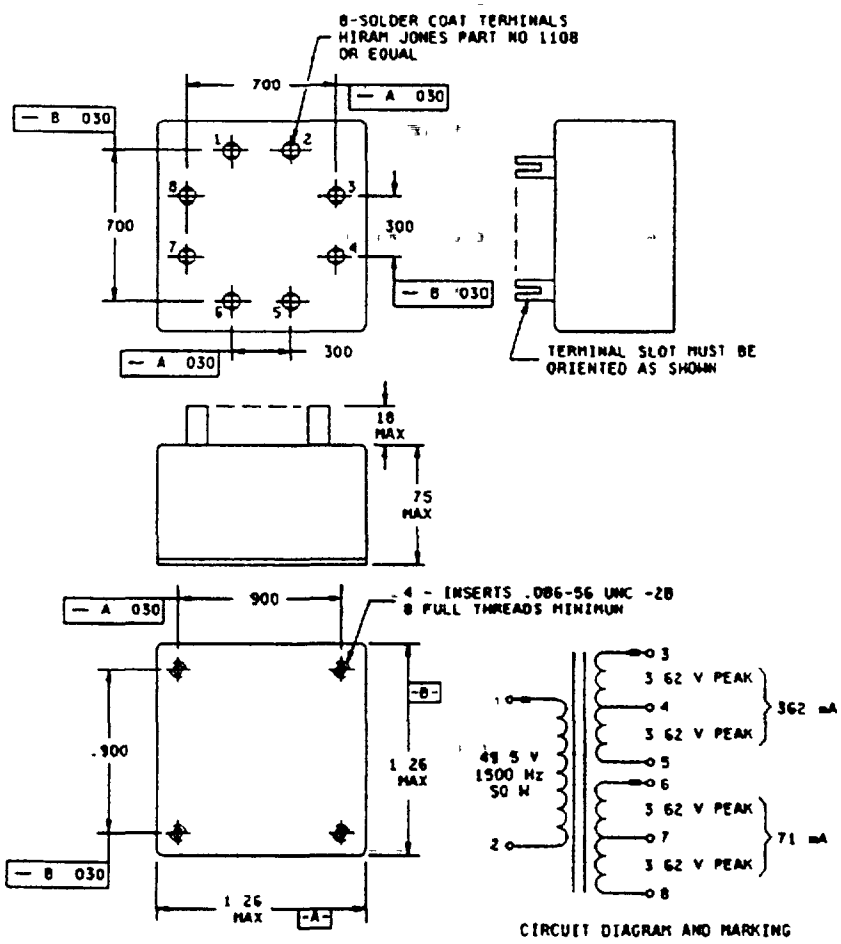


FIGURE 1 Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Inches	mm
030	0 76
086	2 18
18	4 6
300	7 62
700	17 78
75	19 1
900	22 86
1 26	32 0

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Marking shall be on side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary voltage (1-2) 49 5 V zero to peak, 1,500 Hz square wave

Secondary voltage

(3-4-5) 3 62 V zero to peak each half second, 362 mA zero to peak each half secondary

(6-7-8) 3 62 V zero to peak each half second, 71 mA zero to peak each half secondary

Working voltage 50 V

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Molded

Terminals Solder type, split stud, Hiram Jones part number 1108 or equivalent (solder coated)

Terminal height .18 inch maximum

Weight 0 12 pound

Operating temperature range -55°C to +130°C

Altitude 10,000 feet maximum

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Dielectric withstanding voltage (at sea level) 100 V rms

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Electrical characteristics

No load With 10 V rms, 1,500 Hz sine wave (1-2), voltage across (3-5) and (6-8) shall be 1 462 V ±10 percent, respectively center tap accuracy shall be ±0 5 percent and current in (1-2) shall be 0 0023 A rms maximum

Saturation voltage 42 3 V rms ±10 percent with 1,500 Hz sine wave voltage across (1-2) with all secondaries open circuited

Polarity Additive with terminals 2 and 3, and 5 and 6 connected

DC resistance

(1-2) 4 ohms maximum

(3-5) 1 ohm maximum

(6-8) 1 25 ohms maximum

Temperature rise 28°C maximum, with 38 V, 1,800 Hz across (1-2) at an ambient temperature of 102°C maximum, and (3-5) loaded with 362 mA rms and (6-8) loaded with 71 mA rms

Shock (specified pulse) MIL-STD-202, method 213, test condition letter K, under no load conditions

(C) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/122-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.