
MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR, POWER, TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the inductor described herein shall consist of this specification and the latest issue of MIL-T-27.

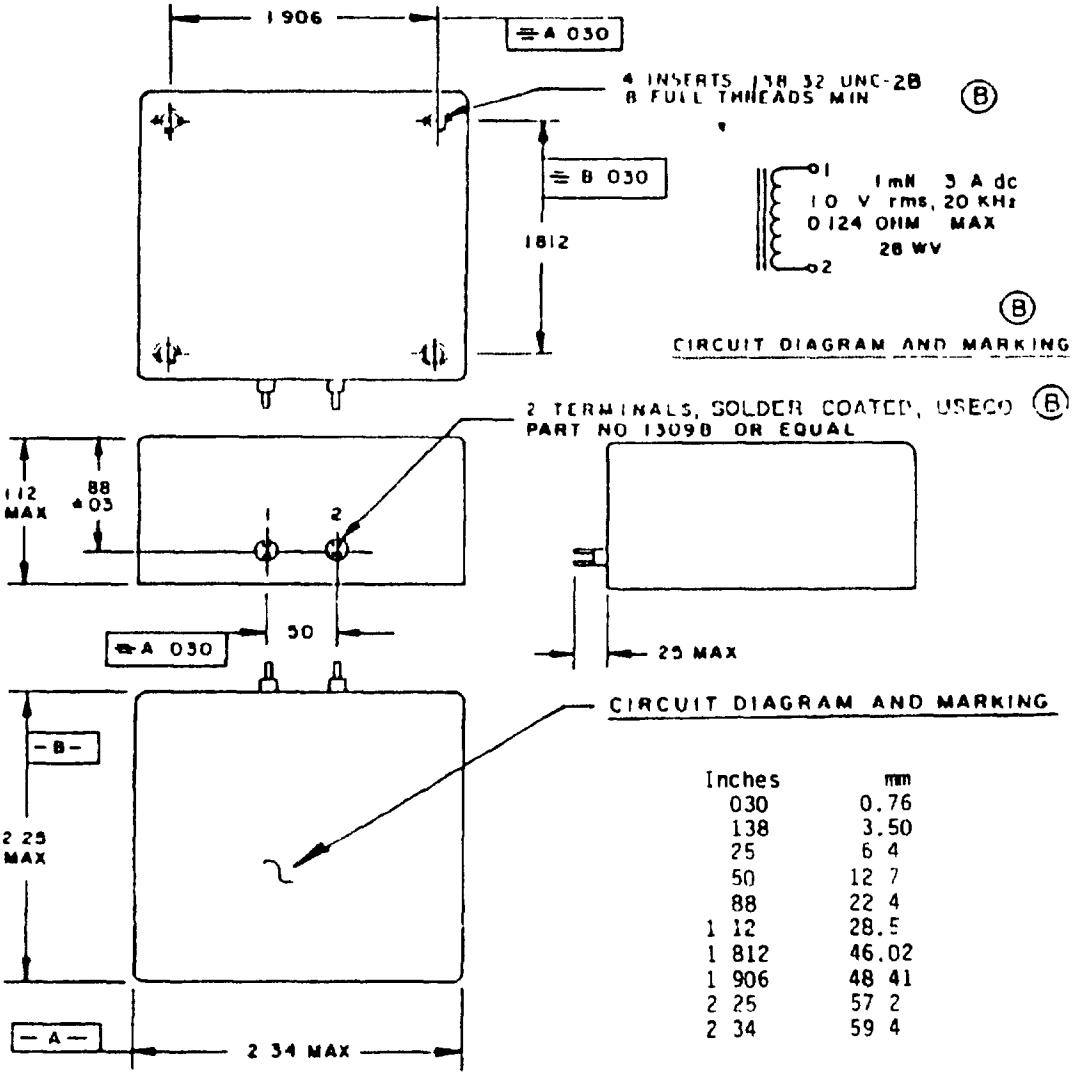

Inches	mm
030	0.76
138	3.50
25	6 4
50	12 7
88	22 4
1 12	28.5
1 812	46.02
1 906	48 41
2 25	57 2
2 34	59 4

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Marking shall be on the surface of the inductor as indicated

FIGURE 1 Dimensions and configuration

Ⓡ denotes change

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings

(B) Inductance (1-2) 1 mH +2, -20 percent.

Voltage (1-2) 1 V rms.

Frequency: 20 kHz.

Current (1-2): 3 A dc.

(B) DC resistance (1-2): 0.124 ohm maximum.

Working voltage. 28 V maximum.

Design and construction:

Dimensions and configuration See figure 1.

Duty cycle. Continuous

Case Molded.

Material. Epoxy.

Altitude 10,000 feet

(B) Terminal type. USECO part number 1309B or equal (solder coated).

Terminal height 0.25 inch maximum.

Weight .7 pound maximum.

Operating temperature range -55°C to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds

Dielectric withstanding voltage (at sea level): 100 V rms.

Electrical characteristics

(B) Inductance. 1 V rms ±1 percent, 20 kHz ±1 percent sine wave (1-2), with 3 A dc Inductance shall be 1 mH +2, -20 percent

DC resistance 0.124 ohm maximum.

Temperature rise: 17°C with 1 V rms, 20 kHz, 3 A dc (1-2) at an ambient temperature of 113°C maximum.

Shock (specified pulse) MIL-STD-202, method 213, test condition K

Marking location See figure 1.

Part number: M27/123-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity.
Army - ER

Agent:
DLA - ES

(Project 5950-0709)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.