INCH-POUND

MIL-T-27/124D
20 April 1993
SUPERSEDING
MIL-T-27/124C
25 April 1988

MILITARY SPECIFICATION SHEET

# TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR HIGH Q, TYPE TF5S2027

(D) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

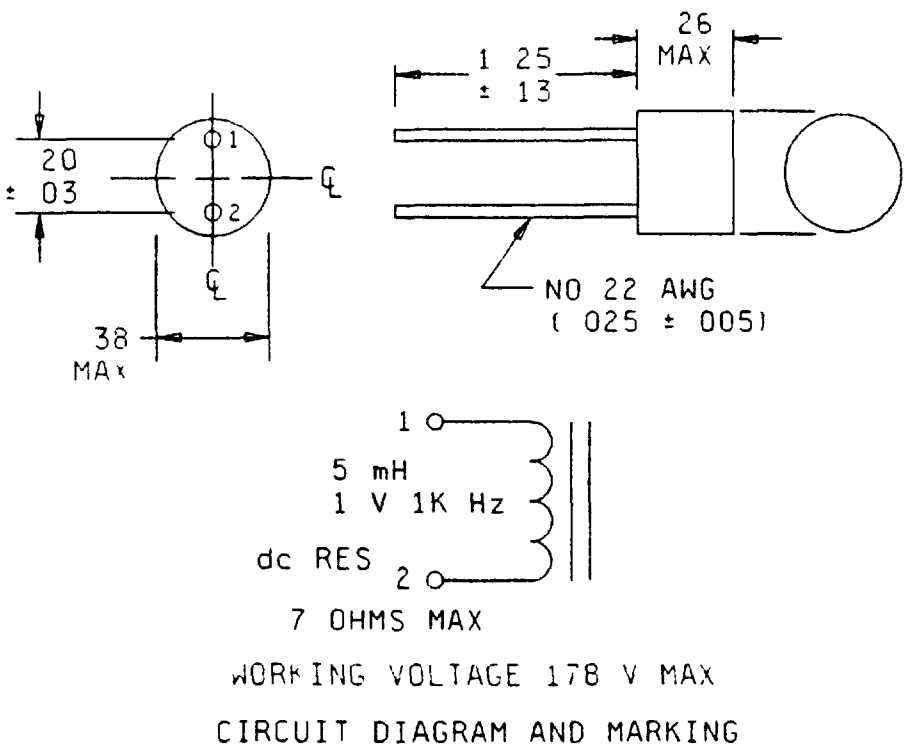



FIGURE 1 Dimensions and configurations

(D) denotes changes


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:34Z
Check the source to verify that this is the current version before use.

| Inches | mm |
|---|---|
| 005 | 0 13 |
| 025 | 0 64 |
| 03 | 0 8 |
| .13 | 3 3 |
| 20 | 5 1 |
| 26 | 6 6 |
| 38 | 9 7 |
| 1 25 | 31 8 |

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Marking shall be on the side and top of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings )

Electrical ratings

Inductance (1-2) 5 mH ±5 percent

Voltage (1-2) 1 V rms

Frequency 1 kHz

Current (1-2) 28 mA dc maximum

Working voltage 178 V maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy.

Altitude· 10,000 feet maximum

Terminals Solderable, printed circuit pins

Weight· 8 0 grams maximum

Operating temperature range -55°C to +130°C

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage (at sea level) 500 V rms



Source: https://assist.dla.mil -- Downloaded: 202610-16T03:34Z
Check the source to verify that this is the current version before use.

Electrical characteristics

Inductance With 1 V rms, 1 kHz, and 0 ampere dc applied to (1-2), the inductance shall be 5 mH ±5 percent

Q 30 minimum at 20 kHz

DC resistance (1-2) 7 ohms maximum

(D) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/124-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - OS
Air Force - 17, 99
DLA - ES

User activities
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-09)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:34Z
Check the source to verify that this is the current version before use.