INCH-POUND

MIL-T-27/126C
20 April 1993
SUPERSEDING
MIL-T-27/126B
25 April 1988

MILITARY SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, TF5S21ZZ

(C) Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27

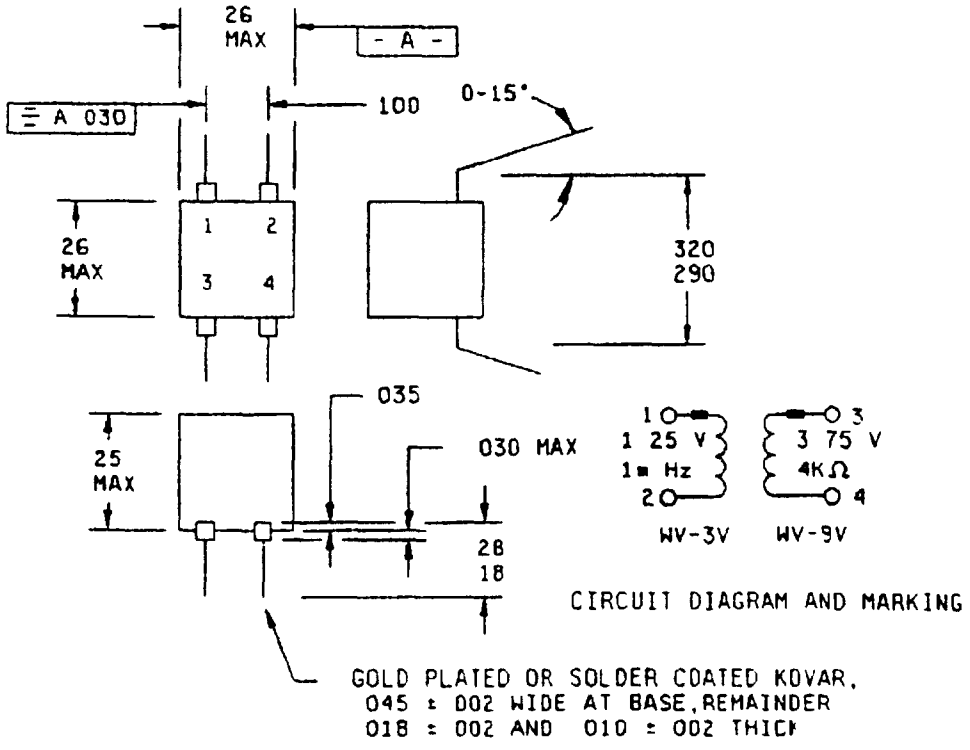


FIGURE 1 Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Inches	mm
002	0 05
010	0 25
018	0 46
030	0 76
.035	0.89
045	1 14
.100	2 54
18	4.6
.25	6 4
26	6.6
28	7 1
290	7 37
320	8 13

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. A tag with the required marking shall be attached to each unit

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS. (When numbers in parentheses, i.e., (1-3) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary power level 3 5 mW maximum

Source impedance (1-2): 0 ohm

Secondary load impedance (3-4). 4 kilohms.

Primary voltage (1-2): 1.25 V rms, 1 MHz.

Secondary voltage (3-4): 3 75 V rms with 4 kilohm load

Working voltage 3 V (1-2), 9 V (3-4)

Design and construction.

Dimensions and configuration See figure 1

Duty cycle· Continuous

Case: Molded, epoxy

Altitude 10,000 feet maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Terminals Gold plated or solder coated Kovar tabs, 0 010 inch x 0 045 inch

Terminal height 28 inch maximum

Weight 0 7 gram maximum

Operating temperature range -55°C to +130°C.

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage (at sea level) 100 V rms

Electrical characteristics

No load With 0 1 V rms, 10 kHz, 0 A dc applied to (1-2), current in (1-2) shall not exceed 7 8 mA rms

Voltage across (3-4) shall be 0 3 V rms ±3 percent

Leakage inductance With primary (1-2) shorted, inductance (3-4) using less than 1 V, 130 kHz shall not exceed 15 µH

Insertion loss 5 dB maximum with 1 25 V rms, input at 1 MHz across (1-2) and (3-4) loaded with 4 kilohms

DC resistance

(1-2): 1 95 ohms maximum
(3-4) 5 9 ohms maximum

Polarity: Additive with terminals 2 and 3 connected

Shock (specified pulse) MIL-STD-202, method 213, test condition K, under no load conditions

(C) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN): M27/126-01

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:34Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - OS
Air Force - 17, 99
DLA - ES

User activities
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity.
Army - ER

Agent
DLA - ES

(Project 5950-0815-10)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:34Z
Check the source to verify that this is the current version before use.