INCH-POUND

MIL-T-27/127C
20 April 1993
SUPERSEDING
MIL-T-27/127B
4 August 1982


MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN TF5S03ZZ

(C) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

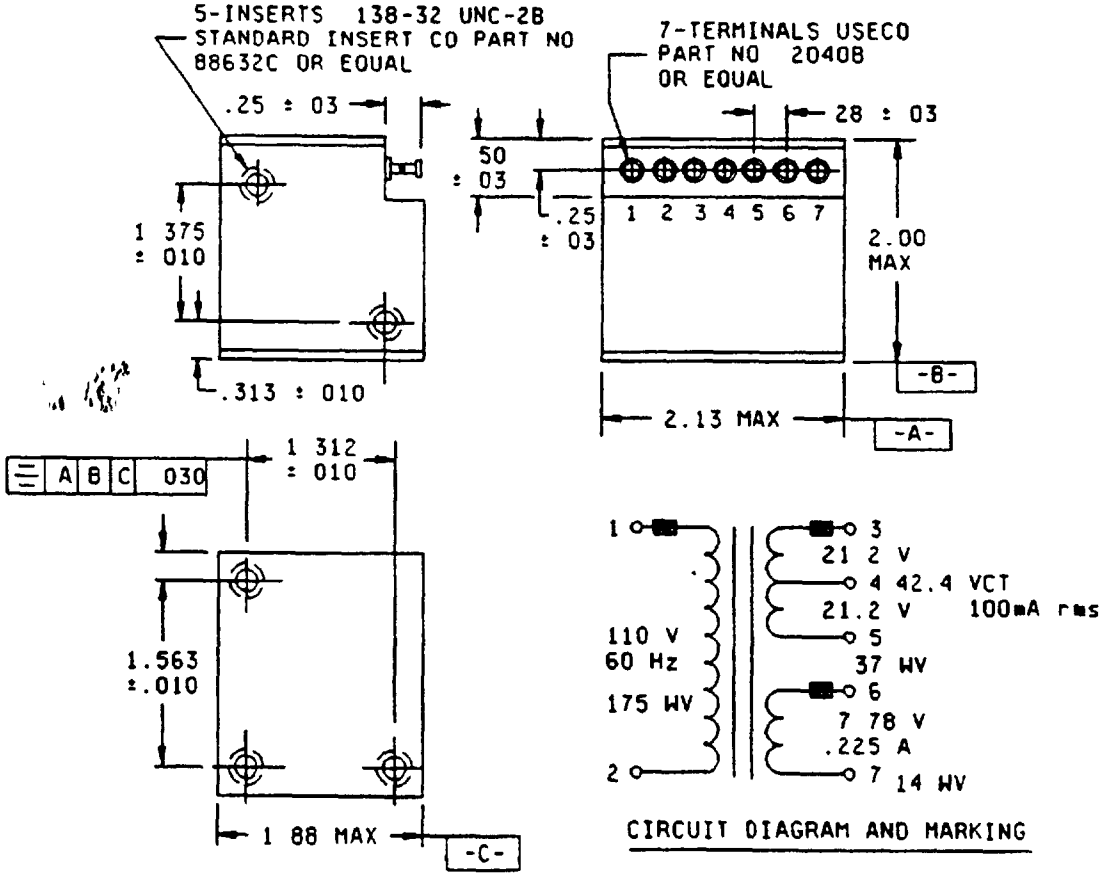

CIRCUIT DIAGRAM AND MARKING

FIGURE 1 Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
010	0 25	1 312	33 32
030	0 76	1 375	34 92
138	3 51	1 563	39 70
25	6 4	1 88	47 8
28	7 1	2 00	50 8
281	7 14	2 13	54 1
50	12 7		

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Marking shall be on the side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-3) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary voltage (1-2) 110 volts rms, 60 Hz

Secondary voltage

(3-4) and (4-5) 21 2 volts rms, 0 1 ampere rms, respectively, center tap shall be 42 4 volts, 100 milliamperes rms

(6-7) 7 78 volts rms, 0 225 ampere rms

Working voltage

(1-2) 175 volts
(3-5) 37 volts
(6-7) 14 volts

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Epoxy molded

Altitude 10,000 feet maximum

Terminals Solder type USECO 2040 B or equivalent

Height 25 inch

Weight 1 0 pound maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:34Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-T-27/127C
20 April 1993
SUPERSEDING
MIL-T-27/127B
4 August 1982

Operating te

Terminal stren

Dielectric with

(1-2) 500
(3-5) and (6

Electrical cha

No load Wi d 20 milliamperes rms and powe

Voltage acro center tap accuracy shall be ±0

Rated load

(3-4) and is

(6-7) shal

Polarity A cted

Temperature ri ure of 90°C

(C) Quality assura

Qualificatic

Quality con able

Marking locati

Part or Identi

ION SHEET


-DOWN TF5S03ZZ

ign after
ification

or use by all Depart-
partment of Defense

duct described herein shall
d the issue of the following
the Department of Defense
(DODISS) specified in the


7-TERMINALS USECO
PART NO 2040B
OR EQUAL

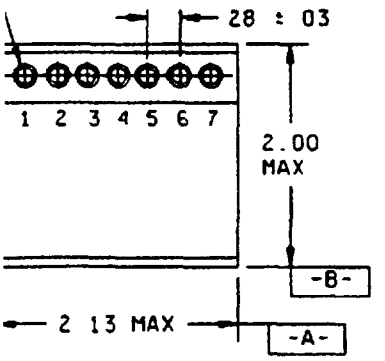

Custodians ring activity
Army - EF - ER
Navy - EC
Air Force
- ES

Review act
Army - MI ect 5950-0815-11)
Navy - OS
Air Force
DLA - ES

User activ
Army - MI
Navy - AS
Air Force

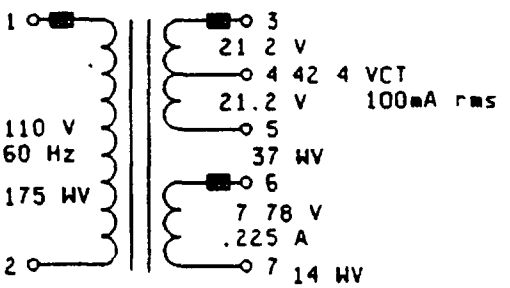

CIRCUIT DIAGRAM AND MARKING

configurations

nges

FSC 5950

tribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:34Z
Check the source to verify that this is the current version before use.