MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEPDOWN, TF4T03YY950

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.


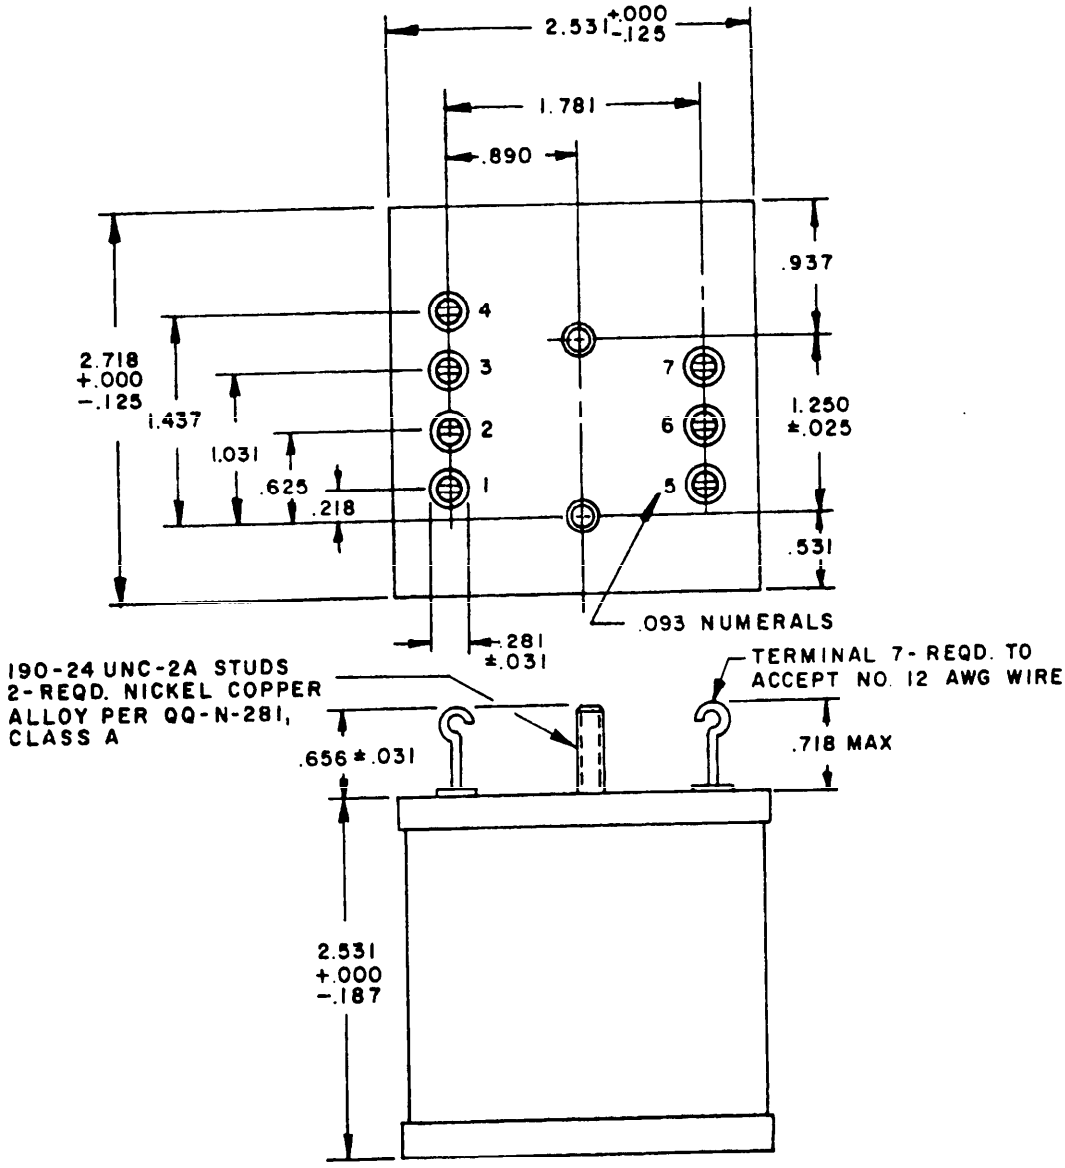


FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:35Z
Check the source to verify that this is the current version before use.

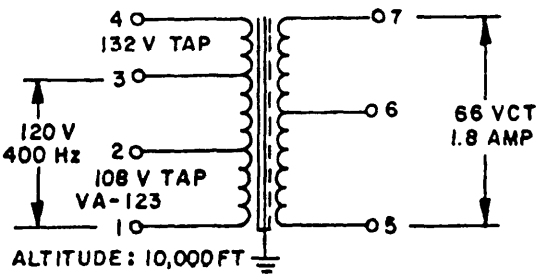

CIRCUIT DIAGRAM AND MARKING

INCHES	MM	INCHES	MM
.025	.64	.656	16.66
.031	.79	.718	18.24
.093	2.36	.890	22.61
.125	3.18	.937	23.80
.187	4.75	1.031	26.19
.190	4.83	1.250	31.75
.218	5.54	1.437	36.50
.281	7.14	1.781	45.24
.531	13.49	2.531	64.29
.625	15.88	2.718	69.04

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerance on terminal position dimensions is ±.015 (.40 mm).
4. Marking shall be on the top of the case.

FIGURE 1. Dimensions and configuration -Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:35Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS: (When number in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Volt ampere: 123.
Primary voltage:
(1-2): 108 Vrms, 400 Hz.
(1-3): 120 Vrms, 400 Hz.
(1-4): 132 Vrms, 400 Hz.
Secondary voltage:
(5-7): 66 volts rms center tap, ±3 percent, 1.8 ampere rms.
DC resistance:
(1-2): 3.4 ohms maximum.
(1-3): 3.8 ohms maximum.
(1-4): 4.3 ohms maximum.
(5-7): 1.2 ohms maximum.
Working voltage:
(1-2) and (3-5) shall not exceed 350 volts, respectively.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Metal.
Terminals: Solder type, glass to metal seal.
Terminal height: 0.178 inch maximum.
Operating temperature range: -55 °C to 170°C.
Weight: 2 pounds maximum.
Altitude: 10,000 feet maximum.
Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage (at sea level): 1,500 volts rms.

Electrical characteristics:
No load: With 108, 120, 132 volts rms, 400 Hz across (1, 2, 3, 4) current in (1, 2, 3, 4) shall not exceed 300 mA, and the power in (1, 2, 3, 4) shall not exceed 4 watts.
Voltage across (5, 6, 7) shall be 71.2 volts center tap ±2 percent.
Rated load: With 108, 120, 132 volts rms, 400 Hz across (1, 2, 3, 4) the voltage across (5, 6, 7) shall be 66 volts center tap ±3 percent at 1.8 ampere rms.

Temperature rise: 90°C maximum with 132 Vrms, 400 Hz across (1-4) at an ambient temperature of 80°C maximum.

Marking location: See figure 1.
Part number: M27/131-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, SG
Navy - EC, SH, OS
Air Force - 11, 17, 99

User activities:
Army - MU, WC, SG, ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5950-0523-4)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:35Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-T-27/131 TRANSFORMER, POWER, STEPDOWN, TFLT03YY950

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:35Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: XXXXXXXX DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:35Z
Check the source to verify that this is the current version before use.