
MILITARY SPECIFICATION SHEET


TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR, POWER TF5SO4ZZ


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the inductor described herein shall consist of this specification and the latest issue of MIL-T-27.

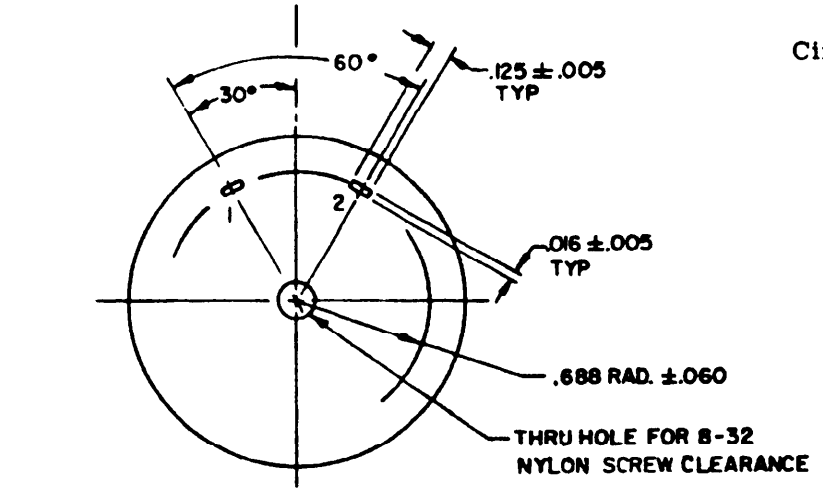

Circuit diagram and marking

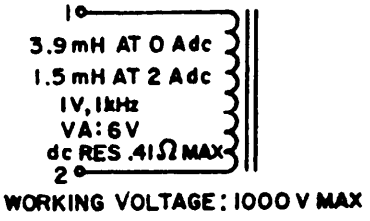

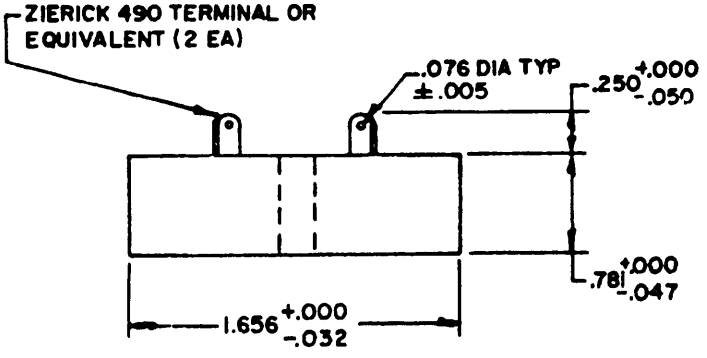

INCHES	MM
.005	.13
.016	.41
.032	.81
.047	1.19
.050	1.27
.060	1.52
.076	1.93
.125	3.18
.250	6.35
.688	17.48
.781	19.84
1.656	42.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Tolerance on terminal angular position is ±0.5°.
4. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configuration.

Ⓑ Denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:31Z
Check the source to verify that this is the current version before use.

FSC 5950

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the windin extreme terminals of the winding.)

Electrical ratings:

(B) Inductance (1-2): 3.9 mH minimum at 0 ampere dc and 1.5 mH minimum at 2.0 amperes dc.

Voltage (1-2): 1.0 volt, 1.0 kHz.

DC resistance (1-2): 0.41 ohm maximum.

Working voltage: 1000 volts maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Weight: 3.8 ounces.

Terminals: Brass, solder type.

Operating temperature range: -40°C to +155°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2.0 pounds.

Dielectric withstanding voltage:

At sea level: 1500 Vrms.

At reduced barometric pressure: 1250 Vrms.

Electrical characteristics:

(B) Inductance:

With 1.0 Vrms, 1.0 kHz across (1-2), and 0 ampere dc applied to (1-2), the inductance 3.9 mH minimum.

With 1.0 Vrms, 1.0 kHz across (1-2), and 2.0 amperes dc applied to (1-2), the inducta be 1.5 mH minimum.

Temperature rise: 60°C, maximum with 1.0 Vrms, 1 kHz, 2.0 amperes dc applied to (1-2) at temperature of 95°C.

Vibration, high frequency: MIL-STD-202, method 204, test condition A.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Marking location: See figure 1.

Part number: M27/98-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - FS

User activities:
Army - AR, WC, ME
Navy - MC, AS
Air Force - 19

Agent:
DLA - ES

Preparing Army - ER (Project

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:31Z
Check the source to verify that this is the current version before use.