MILITARY SPECIFICATION SHEET

RELAYS, HYBRID, SENSORS, ESTABLISHED RELIABILITY, TYPE I, CLASS B, (HYBRID AC POWER MONITORING SENSOR), 2PDT, LOW LEVEL TO 10 AMPERES, HERMETICALLY SEALED (POTTED), HORIZONTAL MOUNT WITH CONNECTOR TERMINATION

This amendment forms a part of MIL-R-28894/4, dated 10 April 1986, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Figure 1, delete circuit diagram in its entirety and substitute new circuit diagram below.

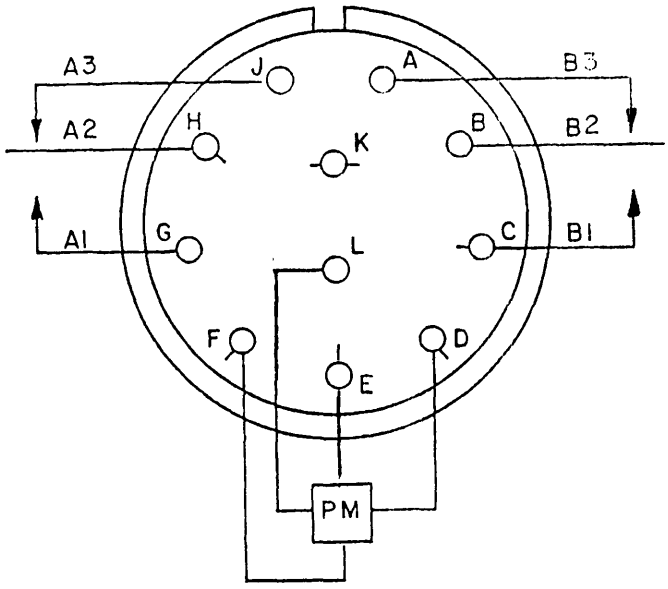

CIRCUIT DIAGRAM TERMINAL VIEW

Delete notes 4 and 6 in their entirety and substitute:

"4. Terminal K is a non-functional lead."

"6. Receptacle connector, hermetic, boyonet coupling, solder-mounting per MS3113, part number 3113H18C11P."

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:47Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy - OS, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5945-0741-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:47Z
Check the source to verify that this is the current version before use.