INCH-POUND

MIL-DTL-52525/16C
30 June 1998
SUPERSEDING
MIL-F-52525/16B
30 June 1987

DETAIL SPECIFICATION SHEET

FITTINGS, CLAMP-HALVES, FOR 4-BOLT SPLIT-FLANGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52525.

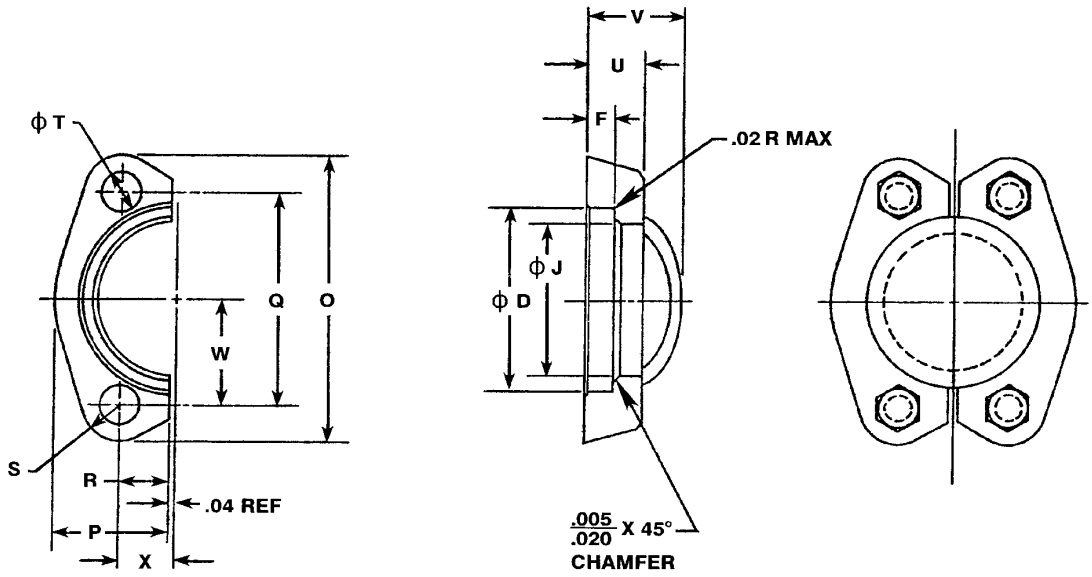

NOTE:
1. D AND J TO BE CONCENTRIC WITHIN .010 FIM

FIGURE 1. Clamp-half: hydraulic, 4-bolt split-flange type.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for standard service split-flange clamp halves. 1/

Part number	Flange size	D ±0.010	F ±0.005	J ±0.010	O	
					max	min
M52525/16-8	1/2	1.219	0.245	0.955	2.16	2.09
M52525/16-12	3/4	1.531	0.245	1.265	2.59	2.53
M52525/16-16	1	1.781	0.295	1.515	2.78	2.72
M52525/16-20	1-1/4	2.031	0.295	1.720	3.16	3.09
M52525/16-24	1-1/2	2.406	0.295	2.000	3.72	3.66
M52525/16-32	2	2.844	0.355	2.470	4.06	3.94
M52525/16-40	2-1/2	3.344	0.355	2.950	4.56	4.44
M52525/16-48	3	4.031	0.355	3.580	5.38	5.25
M52525/16-56	3-1/2	4.531	0.422	4.030	6.06	5.94
M52525/16-64	4	5.031	0.422	4.530	6.44	6.31

1/ All dimensions not shown shall conform to SAE J516.

TABLE I. Dimensions for standard service split-flange clamp halves - Continued. 1/

Part number	P ±0.030	Q ±0.010	R	S	T ±0.010
M52525/16-8	0.86	1.500	0.31	0.31	0.344
M52525/16-12	0.98	1.875	0.40	0.34	0.406
M52525/16-16	1.11	2.062	0.48	0.34	0.406
M52525/16-20	1.39	2.312	0.56	0.41	0.469
M52525/16-24	1.58	2.750	0.67	0.47	0.531
M52525/16-32	1.86	3.062	0.81	0.47	0.531
M52525/16-40	2.09	3.500	0.96	0.50	0.531
M52525/16-48	2.53	4.188	1.18	0.56	0.656
M52525/16-56	2.70	4.750	1.34	0.62	0.656
M52525/16-64	2.95	5.125	1.49	0.62	0.656

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for standard service split-flange clamp halves - Continued. 1/

Part number	U	V	W ±0.010	X ±0.010
M52525/16-8	0.50	0.75	0.750	0.344
M52525/16-12	0.56	0.88	0.938	0.438
M52525/16-16	0.62	0.94	1.031	0.515
M52525/16-20	0.56	0.88	1.156	0.594
M52525/16-24	0.62	1.00	1.375	0.703
M52525/16-32	0.62	1.03	1.531	0.844
M52525/16-40	0.75	1.50	1.750	1.000
M52525/16-48	0.88	1.62	2.094	1.219
M52525/16-56	0.88	1.12	2.375	1.375
M52525/16-64	1.00	1.38	2.562	1.531

1/ All dimensions not shown shall conform to SAE J516.

TABLE II. Maximum operating pressures for clamp-halves.

Part number	PSI
M52525/16-8	5000
M52525/16-12	5000
M52525/16-16	5000
M52525/16-20	4000
M52525/16-24	3000
M52525/16-32	3000
M52525/16-40	2500
M52525/16-48	2000
M52525/16-56	500
M52525/16-64	500

REQUIREMENTS:

1. Fittings shall be in accordance with figure 1 and tables I and II.

2. Materials and finishes shall be as specified in MIL-DTL-52525.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

3. Marking shall include the manufacturer's name or trademark, size, and hose identifier R10. Location of marking is optional.

NOTES:

1. Dimensions are in inches.

2. Part number.

Example of a Military part number: M52525/16-8



CONCLUDING MATERIAL

Custodian:
Army - AT
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0859-16)

Review activities:
Air Force - 82
Army - AR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.