INCH-POUND

MIL-DTL-52525/17B
30 June 1998
SUPERSEDING
MIL-F-52525/17A
30 June 1987

DETAIL SPECIFICATION SHEET

FITTINGS, CLAMP-HALVES, FLANGE TO PORT, FOR 4-BOLT SPLIT-FLANGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52525.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

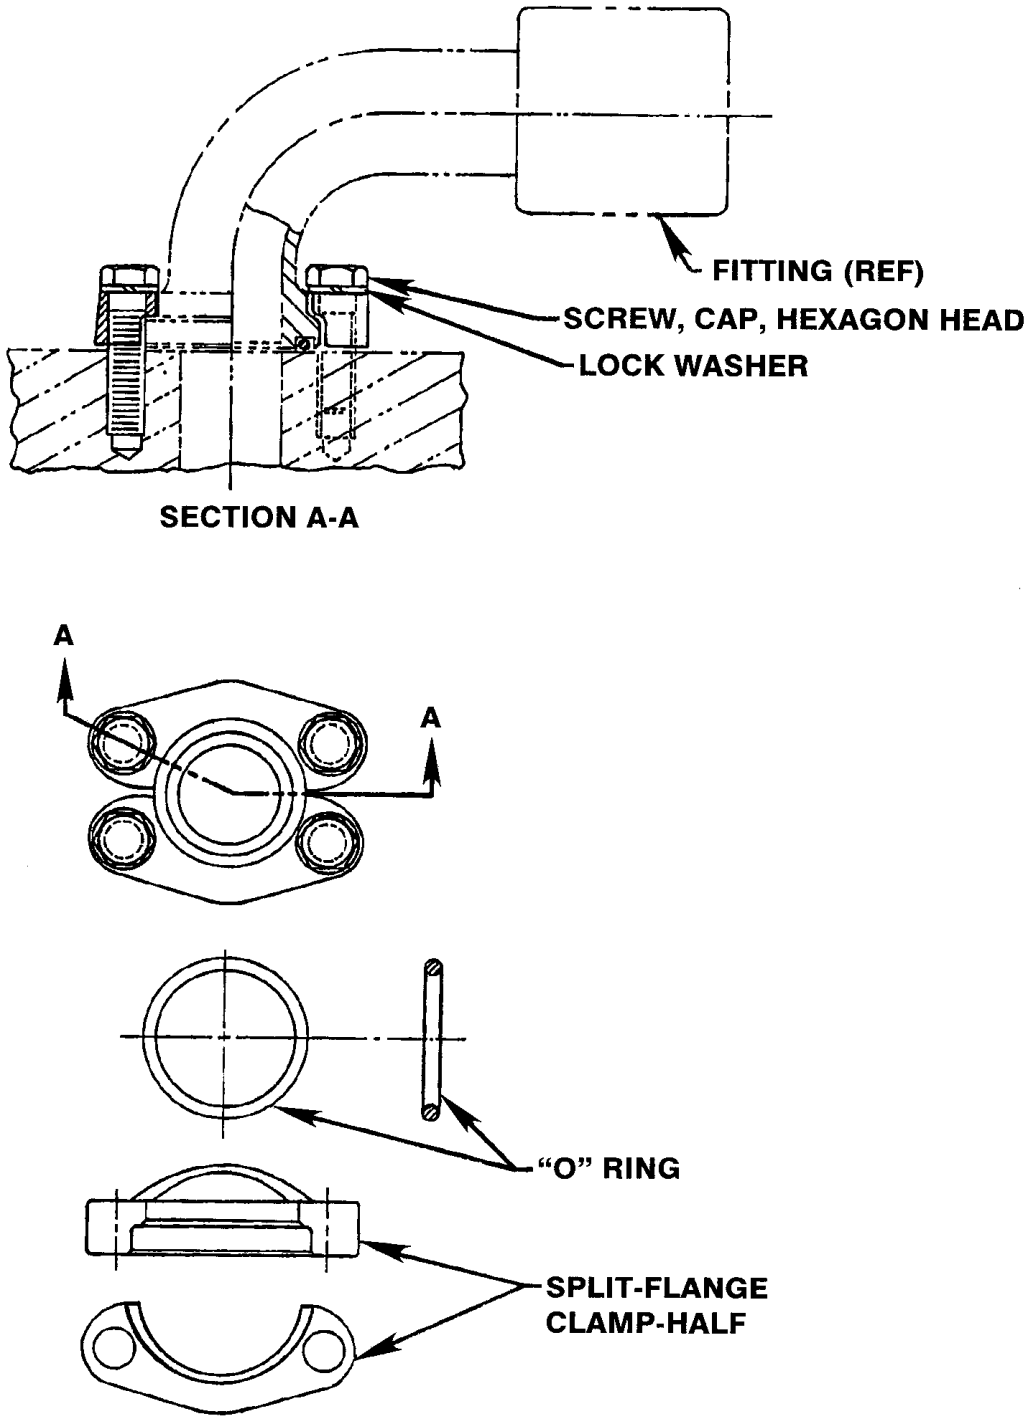

FIGURE 1. Connections: flange to port, 4-bolt split-flange type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Connecting units used with flange type.

Part number	Fitting	Screw cap hex head (4 required)	Washer, lock helical, split (4 required)	Gasket "O" ring (1 required)	Clamp half (2 required)
M52525/17-8	M52525/10-8-8	MS90725-36	MS35338-45	AN6227-15	M52525/16-8
	M52525/11-8-8				
	M52525/12-8-8				
M52525/17-12	M52525/10-12-12	MS90725-62	MS35338-46	AN6227-19	M52525/16-12
	M52525/11-12-12				
	M52525/12-12-12				
	M52525/13-12-12				
	M52525/14-12-12				
	M52525/15-12-12				
M52525/17-16	M52525/10-16-16	MS90725-62	MS35338-46	AN6227-24	M52525/16-16
	M52525/11-16-16				
	M52525/13-16-16				
	M52525/14-16-16				
	M52525/15-16-16				
	M52525/23-16-16				
	M52525/24-16-16				
	M52525/25-16-16				
M52525/17-20	M52525/10-16-20	MS90725-89	MS35338-47	AN6227-27	M52525/16-20
	M52525/10-20-20				
	M52525/11-16-20				
	M52525/11-20-20				
	M52525/12-16-20				
	M52525/12-20-20				
	M52525/13-20-20				
	M52525/14-20-20				
	M52525/15-20-20				
	M52525/23-20-20				
	M52525/24-20-20				
	M52525/25-20-20				
M52525/17-24	M52525/10-20-24	MS90725-113	MS35338-48	AN6230-3	M52525/16-24
	M52525/10-24-24				
	M52525/11-24-24				
	M52525/12-20-24				
	M52525/12-24-24				
	M52525/13-24-24				
	M52525/14-24-24				
	M52525/15-24-24				
	M52525/23-24-24				
	M52525/24-24-24				
	M52525/25-24-24				
M52525/17-32	M52525/10-24-32	MS90725-113	MS35338-48	AN6230-6	M52525/16-32
	M52525/10-32-32				
	M52525/11-32-32				
	M52525/12-32-32				
	M52525/23-32-32				
	M52525/24-32-32				
	M52525/25-32-32				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Fittings shall be in accordance with figure 1 and tables I and II.

2. Materials and finishes shall be as specified in MIL-DTL-52525.

3. The “O” ring shall have a durometer hardness of 90 ±5.

NOTES:

1. Part number.

Example of a Military part number: M52525/16-8

M52525/16 -8

Specification sheet number
Size dash number for the connecting unit (see table I)

CONCLUDING MATERIAL

Custodian:
Army - AT
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0859-17)

Review activities:
Air Force - 82
Army -AR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.