INCH-POUND

MIL-DTL-52525/1B
30 June 1998
SUPERSEDING
MIL-F-52525/1A
30 June 1987

DETAIL SPECIFICATION SHEET

FITTINGS, HOSE, SCREW-ON TO 37° FLARE FEMALE SWIVEL, STRAIGHT, TYPE 100R2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52525. The fittings described herein are for use with MIL-DTL-52471, type 100R2 double wire braid hose.

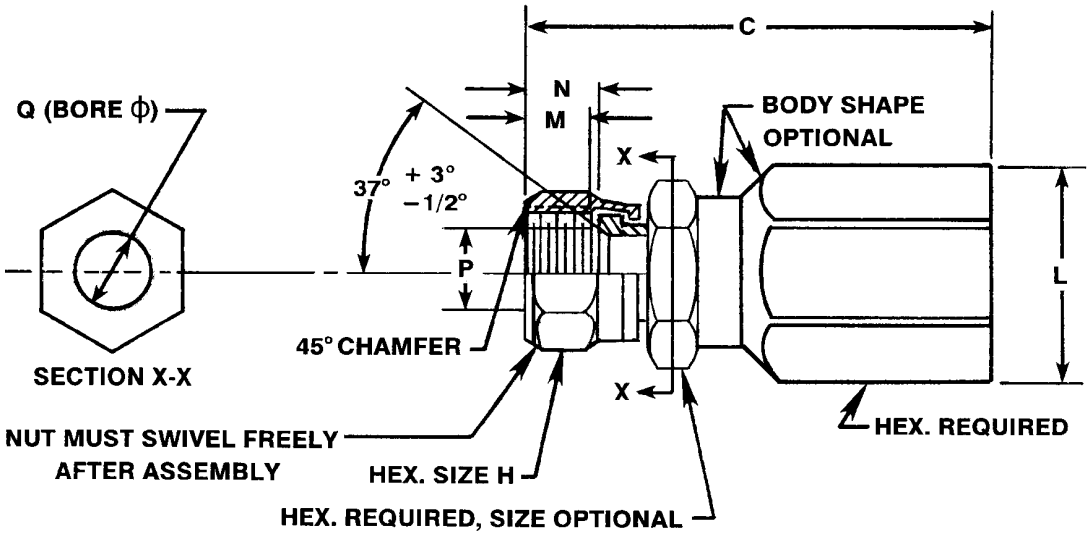

FIGURE 1. Fitting, screw-on to 37° flare female swivel, straight.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R2 fittings. 1/

Part number	Hose dash no.	Hose I.D.	Tube dash no.	Tube O.D.	Thread size	C Maximum	H Hex size	L Maximum
M52525/1-4-4	4	1/4	4	1/4	7/16-20	2.88	9/16	0.89
M52525/1-4-5	4	1/4	5	5/16	1/2-20	2.94	5/8	1.00
M52525/1-6-6	6	3/8	6	3/8	9/16-18	3.16	11/16	1.19
M52525/1-8-8	8	1/2	8	1/2	3/4-16	3.33	7/8	1.24
M52525/1-8-10	8	1/2	10	5/8	7/8-14	3.38	1	1.24
M52525/1-12-12	12	3/4	12	3/4	1-1/16-12	4.08	1-1/4	1.75
M52525/1-16-16	16	1	16	1	1-5/16-12	4.54	1-1/2	2.05
M52525/1-20-20	20	1-1/4	20	1-1/4	1-5/8-12	5.47	2	2.63
M52525/1-24-24	24	1-1/2	24	1-1/2	1-7/8-12	5.85	2-1/4	2.94
M52525/1-32-32	32	2	32	2	2-1/2-12	6.53	2-7/8	3.50

1/ Dimensions not shown shall conform to SAE J516.

TABLE I. Dimensions for type 100R2 fittings - Continued. 1/

Part number	M Minimum	N +0.030 -0.015	P ±0.005	Q Minimum
M52525/1-4-4	0.300	0.344	0.295	0.11
M52525/1-4-5	0.331	0.375	0.355	0.11
M52525/1-6-6	0.333	0.375	0.435	0.26
M52525/1-8-8	0.375	0.422	0.570	0.375
M52525/1-8-10	0.461	0.500	0.680	0.375
M52525/1-12-12	0.469	0.562	0.850	0.57
M52525/1-16-16	0.563	0.594	1.100	0.78
M52525/1-20-20	0.563	0.625	1.410	1.01
M52525/1-24-24	0.661	0.734	1.625	1.25
M52525/1-32-32	0.844	0.938	2.240	1.72

1/ Dimensions not shown shall conform to SAE J516.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE II. Maximum operating pressures of fittings.

Hose I.D.	PSI
1/4	5000
5/16	4250
3/8	4000
1/2	3500
5/8	2750
3/4	2250
1	2000
1-1/4	1625
1-1/2	1250
2	1125

TABLE III. Over-tightening torque for swivel nut.

Tube O.D.	Torque
	inch pounds (in-lb)
1/4	135
5/16	180
3/8	270
1/2	450
5/8	650
3/4	900
1	1200
1-1/4	1900
1-1/2	2700
2	4000

REQUIREMENTS:

1. Fittings shall be accordance with figure 1, and tables I, II, and III.

2. Materials and finishes shall be as specified in MIL-DTL-52525.

3. Marking shall include the manufacturer’s name or trademark, size, and hose identifier R2. Location of marking is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.

2. Part number.

Example of a Military part number: M52525/1-8-8

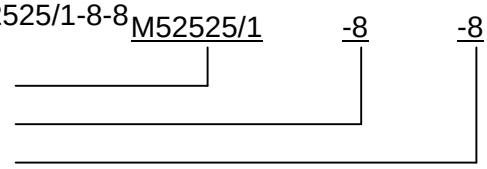

CONCLUDING MATERIAL

Custodian:
Army - AT
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0859-01)

Review activities:
Air Force - 82
Army - AR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.