FF-H-106/1
July 19, 1974


FEDERAL SPECIFICATION SHEET

FEDERAL SPECIFICATION

HARDWARE, BUILDERS'; LOCKS AND DOOR TRIM:
CYLINDER ENTRANCE DOOR LOCK TYPE 121A and 122A

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal Agencies.

The complete requirements for procuring the lock described herein shall consist of this document and the issue in effect of Specification FF-H-106/GEN.





420
PLAIN




420 M
MODERN




421
ROUND OR OVAL



356 T

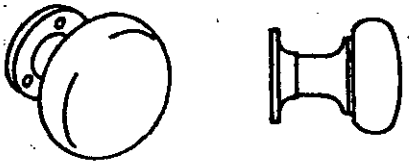

202
PLAIN

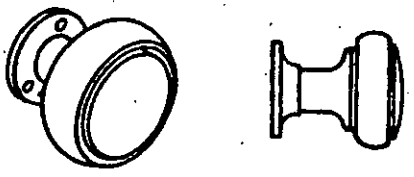

203 M
MODERN

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
Description, dimensions, operation, and trim choices:
See above figure.

Description: Type 121A. Handle outside and knob inside; for doors 1-3/4" thick. One cylinder, turn knob and stopworks.

Type 122A. Handle outside and knob inside; for entrance doors 1-3/4" thick and over. One cylinder, turn knob and stopworks.

Dimensions:

Type 121A. Case 5-1/4" x 3-1/2" x 5/8"
Backset 2-1/2" to 2-3/4" ± 1/32"
Front 7-5/8" x 7/8" flat
Latchbolt 27/32" x 19/32" with 1/2" minimum throw
Deadbolt 1-1/8" x 7/16" or at least equivalent cross section with 1/2" minimum throw.

Type 122A. Case 5-1/4" x 3-1/2" x 3/4"
Backset 2-3/4" ± 1/32"
Front 8" x 1-1/4"
Latchbolt 7/8" x 5/8" with 1/2" minimum throw
Deadbolt 1-1/8" x 1/2" or at least equivalent cross section with 1/2" minimum throw.

Operation:

Latch bolt by thumbpiece outside and by knob inside. Thumbpiece is locked by stopworks on lock face. When thumbpiece is locked, latch bolt and deadbolt by key from outside and deadbolt by locking device on inner side.

Trim choice:

No. 18 trim. Modern design. One cast bronze sectional handle with cylinder collar, type 420M. One knob with rose, type 203M; wrought bronze. One turn knob, type 356T.

No. 19 trim. Plain design rectangular pattern. One cast bronze sectional handle with cylinder collar, type 420. One knob with rose, type 202; wrought bronze. One turn knob, type 356T.

No. 20 trim. Plain design, round or oval pattern. One cast bronze sectional handle with cylinder collar, type 421. One knob with rose, type 202; wrought bronze. One turn knob, type 356T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Trim description:

Type 202 and 203M. Wrought bronze knob and shank. Knob diameter 1-7/8" to 2-1/4". Each pair of knobs with 1/4" to 5/16" steel spindle to suit lock, and with two wrought roses 2" minimum diameter. When furnished for lock with split hub, outside knob not removable from outside wi door is locked.

Type 356T. Wrought bronze oval plate. 1-5/8" x 1-1/8" approximate, with turn knob on 1/8" to 1/4" steel spindle.

Type 420 and 420M. Cast bronze with rounded, beveled, or square corners and edges on plates. Cylinder collar, approximately 2-1/4" x 2-1/4". Grip approximately 5-3/4" center to center, with two machine screws and washers for fastening handle through door. Thumbpiece to suit lock.

Type 421. Round or oval pattern, otherwise same as type 420.

MILITARY CUSTODIANS:
Army - WC
Navy - YD
Air Force - 82

Review activity:
DSA - IS

User activity:
Army - ME

Preparing activity:
Navy - YD

Civil Agency Coordinating Activity:
VA - DMS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain copies and other documents referenced herein. Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.