FF-H-106/2
July 19, 1974


FEDERAL SPECIFICATION SHEET


FEDERAL SPECIFICATION

HARDWARE, BUILDERS'; LOCKS AND DOOR TRIM: CYLINDER ENTRANCE DOOR LOCK TYPE 123A and 123B

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration for use of all Federal Agencies.

The complete requirements for procuring the lock described herein shall consist of this document and the issue in effect of Specification FF-H-106/GEN.



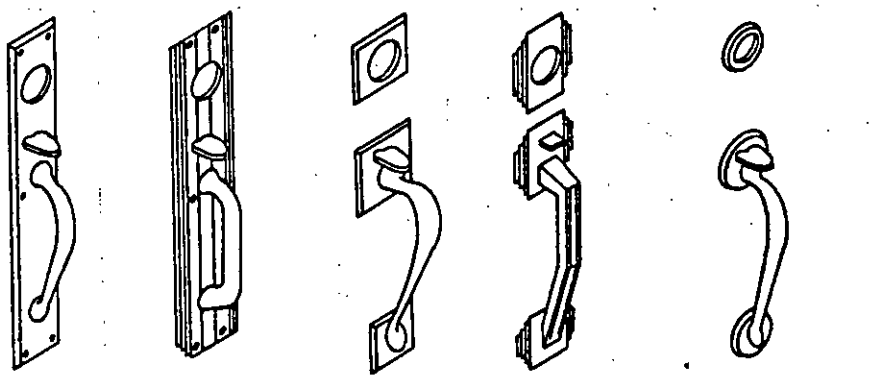

410, 415 PLAIN | 410 M, 415 M MODERN | 420 PLAIN | 420 M MODERN | 421 ROUND OR OVAL

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
Description, dimensions, operation, and trim choices:
See above figure.

Description:

Type 123A. Handle both sides; for entrance doors 1-3/4" thick and over; two cylinders.

Type 123B. Handle both sides; for entrance doors 1-3/4" thick and over; two cylinders, deadlocking latch, no deadbolt.

Dimensions:

Case 5-1/4" x 3-1/2" x 3/4"
Backset 2-3/4" ± 1/32"
Front 7-3/4" x 1-1/4" flat
Latchbolt 1" x 5/8" with 1/2" minimum throw.
Deadbolt 1-1/8" x 1/2" or at least equivalent cross section, with 1/2" minimum throw.

Operation:

Type 123A. Latch bolt by thumbpiece from either side at all times. Deadbolt by key from either side.

Type 123B. Latch bolt by thumbpiece from either side. Stopworks controlled by inside cylinder. Latch bolt by key from outside when outside thumbpiece is locked by stopworks. When door is closed, auxiliary bolt shall deadlock latchbolt against end pressure.

Trim choice:

No. 21 trim. Modern design. Two handles, type 410M.
No. 22 trim. Plain design. Two handles, type 410.
No. 23 trim. Modern design. Two sectional handles, type 420M.
No. 24 trim. Plain design. Rectangular pattern. Two sectional handles, type 420.
No. 25 trim. Plain design. Round or oval pattern. Two sectional handles, type 421.
No. 26 trim. Plain design. Two handles, type 415.
No. 27 trim. Modern design. Two handles, type 415M.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Trim description:

Types 410 and 410M. Cast bronze. Rounded, beveled, or square corners and edges. Plate 14" x 3" minimum. Cast bronze grip approximately 5" center to center, and thumbpiece. Cut to suit lock. Two machine screws with washers for fastening handle through door.

Types 415 and 415M. Wrought bronze plate. Rounded, beveled or square corners and edges. Plate 14" x 3" minimum, 0.040" thick minimum. Cast bronze grip approximately 5" center to center, and thumbpiece. Cut to suit lock. Two machine screws and washers for fastening handle through door.

Type 420 and 420M. Cast bronze with rounded, beveled, or square corners and edges on plates. Cylinder collar, approximately 2-1/4" x 2-1/4". Grip approximately 5-3/4" center to center, with two machine screws and washers for fastening handle through door. Thumbpiece to suit lock.

Type 421. Round or oval pattern, otherwise same as type 420.

MILITARY CUSTODIANS:
Army - WC
Navy - YD
Air Force - 82

Preparing activity:
Navy - YD

Civil Agency Coordinating Activity:
VA - DMS

Review activity:
DSA - IS

User activity:
Army - ME

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain copies and other documents referenced herein. Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:44Z
Check the source to verify that this is the currentversion before use.