INCH-POUND

A-A-55076
26 August 1992

COMMERCIAL ITEM DESCRIPTION

OVERSHOES, WOMEN'S, PLASTIC, GRAY

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-O-41838.

Abstract. This document covers the requirements for a vinyl plastic women's overshoe. The overshoes are intended for use by female military personnel of the Department of Defense.

Salient Characteristics. The overshoe shall be of the pull-on, vinyl plastic boot type with a button and loop fastening closure (see Figure 1). The overall outside surface shall be of a texture or grain design which creates a matte or dull finish. The sole tread shall be the contractor's design. The tread design shall be no more than 50 percent of the total thickness in any area of the sole. The color of the finished vinyl overshoe shall be gray approximately matching color No. 36118 of FED-STD-595 or the color may be smoke. The overshoe shall be slush molded using a vinyl chloride plastisol. The molds shall be provided by the contractor. The completed overshoe shall be coated on the inside with a slip finish for easy donning and doffing. The outer surface shall be sprayed with a clear vinyl acrylic lacquer so as to produce a matte or dull appearance. The overshoe shall not have any tacky or sticky areas. One button shall be placed on the inner overshoe side at least 1/2 inch from the top and at least 1/2 inch from the front center line, to form a fold-over of the front towards the outside from the top. One

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8435

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

button shall be placed on the outer overshoe side approximately at the ankle position. The fastening of the loop over the buttons shall create a neat fold-over of the forward section of the overshoe over the instep. The button positions shall be marked for each size according to the best commercial grading practice.

Material. The vinyl molding compound shall consist of vinyl resins, plasticizers, and stabilizers which are suitable for slush molding overshoes which conform to the requirements contained in this document. The button assembly shall be the manufacturer's commercial standard. If the button assembly shown in section A-A of Figure 1 is used, a washer shall be required. The color of the buttons shall be clear, black, or approximately match the color of the overshoe. The "figure 8" fastening loop shall consist of a nylon braid with an elastic core and a corrosion resistant metal clip suitable for forming around the braid without fracturing. The fastening loop shall be of such dimension as to assure proper closure of the overshoe. The small end of the "figure 8" fastening loop shall have a maximum diameter of 3/16 inch to assure retention on the button. The fastening loop shall be attached by looping the short end over the top button. The braid shall be a woven casing of nylon yarn with a width of 1/8 inch plus or minus 1/32 of an inch. The braid shall have a minimum breaking strength of 18.0 pounds. The clip shall be constructed of brass or steel of a hardness and thickness suitable for complete forming around the braid without fracturing. Steel clips, if used, shall be plated with nickel or coated with gray enamel.

Sizes. The overshoes shall be provided in the following sizes:

4, 5, 6, 7, 8, 9, 10, 11, 12

Label. The size, in numerals 1/4 to 1/2 inch in height, shall be embossed or branded in the shank area. In addition, the contractor's name or identification symbol shall be embossed or branded in the shank area with characters not less than 1/4 inch in height. As an alternative, the contractor's name or identification symbol may be printed with black or white water resistant ink and shall be located on the inside of the upper forepart below the button fastener loop. The height of the characters shall be as specified above.

Sizes and Measurements. The dimensions (measurements and contours) shall conform to the measurements as detailed in Figure 2 for the size 7 overshoe. The height measurement for the size 7 overshoe shall be between 7 and 7-1/2 inches measured at the back of overshoe from the inside heel seat upwards to the top back center. For all other sizes, grading shall be employed as detailed in Figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Workmanship. After completion, the finished overshoe shall be thoroughly cleaned and all foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model shall consist of units independently developed. Product Demonstration Models shall be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models shall be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract shall serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with this Commercial Item Description.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Lots of overshoes shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL 6.5. The sample unit is one overshoe.

Dimensional Examination. The finished overshoe shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one overshoe; the inspection level shall be S-3 and the AQL shall be 6.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5.

Source: https://assist.dla.mil Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Examination	Defect
Material	Missing, damaged, not as required.
Content	Number of overshoes per shipping container is more or less than required.

Defects. The overshoe shall be examined for the following defects: pairs not properly mated, i.e., not right and left of same size; variation in color between pair; variation in height of pair over 1/4 inch; any spot or stain seriously affecting appearance; any embedded foreign matter not readily removed without leaving a thin spot; any characteristic not in accordance with specified requirements; not one piece without seams; color not uniform or not as specified; outside finish not as specified; finish tacky or sticky; loop cut or frayed; clip missing, mispositioned, or not securely attached; any hole (including pinhole), cut tear, rupture, or crack; any blister, weak or thin spot, or bubble, affecting serviceability; any part of button assembly not securely affixed, malformed, broken, missing, or otherwise defective, affecting serviceability; overshoe malformed; marking, identification and size missing, illegible, misplaced, or incorrect; measurement of item not as specified.

End Item Performance Testing.

Physical Determination. The tensile strength, elongation at break, and tensile stress (modulus) at 100 percent elongation shall be determined on the same specimens using ASTM-D-638. The following exceptions shall apply: The sample length shall be 4-3/8 inches, the width in the narrowest portion shall be 0.25 inch, the gauge length shall be 1 inch and the testing instrument shall operate at 12 inches per minute. The requirements are listed in Table I below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Table I. Physical Determination

Characteristics	Determinations per sample unit	Requirements	Results reported to:
Tensile strength minimum	3	1000 psi	nearest 10 psi
Elongation at break, minimum	3	225 percent	nearest 1 percent
Tensile stress (modulus) at 100 percent elongation, minimum	3	320 psi	nearest 10 psi

Tear Resistance. The tear resistance shall be tested as specified in ASTM-D-695. Three determinations per sample unit shall be made. The tear resistance shall be a minimum of 100 pounds per inch of thickness, reported to the nearest 1 pound per inch of thickness.

Durometer Hardness. The durometer hardness shall be measured as specified in ASTM-D-2440. Three determinations per sample unit shall be made. The durometer hardness shall be a maximum of 67, reported to the nearest whole number.

Thickness. The thickness of the finished overshoe shall conform to the requirements in Table II below.

Table II. Overshoe Thickness

Location	Minimum thickness
Upper (1 inch down from top, center of side)	0.025 inches
Heel (directly above sole binding, in upper area)	0.050 inches
Sole (toe)	0.055 inches
Sole (ball)	0.055 inches
Sole (extreme heel)	0.125 inches

Cracking. The overshoe sole shall be folded across the ball from side to side and then folded back so that the edges are together. A drop of acetone shall be ejected from a dropper onto the fold ridge and allowed to stand for approximately 5 seconds. The sole shall be examined for evidence of cracking. One determination per sample unit shall be made. There shall be no evidence of cracking. The results shall be reported as "pass" or "fail".

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

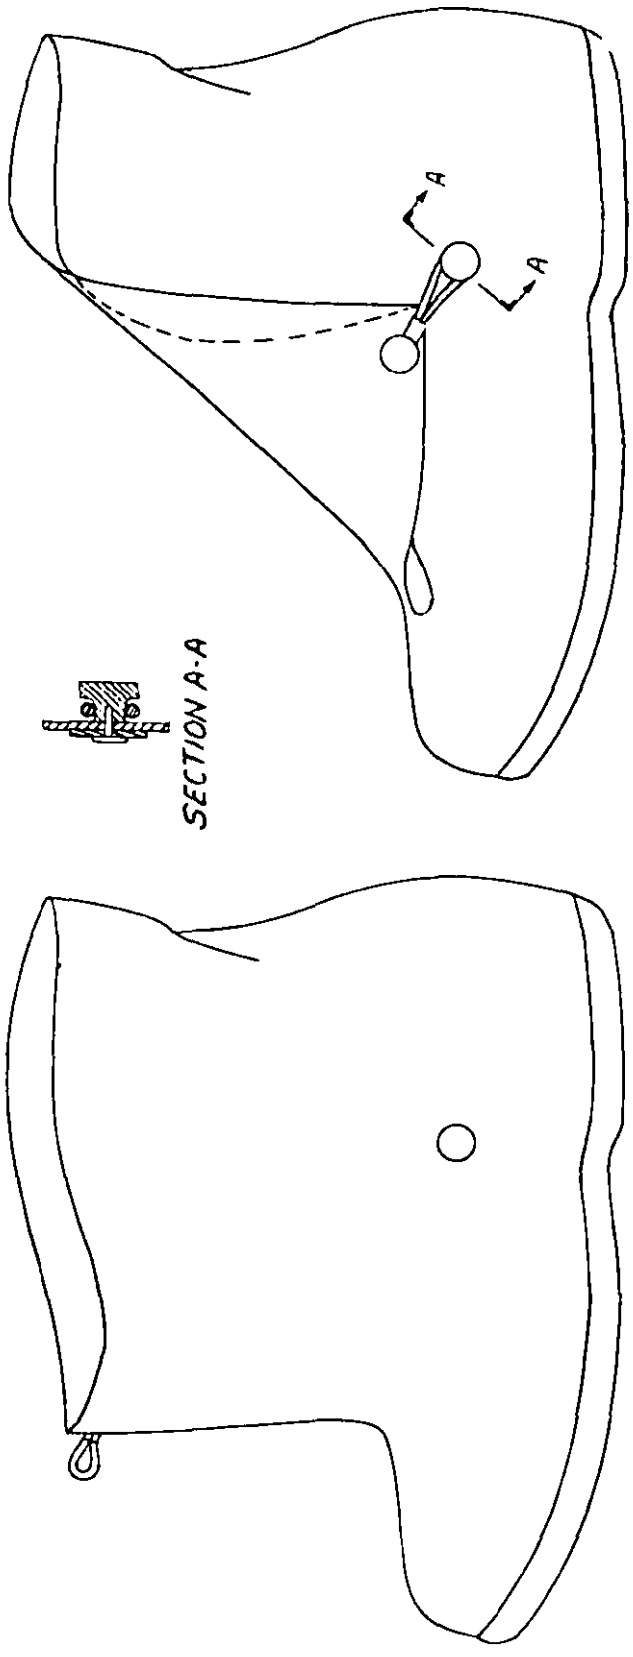


FIG. 1 - OVERSHOE, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodians:
Army-GL
Navy-NU
Air Force-11

Review Activities:
Navy-MC
Air Force-99, 82

User Activity:
Air Force-45

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8435-0058

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Leakage. Each overshoe to be tested shall be immersed in water to within 1/2 ± 1/8 inch of the lower fastening button. The immersed overshoe shall remain in the water for a sufficient length of time to insure that no leaks occur when the inside of the overshoe is examined for visible penetration of water. Examination for water penetration may be made by the use of a suitable mechanical or electronic device. One determination per sample unit shall be made. There shall be no evidence of leakage. The results shall be reported as "pass" or "fail".

PACKAGING

Overseas.

Packaging. Each overshoe shall be separated from its mate by tissue paper. Each pair shall be packaged in a plastic bag.

Packing. Twenty-four pairs of overshoes shall be packed in a fiberboard box conforming to style RSC-L, grade 275 of PPP-B-636. The box shall be closed in accordance with the appendix of PPP-B-636.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-129.

Domestic.

Packaging, Packing, Palletization and Marking. Packaging, packing, palletization and marking shall be in accordance with ASTM D 3951.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

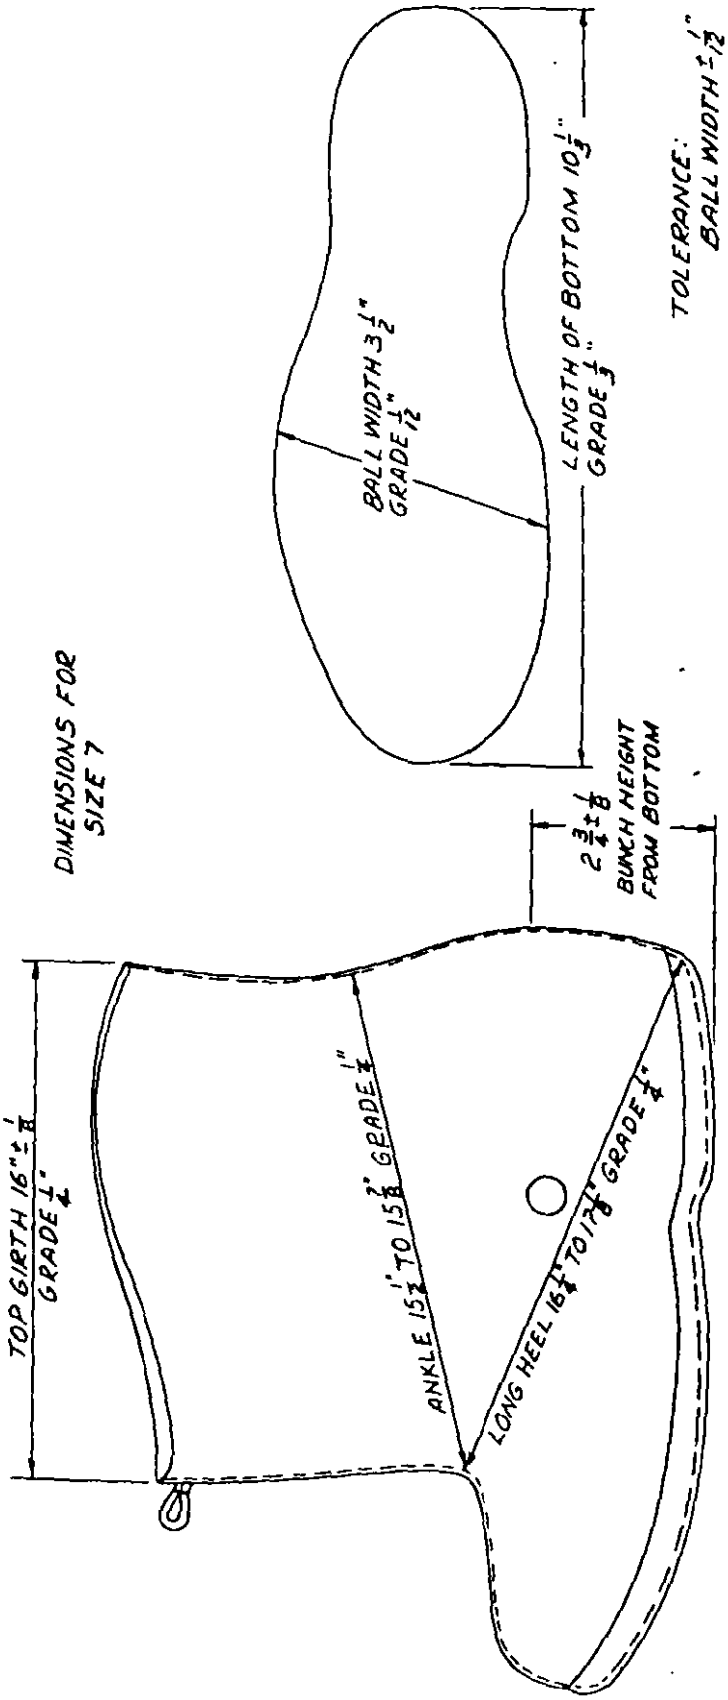


FIG 2. OVERSHOE, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55076	2. DOCUMENT DATE (YYMMDD) 92-08-26

3. DOCUMENT TITLE
Overshoes, Women's, Plastic, Gray

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DLA-CT	b. TELEPHONE (Include Area Code) (1) Commercial (215)737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.