[INCH-POUND]
A-A-55089A
23 March 1992
SUPERSEDING
A-A-55089
20 September 1991

COMMERCIAL ITEM DESCRIPTION

CAPACITORS, FIXED, CERAMIC DIELECTRIC

The General Services Administration
has authorized the use of
this commercial item description.

1. Abstract. This commercial item description (CID) covers the general requirements for dipped monolithic, radial lead, Z5U ceramic dielectric capacitors.

1.1 Application. Capacitors covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements.

2. Part or Identifying Number (PIN). The PIN for the CID shall be as shown in the following example:

A-A-55089	-	01	Z	A
CID number		Dash number (See table I)	Capacitance tolerance (See 3.2 and table I)	Case code (see figure 1 and table I)

3. Salient characteristics.

3.1 Capacitance value. The capacitance range shall be 1,000 pF to 2,200,000 pF. Specific capacitance values are specified in table I by dash number.

3.2 Capacitance tolerance. Capacitors are available in tolerances ±20 percent (M), +80 percent, -20 percent (Z).

3.3 Rated voltage. See table I.

3.4 Operating temperature. The operating temperature range shall be from +10°C to +85°C.

3.5 Temperature coefficient. The temperature coefficient shall be +20 percent, -56 percent (Z5U), over the temperature range +10°C to +85°C.


3.6 Design and construction. Capacitors supplied to this CID shall be as specified herein (see figure 1).

3.7 Marking. Capacitors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

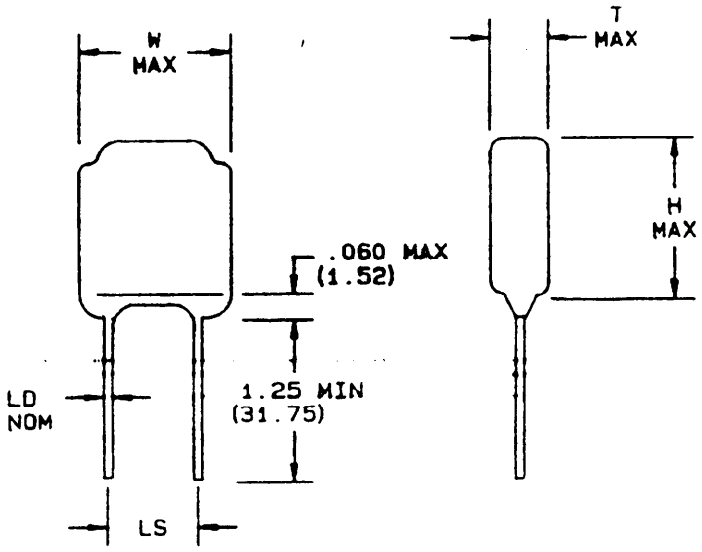

Case code	A	B	C	D
Width (W)	.150 (3.81)	.200 (5.08)	.300 (7.62)	.500 (12.70)
Height (H)	.150 (3.81)	.200 (5.08)	.300 (7.62)	.500 (12.70)
Thickness (T)	.100 (2.54)	.125 (3.18)	.150 (3.81)	.200 (5.08)
Lead spacing (L.S.) ±.031 (0.79) Ⓐ	.100 (2.54)	.100 (2.54)	.200 (5.08)	.400 (10.16)
Lead diameter (L.D.) ±.002 (0.05) Ⓐ	.020 (0.51)	.020 (0.51)	.020 (0.51)	.025 (0.64)

NOTES:
1. Dimensions are inches.
2. Metric equivalents are given for general information.
3. Millimeters are in parentheses.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Cap (pF)	Cap tol	Voltage	Case code
-01	1,000	Z	50	A
-02	10,000	M	50	A
-03	22,000	M	50	A
-04	4,700	M	50	A
-05	10,000	M	100	B
-06	100,000	M	100	B
-07	15,000	M	100	B
-08	22,000	M	100	B
-09	33,000	M	100	B
-10	68,000	M	100	B
-11	10,000	Z	50	B
-12	100,000	M	50	B
-13	220,000	M	50	B
-14	2,200,000	M	25	C
-15	2,000,000	M	50	C
-16	2,200,000	Z	50	C
-17	220,000	Z	200	C
-18	2,200,000	M	100	D

4. Quality assurance provisions.

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspection, examination, and test requirements specified in the contract or purchase order. The contractor may use his own or any other facilities suitable for inspection requirements specified in the contract or purchase order, unless otherwise disapproved by the acquiring activity. The acquiring activity reserves the right to perform any of the inspections set forth in the contract or purchase order where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The acquiring activity reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.3 Certificate of compliance. A certificate of compliance shall accompany all capacitors supplied to this CID.

5. Packaging.

5.1 Packaging. Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

6. Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

6.1 Ordering data. The contract or purchase order shall specify the following:

a. CID document number and revision and CID part number.

b. Quality assurance provisions.

c. Packaging requirements.

6.2 Suggested sources of supply. A suggested source of supply is listed herein. Additional sources will be added as they become available.

Ⓐ Suggested sources of supply.

CID dash number (see table I)	Vendor A commercial PIN	Vendor A CAGE number	Vendor B commercial PIN	Vendor B CAGE number
A-A-55089-01	SR155E102ZAA	16299	C315C102Z5U5CA	31433
A-A-55089-02	SR155E103MAA	16299	C315C103M5U5CA	31433
A-A-55089-03	SR155E223MAA	16299	C315C223M5U5CA	31433
A-A-55089-04	SR155E472MAA	16299	C315C472M5U5CA	31433
A-A-55089-05	SR201E103MAA	16299	C320C103M1U5CA	31433
A-A-55089-06	SR201E104MAA	16299	C320C104M1U5CA	31433
A-A-55089-07	SR201E153MAA	16299	C320C153M1U5CA	31433
A-A-55089-08	SR201E223MAA	16299	C320C223M1U5CA	31433
A-A-55089-09	SR201E333MAA	16299	C320C333M1U5CA	31433
A-A-55089-10	SR201E683MAA	16299	C320C683M1U5CA	31433
A-A-55089-11	SR205E103ZAA	16299	C320C103Z5U5CA	31433
A-A-55089-12	SR205E104MAA	16299	C320C104M5U5CA	31433
A-A-55089-13	SE205E224MAA	16299	C320C224M5U5CA	31433
A-A-55089-14	SR402E225MAA	16299	---	---
A-A-55089-15	SR405E205MAA	16299	---	---
A-A-55089-16	SR405E225ZAA	16299	---	---
A-A-55089-17	SR406E224ZAA	16299	---	---
A-A-55089-18	SR501E225MAA	16299	C350C225M1U5CA	31433

Vendor	Vendor CAGE number	Vendor name and address
A	96095	Olean Advanced Products A Division of AVX Corporation 1002 Seneca Avenue Olean, NY 14760
B	31433	KEMET Electronics Corporation P. O. Box 5928 Greenville, SC 29606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Civil agency coordinating activity:
GSA - 7FXE

Preparing activity:
DLA-ES

(Project 5910-0466)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.