INCH-POUND

A-A-55091
25 February 1993

COMMERCIAL ITEM DESCRIPTION

SHIRT, MAN'S, POLYESTER AND WOOL, LONG SLEEVE

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-S-29149.

Abstract. This Commercial Item Description covers the requirements for a dark blue polyester/wool shirt. The shirts are intended for wear by male Navy personnel as part of the winter working blue uniform.

Classification. The shirts shall be of one type.

Salient Characteristics. The shirt shall have a six button front, turned back button stay, front plait, dress style shirt. The shirt shall have a superimposed yoke on a full back, collar, leaf, collar stand and two patch pockets with buttoned down flaps. The sleeves shall have a placket at the cuff opening with two buttons on each cuff for adjustment (see Figure 1). The pocket flaps shall have one buttonhole centered and 3/8 to 1/2 inch from the bottom edge of flap. The flap shall be edge stitched 3/16 to 1/4 inch from edges and the top of flap corners shall be tacked. The pocket depth at center shall finished 5-5/8 (± 1/8) inches and the finished width shall be 4-3/4 (+ 1/8) inches wide for sizes 12 to 14-1/2 and 6 (± 1/8) inches long and 5-1/4 (+ 1/8) inches wide for sizes 15-18. The inside left front pocket shall have a pencil pocket. The bottom of the pencil pocket shall be unhemmed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Figure. Figure is furnished for information purposes only. When inconsistencies exist between the written commercial item description and the figure, the written commercial item description shall govern.

Material.

Basic material. The basic material for the shirt shall be a washable tropical polyester and wool blend, shade Blue 3346 conforming to the requirements in Table I.

Table I. Requirements and test methods

Characteristics	Requirements	Test Method
Yarns per inch (minimum)		
Warp	50	ASTM-D 3775-85 Option C
Filling	44	ASTM-D 3775-85 Option C
Weight (ounces per yd, 56-inch width)	10.0 ± 0.5	ASTM-D 3776-85 Option C
Breaking strength (minimum (pounds)		
Warp	100	ASTM-D 5034-90 3/
Filling	80	ASTM-D 5034-90 3/
Tearing strength (minimum) (pounds)		
Warp	5.0	ASTM-D 1424-83
Filling	5.0	ASTM-D 1424-83
Shrinkage percent (maximum)		
Warp	3.0	2/
Filling	2.5	2/
Weave	Plain	Visual 1/

1/ One determination per sample unit and the results reported as "pass" or "fail".
2/ The test for dimensional stability shall be performed in accordance with AATCC TM 135, laundered on a Permanent Press Cycle (140 F^0) and tumble dried at 140 F^0 for five (5) complete cycles.

3/ One edge of the long dimension of the specimen shall be ravelled until a continuous yarn, the length of the specimen is obtained

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Interlining. The material used for interlining the left front plait, collarstand, collar, pocket flaps, and cuffs shall conform to the requirements of A-A-50135.

Thread. The thread for seaming, stitching, buttonholes, and button sewing shall be covered polyester-core thread, ticket No. 50, 2 ply and 70, 2 ply and shall conform to Type I of A-A-50199. The thread shall be dyed to match Black AA, Cable No. 66043. The finished thread shall show a minimum of "good" colorfastness to laundering, perspiration and light.

Buttons. The buttons shall be 25 line anchor insignia type and shall match shade Black, BT Cable No. 62001 and shall conform to class 1 of MIL-B-17143. The buttons shall be sew on to correspond with buttonholes placed as follows:

One button shall be centered in the right end of the collar stand with the center of the button 3/4 (± 1/8) inch from the end. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.

Five buttons shall be centered on the right front edge (button stay). The center of the buttons shall be 5/8 (± 1/8) inch from the edge. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.

One button shall be centered in each pocket to correspond with buttonhole in flap. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.

NOTE: The button shall be sewn through all plies of the pocket hem.

Two buttons shall be centered in each cuff with the center of the buttons 1/2 (± 1/8) inch and 1-1/2 (± 1/8) inches respectively from the end of the cuff. All stitches shall be in the button's grooves (vertical when worn) except for the cross-over stitch.

Collar stays. The collar stays shall be made from polyethylene terephthalate plastic sheet. The thickness shall be 0.010 (± 0.001) inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2-3/4 (± 1/16) inches in length when tested as specified in table II. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded. The stays shall be positioned so that on the finished shirt they are at a 25 to 30 degree angle from the front edge of the collar and the tapered ends are fitted into the collar points. The collar stays shall conform to the physical requirements in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Table II. Requirements and test methods

Component	Characteristic	Requirement	Test method
Collar stays	Width	Not less than 1/4 inch or more than 3/8 inch wide	Visual
	Length	2-3/4 (± 1/16)	Visual

Labels.

Personal/identification/instruction label. Each shirt shall have a combination personal/identification/instruction label with the information applied by either marking, direct printing, stamping or stenciling. The printing shall be white and show fastness to laundering. The label may also be a nonwoven, spunbonded polyester cloth or nonwoven, 80/20 polyester/cellulose cloth, impregnated, acrylic coated, mildew-resistant printed label, with black printing. Either label shall bear the following inscription:

NAME:
SERVICE NO:
NAME OF ITEM: SHIRT, MAN'S (POLYESTER AND WOOL LONG SLEEVE)
FIBER CONTENT: 75% POLYESTER 25% WOOL
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (IF OTHER THAN CONTRACTOR)

LAUNDERING INSTRUCTIONS

MACHINE WASH, PERMANENT PRESS CYCLE,
WARM WATER (120 DEGREES MAX.). DO NOT BLEACH,
TUMBLE DRY, MEDIUM HEAT, REMOVE IMMEDIATELY.
MAY ALSO BE DRY CLEANED.
OR
FOLLOW NAVEDTRA 414-01-45-81, FORMULA III

Size label. Each shirt shall have a size label. The inscription shall be as follows:

12 - 27 SL (Example)
STOCK NO. 8405-00-000-0000 (Example)

NOTE: The abbreviation for sleeve length shall be SL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 1/4 inch for regular seams and 1/2 inch for double-lapped and double-stitched seams and safety-stitched seams.

Sizes and Measurements. The finished shirts shall conform to the measurements below (See Figure 1). All measurements and tolerances are expressed in inches.

Sizes and finished measurements

Size	A Chest	B Length	C Collar stand
12	38	27-7/8	12-1/2
12-1/2	38-3/4	28-1/8	13
13	39-1/2	28-3/8	13-1/2
13-1/2	41	28-3/4	14
14	42-1/2	29-1/8	14-1/2
14-1/2	44	29-1/2	15
15	45-1/2	29-7/8	15-1/2
15-1/2	47	30-1/4	16
16	49	30-5/8	16-1/2
16-1/2	51	31	17
17	53	31-3/8	17-1/2
17-1/2	55	31-3/4	18
18	57	32	18-1/2
Tolerance	+ 1 - 1/2	± 1/2	+ 1/4 - 1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Sizes and finished measurements

Size	D Sleeve length											
12	27	28	29	30	31	32	33					
12-1/2	27	28	29	30	31	32	33					
13	27	28	29	30	31	32	33					
13-1/2	27	28	29	30	31	32	33	34	35			
14	27	28	29	30	31	32	33	34	35			
14-1/2		28	29	30	31	32	33	34	35	36	37	
15				30	31	32	33	34	35	36	37	38
15-1/2				30	31	32	33	34	35	36	37	38
16					31	32	33	34	35	36	37	
16-1/2					31	32	33	34	35	36	37	
17						32	33	34	35	36	37	
17-1/2						32	33	34	35	36	37	
18						32	33	34	35	36		
Tolerance	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2

NOTE: Except where otherwise specified, the shirt shall be buttoned and laid flat and smooth when measurements are taken.

(A) Chest - Twice the measurement taken across the chest at base of the armhole from folded edge to folded edge.

(B) Length - Measure from the neckline seam to the bottom of the shirt along the center back.

(C) Collar stand - With the shirt unbuttoned and the collar laid flat and smooth, measure across the inside length of the collar stand from the center of the collar button to the far-end of the corresponding buttonhole.

(D) Sleeve length - With sleeve extended, measure from the center back at lower edge of collar stand seam to bottom edge of cuff.

Workmanship. The finished shirts shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Responsibility for inspection. The supplier is responsible for assuring the product conforms to the requirements. Shirt lots will be inspected to determine conformance with the Commercial Item Description and the successful offerer's technical proposal as negotiated. Acceptability of shirt lots will be determined by the use of "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQL Z1.4, published by the American Society for Quality Control. Sampling procedures will be designated by the Government at the time of award. The shirt will be examined for commercial type defects only.

Defects. The shirts shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; label missing, incorrect, or illegible; measurement of item not as specified; pocket or flap not uniform in size or shape; any measurements varying from pocket to pocket or flap to flap by more than 3/8 inch; pockets/flaps out of alignment at any point from pocket to pocket or flap to flap by more than 3/8 inch; collar points uneven in length more than 3/8 inch; collar points not properly forced out; fusible any evidence of bleed through, delimitation (such as bubbling), or color change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0.

Examination	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, or method of application
Material	Any component missing, damaged, not as specified
Content	Number of items per container is more or less than required NSN shown on one or more items not as specified on shipping container
Palletization	Length , width, or height exceeds specified maximum requirements Pallet type not as specified Load bonded as specified

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3775 - Yarns per inch
ASTM-D 3776 - Weight
ASTM-D 5034 - Breaking strength
ASTM-D 1424 - Tearing strength

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC 20A - Fiber Analysis: Quantitative
AATCC 135 - Dimensional Changes in Automatic Home Laundering of Woven and Knit Fabrics

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

Custodian:
Navy - NU

Civil Agency Coordinating Activity
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8405-0206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

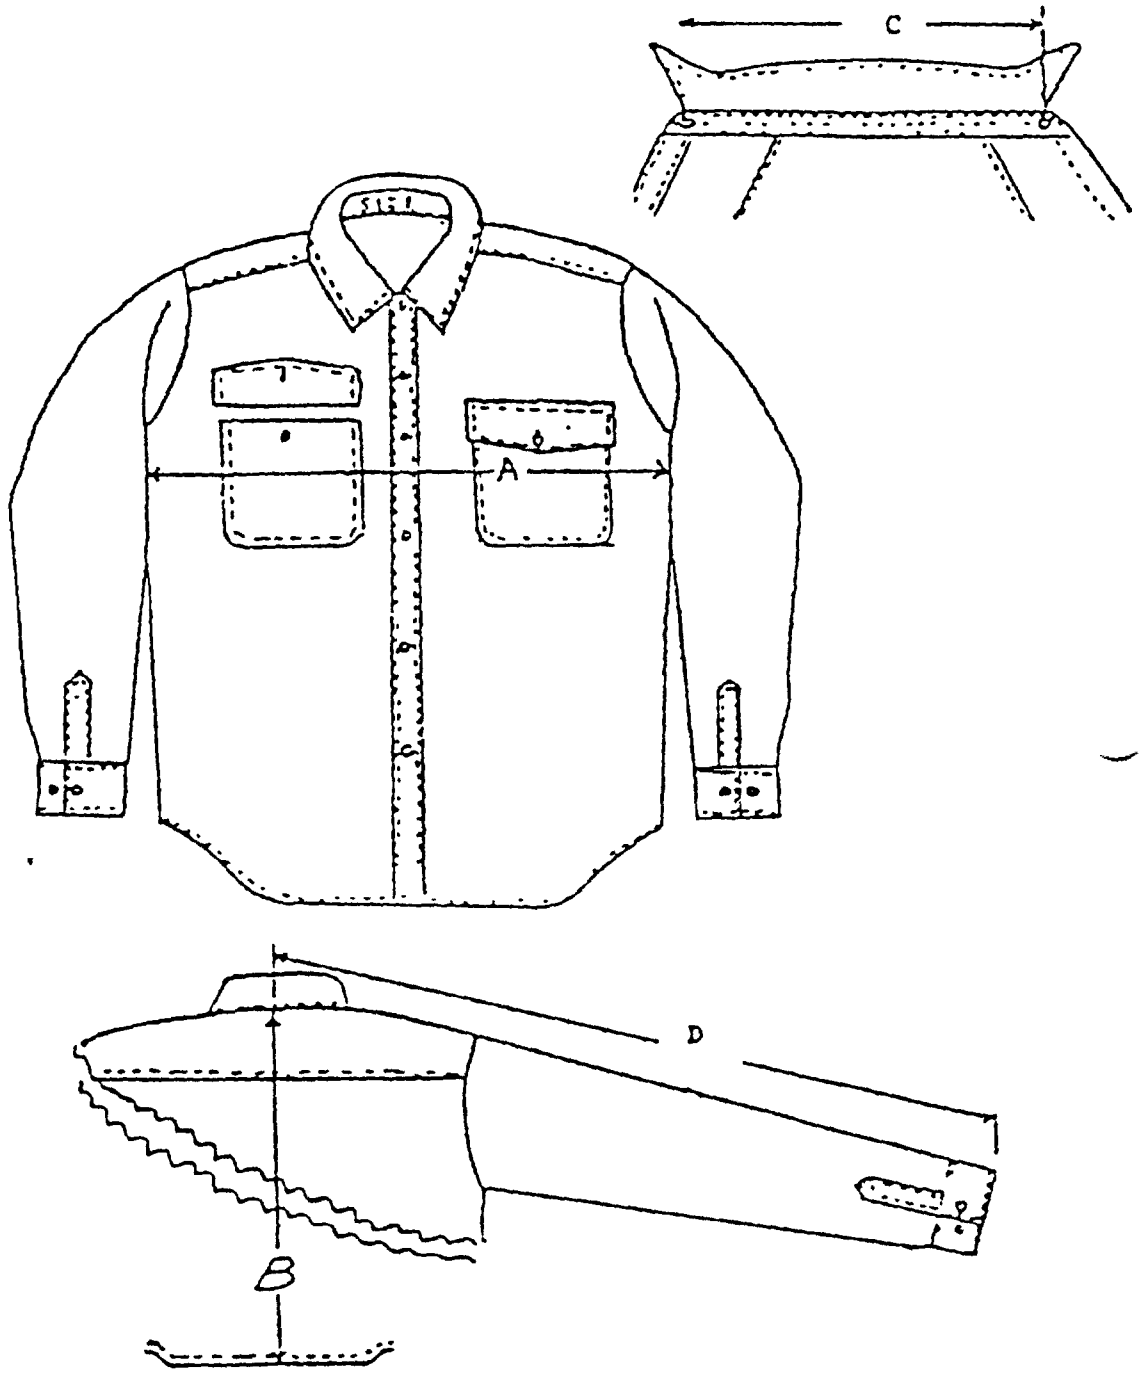


Figure 1 - Shirt, Man's Polyester/Wool, Long Sleeve

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revisior letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification o requirements on current contracts. Comments submitted on this form do not constitute or imply authorization tc waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55091	930311

3. DOCUMENT TITLE
SHIRT, MAN'S, POLYESTER AND WOOL, LONG SLEEVE

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.