INCH-POUND

A-A-55102
June 10, 1995

COMMERCIAL ITEM DESCRIPTION

LINER, FOOD INSPECTOR'S SMOCK

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-L-44042 for all Federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description covers a liner intended to provide added warmth to personnel of the Army Medical Services engaged in food inspection activities.

2. CLASSIFICATION. The liner shall be provided in the following sizes:

Small Medium Large Extra Large

NOTE: Small, Medium, Large, and Extra Large may be abbreviated as SM, MED, LG, and XLG.

3. SALIENT CHARACTERISTICS.

3.1 Description. The liner shall be coat length with a snap front closure, waist drawcord, and zippered hood with drawcord around face opening. The drawcords shall be cut in the following lengths for all sizes: two each, 25 ± 1/2 inches long for hood; one each, 56 ± 1/2 inches long for waist. All drawcord outlets shall have eyelets which have been reinforced with 1-1/2 x 3/4 pieces of oxford cloth.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSC, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

The liner shall have a knitted collarette and cuffs, and two side pass throughs. All seams shall be overedged. The liner is intended to be worn with the Smock, Man's, Food Inspector's (See Figure 1).

3.2 Materials.

3.2.1 Basic material.

The cover for the batting shall be ripstop nylon cloth, with a pattern of two warp ends woven as one and two filling picks per shed. The color shall be natural (unbleached) and 1.1 ounces per sq. yd. (maximum). There shall be 120 warp yarns per inch and 120 filling yarns per inch. The cloth shall conform to the following end item test requirements:

Characteristic	Results		Test method
	Warp	Filling	
Breaking strength lbs. (min.)	42	42	ASTM D-5035
Dimensional Stability (max.)	2.0%	change	(see below)

3.2.1.1 Dimensional stability test. The test specimen shall be a square of cloth a minimum 20 by 20 inches. Before marking and measuring for dimensional change, the specimen shall be in equilibrium with Standard Conditions as defined in FED-STD-191. The specimen shall be laid without tension on flat surface and shall be inscribed with an 18-inch square approximately equidistant from the edges having sides parallel to the warp and nominal filling directions. The marked specimen shall be placed in a preheated oven and maintained at a temperature of $280^{\circ} \pm 20^{\circ}$ F for a period of 2 hours. The specimen may be looped over a rod or laid flat on a rack both of which shall be low-conductivity (nonmetallic) material and have free air circulation on both sides. Promptly remove the specimen from the oven, allow to cool on a flat surface, and then bring to equilibrium under Standard Conditions. Measure each side of the inscribed square for dimensional change in both the warp and filling directions (two measurements each for the warp and filling per specimen). Each change in dimension shall be reported to the nearest 0.1 percent. The specimen shall also be visually compared with the original unheated cloth for any appreciable distortion or puckering. 1/

1/ Appreciable means a change that is immediately noticeable when comparing the tested specimen with the original. If closure inspection is required to make apparent a slight change, the change is not considered appreciable.

3.2.2 Polyester batting. The batting shall be 10 oz./sq. yd. continuous filament (4.0 to 6.0 denier) or hollow cut staple (5.25 to 6.0 denier), thickness, inches at 0.01 psi. should be a minimum of 1.00. The use of any form of polyester waste is prohibited.

Source: https://assist.dla.mil - Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

3.2.3 Thread. The thread for seaming and stitching shall be cotton covered, polyester, white, ticket numbers 50, 2 ply and 70, 2 ply, Tex 36 - 45.

3.2.4 Facings and welts. The material for facings, pocket welts, eyelet reinforcements and when used for waist drawcord tunnel shall be cloth, oxford, nylon, 3 ounce, natural color, 180 warp yarns per inch and 76 filling yarns per inch. The breaking strength shall be 220 pounds for the warp and 135 pounds for the filling.

3.2.5 Collarette and cuff The yarn for knitting the cuff and collarette fabric shall be made from natural color, first quality, multifilament nylon.

3.2.6 Cuff. The cuff shall be made on a circular knitting machine, seamless, with a 1 by 1 rib stitch, and have not less than 14 wales and 26 courses per inch. The cuffs shall have a tuck or expanding stitch not less than 1-1/2 or more than 2 inches in length when cut and doubled. The finished cuffs shall conform to the following measurements:

Cuff measurements

Length (inches)	Folded edge (inches)	Open edge (inches)	Tolerance (inches)	Weight per dozen pair
7	2-1/2	4	± 3/8	4 ounces

3.2.7 Collarette. The finished fabric shall be a true 1 by 1 ribbed knit and have a minimum of 12 wales and 26 courses per inch and shall have a finished weight of not less than 8 ounces per square yard of single fabric.

3.2.8 Tape. The tape for waist drawcord tunnel and hanger loop shall be tape, nylon, woven, natural color, 3/4 inch wide, .015 - .025 inch thick with a breaking strength of 400 pounds. The tape shall have 150 yarns per warp and 66 yarns per filling.

3.2.9 Cord, nylon. The drawcord for the hood and waist shall be nylon, natural color with a breaking strength of 95 pounds, (minimum) and elongation of 30 percent (minimum). The length per pound shall be 950 feet (minimum). After cord is cut to required length, the ends shall be fused to prevent raveling. The construction shall conform to the following requirements:

	Yarn Denier/ply	Ply
Core	210/3	5 to 7
Sleeve	70/3	15 to 19

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

3.2.10 Slide fastener. The slide hood shall conform to requirements for type I, style 4, size IM with short tab pull of V-F-106. The fastener chain shall be fabricated of aluminum, brass or zinc.

3.2.10.1 Length of slide fasteners. The respective lengths of the slide fastener shall be 11-1/2 inches for small size, 12 inches for medium size, 12-1/2 inches for large size, and 13 inches for X-large sizes.

3.2.10.2 Slide fastener tape. The tape shall be white cotton.

3.2.11 Snap fasteners. The snap fasteners shall be fasteners, snap, brass, style, 2A, male and female complete, consisting of stud and eyelet size 1 or 2 and socket conforming to MIL-F-10884.

3.2.12 Eyelets. The eyelets for drawcord outlets shall be brass, conforming to BWE 107 of MIL-E-20652/1.

3.3 Label/marking. A commercial type label is acceptable, provided that an additional printed cloth label containing the contractors name, contract number, size and National Stock Number (NSN) is caught on the stitching of the commercial label. The commercial label shall include fiber and laundering information.

3.3.1 Identification, size and instruction labels. The identification, size and instruction labels shall be made on nonwoven, spunbonded polyester cloth, or mildew resistant printed, acrylic coated, impregnated, nonwoven 80/20 polyester/cellulose cloth. The instruction label shall contain the following information:

LINER, FOOD INSPECTOR'S SMOCK

1. Dry liner and smock separately when damp or wet.
2. Avoid contact with heated stoves or other heat sources; fabric may fuse.
3. Wash by hand or machine in warm water with mild soap or detergent, Rinse thoroughly and drip or machine dry.

DO NOT DRY CLEAN

3.4 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

3.5 Patterns. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/2 inch for joining seams and 1/4 inch for all other seams. Commercial patterns may be used in lieu of the Government furnished pattern provided they conform to the cited design and finished measurements.

3.6 Sizes and measurements. The finished liner shall conform to the measurements below.

TABLE I. Finished measurements (inches)

	Sm	Med	Lg	X-Lg	Tolerance
1/2 breast measurement 1/	24	26	28	30	± 3/4
Back length 2/	46	48	50	52	± 3/4
Sleeve length 3/	17-1/2	17-1/2	17-1/2	17-1/2	± 1/2

1/ Measure at base of armhole, from folded edge to folded edge, with front closed

2/ Measure along center back from hood joining seam to extreme bottom edge of liner.

3/ Measure from base of armhole along inseam to bottom of sleeve, excluding cuff.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description; conforms to the producer's own drawings, specifications, standards and quality assurance practices; and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract.

5.2 Market acceptability. The item offered, or a generic equivalent, must have been sold to the commercial market or to the Government for at least 2 years.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

5.3 Visual examination. Liner lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

5.3.1 Defects. Any hole, cut, tear; color not as specified; any spot or stain (outside); thread ends not removed; any bartacks missing insecure, or misplaced; any component part or required operation omitted; any draw cord ends not fused, knots omitted; any eyelets missing, defective, or not securely clinches; rough or sharp edges on one or more eyelets; label missing; any hood drawcords less than 24-1/2 or more than 25-1/2 inches, or caught by snap fastener; any snap fasteners cap portion less than 7/8 or more than 1-1/8 inch from side or top edge; any slide fastener tape stitched too close to metal chain obstructing freedom of slider; any fastener tape set too loose or too tight, causing noticeable bulge on tape or hood; any excessive fullness or puckering on hood at joining to neck incorrect, eyelets on right side are less than 7/8 or more than 1-1/8 inch from side edge, on left side are less than 1-3/8 or more than 1-5/8 inch from bottom of edge; not centered on facing by more than 1/8 inch; collarette twisted or distorted; hanger ends not caught between collarette twisted or fronts uneven in length when closed; wristlets badly twisted; or illegible measurement of item not as specified, and any variance not otherwise classified herein; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Sources of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Sources of Nongovernment documents

ASTM Test Methods

(Applications for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection of Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.)

Custodians:
Army - GL
Navy - NU
Air Force - 99

Review Activities:
Army - MD

Air Force - 45

Civil Agency Coordinating Activity
GSA - FSS

Preparing Activity:
DLA - CT

(Project No. 8415-0051)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

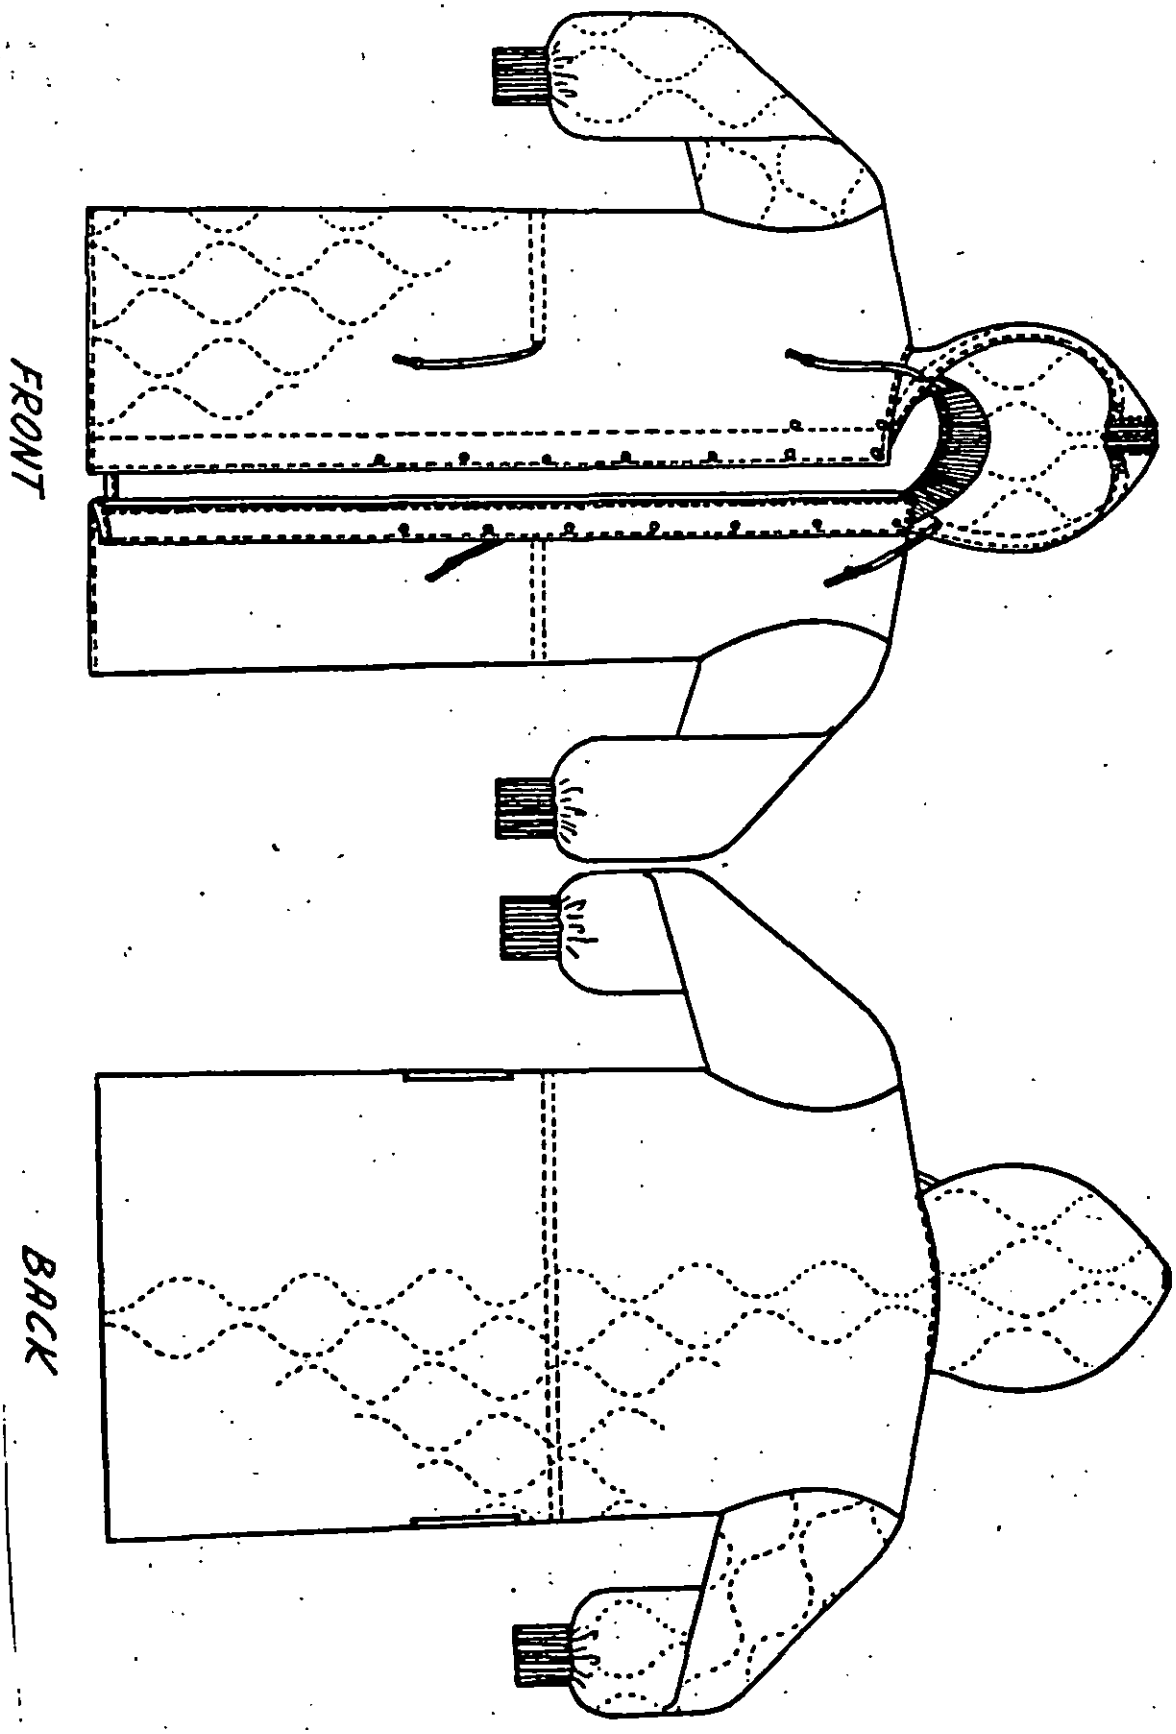


FIGURE 1. Liner, Food Inspector's Smock

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.