INCH-POUND

A-A-55104
10 December 1992

COMMERCIAL ITEM DESCRIPTION

COVERALLS, SAFETY, INDUSTRIAL

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-43339.

Classification. The coveralls shall be in one type.

Sizes. The coveralls shall be provided in the following sizes:

Sizes - Extra-Small, Small, Medium, Large, Extra-Large.

NOTE: Extra-Small, Small, Medium, Large, and Extra Large may be abbreviated as XS, SM, MED, LG, and XLG.

Abstract. This commercial item description covers the requirements for an industrial, lint-free coverall intended for wear by male personnel in the Department of Defense.

Salient Characteristics. The coveralls shall be made from polyester taffeta cloth, have 5 buttons and 5 buttonholes, front closure, shirt style collar, long sleeves, a right hip pocket and a left chest pocket with pencil opening. The following seams shall be double lapped, double stitched: Shoulder joining seams, setting sleeve seams, underarm sleeves, trouser to jacket joining seam, seat seam, inseams and outseams. The pockets shall be double stitched (see Figure 1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

Material. The basic material shall be polyester taffeta plain weave cloth. The warp and filling yarns shall be semi-dull, multifilament, polyethylene glycol terephthalate. (A certificate of compliance shall be submitted for this requirement). The finished fabric shall have a minimum of 74 warp yarns per inch and 62 filling yarns per inch conforming to ASTM Test Method D3775 with a weight of 2.8 ounces per sq. yd. conforming to ASTM Test Method D3776. The color of the cloth shall be Tan 448. The dyed cloth shall show "good" colorfastness to light, laundering and perspiration, and shall have a Munsell Value for crocking no lower than 8.5. The cloth shall not shrink more than 2.0 percent in either the direction of the warp or of the filling when tested in the "End Item Performance Testing".

End Item Performance Testing. .

Characteristic	Test methods
Colorfastness to:	
Crocking	AATCC-8-1988
Breaking strength (Grab method):	
Warp	ASTM-D-1682
Filling	ASTM-D-1682
Air permeability	ASTM-D-737-75
Anti-static finish:	
Before laundering	ASTM-D-4238
After laundering	ASTM-D-4238
Shrinkage	AATCC-96-1988

Antistatic finish. The cloth shall be given a durable antistatic finish so that the maximum resistivity of any one sample before laundering shall be 1.0×10^{11} ohms per square and the maximum resistivity of any one sample after five laundering shall be 5.0×10^{11} ohms per square. The durable antistatic treatment can be met with Aston 123, and Stanax (Not Stanax 1166). Other approved treatments may be listed in the invitation to bids or request for proposal. Other products considered for this use must have prior approval from the contracting officer.

Thread. The polyester thread for seaming, stitching, attaching buttons, and making buttonholes shall be twisted soft multiple cord or twisted bonded multiple core. Nominal Tex size shall be size 50 for the needle and size 24 for the bobbin/looper with the breaking strength of 4.3 to 4.5 for size 50 and a breaking strength of 2.0 to 2.3 for size 24.

Gimp. The gimp for reinforcing buttonholes (when applicable) shall be Khaki P-1, C.A. 66019, cotton, soft finish or glazed finish, size 8.

Colorfastness. The dyed gimp shall show "good" fastness to laundering (after 3 cycles).

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

Labels. Each coverall shall have a combination identification-size label and an instruction label for garments or combination size, identification, and instruction label which shall be nonwoven, spunbonded polyester cloth or nonwoven, 80/20 polyester/cellulose cloth, impregnated, acrylic coated, and shall not contain skin irritants or toxic materials, mildew-resistant printed. Labels shall show good colorfastness to accelerated laundering.

COVERALLS, MEN'S
CONTRACT NO; DLA-100-00-00-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER (if other than contractor)

Instruction label. The instruction label shall contain the following information:

COVERALL, SAFETY, INDUSTRIAL

1. Wear over personal clothing; will provide a lint-free surface.
2. Do not expose to intense heat: material will melt.
3. Launder by hand or machine with a detergent solution.

Buttons. The sewing hole buttons shall be a Melamineformaldehyde composition, 30 line and .200 inch thick Khaki AL.

Buttonholes. Buttonholes shall be of sufficient size to accommodate the correct size button. The purling shall be on the outside of the coverall.

Sizes and Measurements. The finished coverall shall conform to the measurements below.

Table I Table of measurements (inches)

Size	X-Sm.	Sm.	Med	Lg.	X-Lg.	Tolerance
1/2 Chest 1/	20-1/2	22-1/2	24-1/2	26-1/2	28-1/2	± 1
1/2 Waist 2/	17	19	21	23	25	± 1
Sleeve inseam 3/	23	23	23	23	23	± 1
Leg inseam 4/	32	32	32	32	32	± 1
Overall length 5/	64-1/2	65-1/2	66-1/2	67-1/2	68-1/2	± 1

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

1/ With coverall buttoned, measure across front at base of armholes.

2/ With coverall buttoned, measure across waist seam from folded edge to folded edge.

3/ Measure from base of armhole along sleeve seam to bottom of sleeve.

4/ Measure from crotch seam along inseam to bottom of leg.

5/ Measure from base of neck along center back to bottom of leg.

Workmanship. After completion, the finished coverall shall be clean, and all loose thread, lint, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the rights to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Examination. Lots of coveralls shall be inspected in accordance with "Sampling Procedures and Table for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL 1.5 expressed in terms of defects per hundred units. The sample unit is one coverall.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Dimensional examination. The finished coveralls shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one coverall; the inspection level shall be S-4 and the AQL shall be 1.0 expressed in terms of defects per hundred units..

Packaging examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-1 and AQL shall be 2.1 expressed in terms of defects per hundred units.

Examination	Defect
Material	Missing, damaged, not as required.
Content	Number of coveralls per shipping container is more or less than required.

Defects. The coveralls shall be examined for the following defects: any defects in design, material, construction and workmanship; any component full, tight or twisted; any open seam; cut, tear, smash, run or loose yarn; baggy, ridgy or wavy cloth; any shade bar, dye streak, or area of poor dye penetration; any spot or stain clearly noticeable; any thread not removed; label missing, incorrect, or illegible; any size hole; measurement of item not specified.

Packaging, Packing, Marking, and Palletization

Packaging, packing, marking and palletization shall be in accordance with ASTM-D 3951, Standard Practice for Commercial Packaging, as specified for shipments to the Department of Defense, including Section 7. Shipping cartons shall be style RSC-L, variety SW, with DW liners, class Domestic, grade 275.

Note: Each shipping container shall contain only one National Stock Number (NSN) and a total quantity of forty coveralls packaged as specified above.

Unitized loads, placing boxes on pallets, shall be used whenever total quantity for shipment to one destination exceeds 250 pounds (excluding the pallet) or 20 cubic feet. Pallets shall have a length of 40 inches and a width of 48 inches.

Pallet loads, including the pallet, shall not exceed 54 inches in height, 43 inches in length and 52 inches in width.

The containers shall be bonded onto wing type commercial 4-way entry pallets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Note: All palletized loads shall contain only one NSN, to the maximum extent possible. When there is less than a pallet load per NSN, pallets may have containers not of the same NSN, but the pallet shall be clearly marked "mixed" and each applicable NSN shall be listed together with its total quantity.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308).

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

Sources of Supply

Aston 123 -	Refined Onyx, Division of Millmaster Onyx Corp., 624 Schuyler Ave., Lyndhurst, NC 07071
Stanax (not Stanax 1166)	Standard Chemical Products Co., Inc., 1301 Jefferson Street Hoboken, NJ 07030

Custodian:
Army - GL
Navy - NU
Air Force - 99

Review Activity:
Army - MD
Air Force - 82

User Activity:
Air Force - 45

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project NO. 8415-0872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

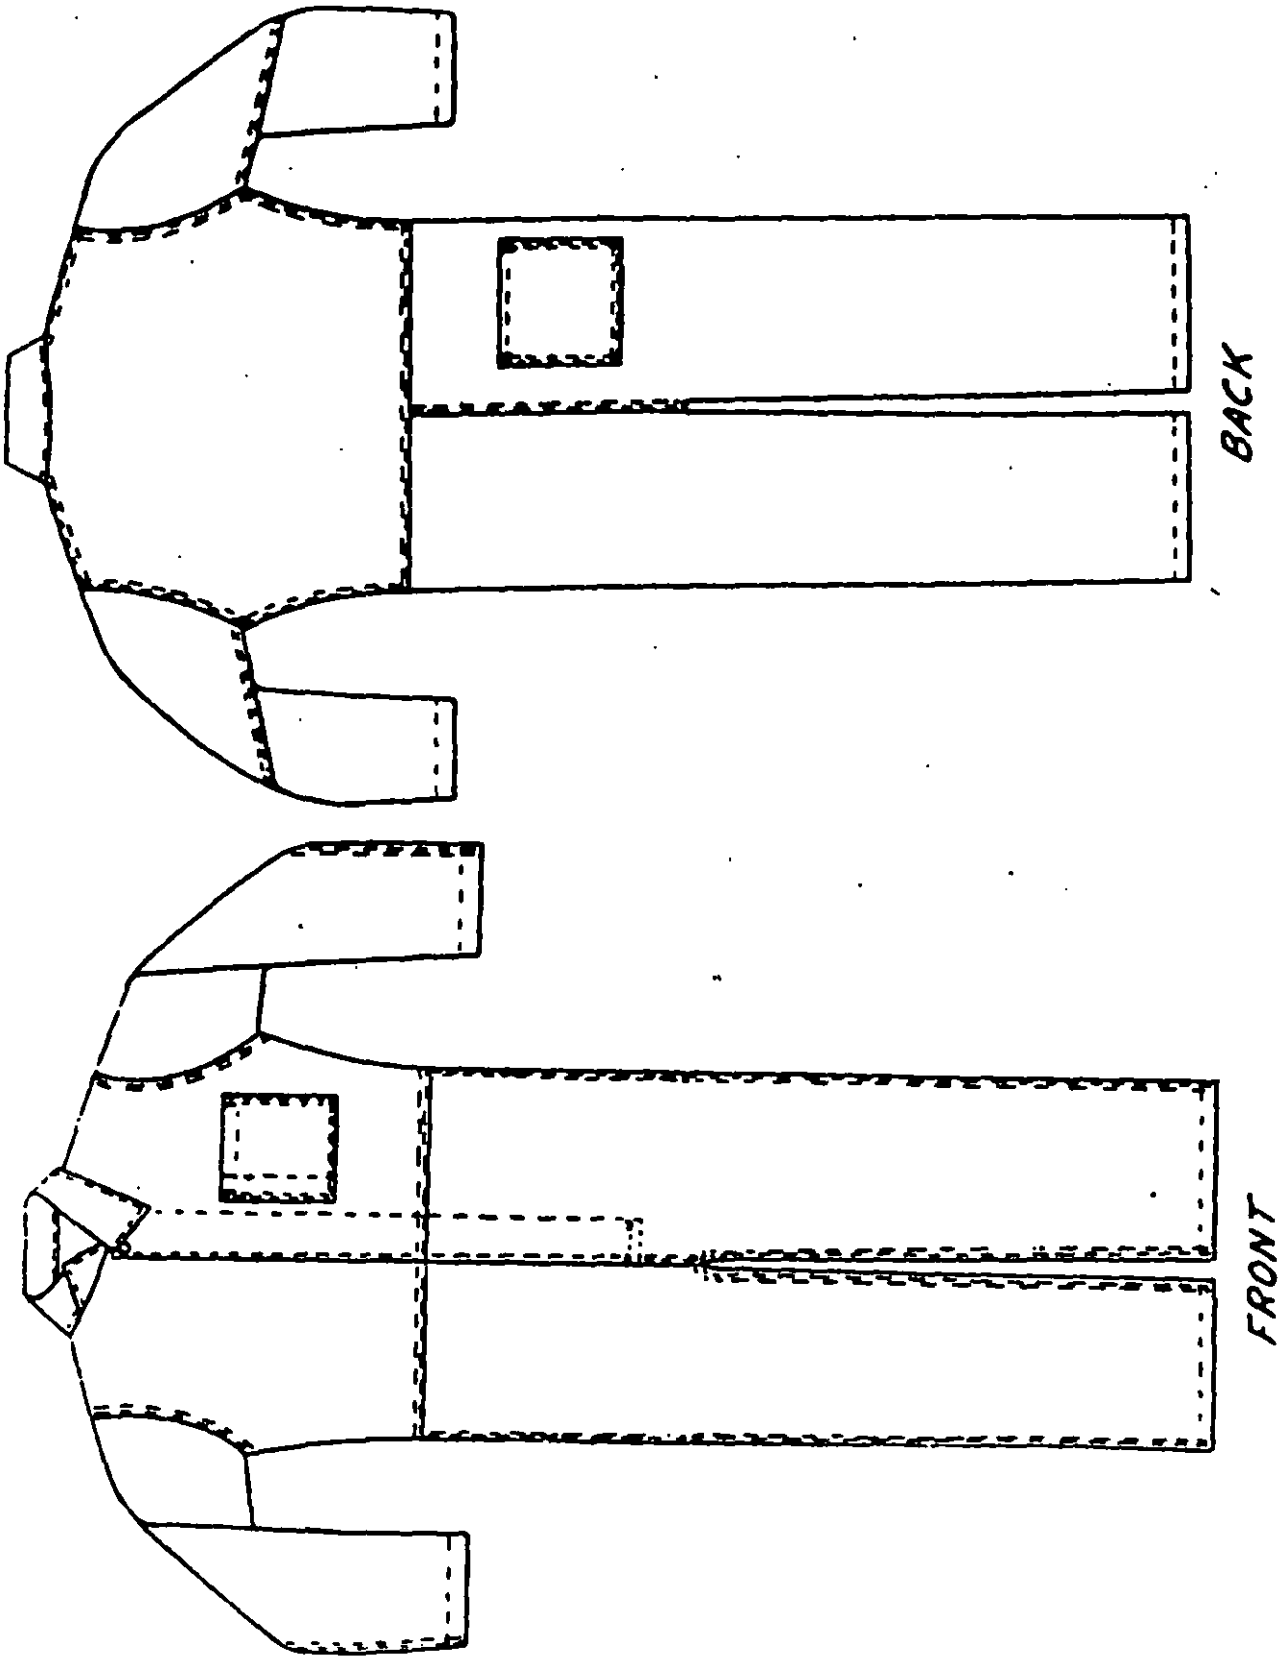


FIGURE 1. Coveralls, Safety, Industrial

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55104	92-12-10

3. DOCUMENT TITLE
COVERALLS, SAFETY, INDUSTRIAL

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198.29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.