INCH-POUND
A-A-55105A
JUNE 9, 2020
SUPERSEDING
A-A-55105
17 December 1992

COMMERCIAL ITEM DESCRIPTION

BAG, BARRACKS

The General Services Administration has authorized the use of this Commercial Item Description in preference to A-A-55105.

1. SCOPE. This document covers bag, barracks one type and size, with drawstring closure. The barracks bag is intended for use as a laundry bag to hold the soiled clothing of enlisted men and women.

2. SALIENT CHARACTERISTICS. The bag shall be made of cloth in accordance with requirements table. The color shall be Camouflage Green 483. The finished bag shall measure 32 ± $^{3}/_{4}$ inches in length by 24 $^{3}/_{4}$ ± $^{1}/_{2}$ inches in width. The construction shall conform to Figure 1, and shall be as specified herein. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

2.1 Materials.

2.1.1 Cloth.

Table I. Material Physical Requirements

Characteristic	**Requirement**	**Test Method**
Fiber Content	Cotton	AATCC 20 and 20A, 1/
Weave	5-harness sateen	Visual
Weight, oz/yd2	Maximum: 9.3	ASTM D3776, Opt C
Fabric Count		
Warp	Minimum: 85	ASTM D3775
Fill	Minimum: 48	
Breaking Strength, lb		
Warp	Minimum: 115	ASTM D5034

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: DLA Troop Support, Clothing and Textiles Directorate, Attn: DLA Troop Support Standardization Team, 700 Robbins Street, Philadelphia, PA 19111.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Fill	Minimum: 100	
Dimensional Stability, %		
Warp	Maximum: 2.0	AATCC 96 Vc, D, 1 cycle, 2/
Fill	Maximum: 2.0	
pH	5.0 – 8.5	AATCC 81
Colorfastness to Laundry		
Color Change	Minimum: 3-4	AATCC 61 3A, 3 cycles
Staining, 3/	Minimum: 3-4	
Colorfastness to Light, 170 kJ/(m2nm) @ 420 nm	Minimum: 3-4	AATCC 16.3
Colorfastness to Perspiration		
Color Change	Minimum: 3-4	AATCC 15
Staining, 3/	Minimum: 3-4	

1/In cases of dispute only 2/ Except the samples will not be subjected to restoration forces. 3/ except only the cotton of the color transfer cloth shall be evaluated. In accordance with Army in a letter change dated 03 March 2015 for all dyed/printed cloths which are cotton or cotton-containing blends be updated to state: Labile sulfur. Dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid shall not be used. The existing requirement in both Section 3 and Section 4 can then be deleted. Recommend omitting non-fibrous content and seam efficiency. Copies of AATCC documents can be found at: https://www.aatcc.org/.

2.1.2 Thread, polyester. The thread for all stitching shall be twisted soft multiple cord. The yarn shall be continuous multifilament polyester. Thread size is 70, the thread shall be dyed Camouflage Green 483. The thread shall show good color fastness to laundering.

2.1.3 Braid, tubular, cotton. The braid shall be $^{6}/_{32}$ inch diameter, solid. The cotton used to make the yarn shall be carded, spun, and twisted into ply yarns. The length of the braid shall be 62 ± $^{1}/_{2}$ inches, two (2) braid are required for the bag. The braid shall be dyed Camouflage Green 483 and shall show fastness to light, laundering (after 3 cycles), crocking, and wet-dry cleaning. The natural finish shall denote a braid for which no consistency or luster other than that inherent in the basic fiber is required.

2.1.4 Grommets. The grommets shall be brass and spur washer, and shall conform to type III, Class 3 size No. 1 of NASM16491. Copies of NASM16491 can be found at: https://www.aia-aerospace.org/.

2.1.5 Stitches, Seams & Stitching. Type 301 (lock stitch): all lock stitching shall be backstitched or overstitched 1 inch minimum, 8 to 10 stitches per inch. Or type 401 (chain stitch): all chain stitching shall be backstitched or overstitched 1/2 inch minimum, 8 to 10 stitches per inch. Chain portion of stitching shall not appear on outside of bag. Bartacking: bartacking (method of attaching ends of draw string to bag body) shall be 3/4 +/- 1/16 inch in length, 1/8 +/- 1/32 inch in width and shall contain not less than 42 stitches."

2.1.6 Marking. The letters "US" shall be applied in the size characters and in the location as indicated on Figure 1. The markings shall be applied to the cloth by either direct printing, stamping or stenciling with a black marking medium and shall have colorfastness to laundering. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

identification marking shall be applied on the inside of the bag, 3½ below the top edge, as follows: item description contract number national stock number (NSN) contractor's name.

2.1.7 Barcode/Label Tag. Each item shall be individually bar-coded with a paper tag, standard bleach sulfate with a basis weight of 100 lbs. The bar code shall be a 13 digit national stock number (NSN). The bar code shall be used with a medium to high code density and shall be human-readable interpretation (HRI). The label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and shall cause no damage to the item.

2.1.8 Workmanship. After completion, the finished bag shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed.

3. QUALITY ASSURANCE PROVISIONS

3.1 Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

3.2 Examination. Bag Lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

3.3 Visual Defects. The bag shall be examined for the defects listed below.

Table II. Visual defects

Examination	**Defect**
Cloth	Hole, cut, or tear; any smash, weak place, broken or missing yarn, multiple floats, or open place, clearly visible.
	Shade bar, fine or coarse filling bar.
Examination: Workmanship	Not within industry standards or practices.
Grommet	Clinched excessively tight, cutting surrounding material. Insecurely clinched to a degree that grommet may be detached from material.
Component and assembly	Any operation omitted, added or not performed (unless otherwise classified herein).
	Seam badly pleated or puckered.
	Needle chews.
Hems	Formed on outside of bag.
	Twisted or pleated.
Drawstrings (two required in hem)	Either drawstring caught in hem stitching causing failure to draw freely. loop not extended thru grommet on each side.
Markings	Omitted, incorrect, illegible, misplaced or size of characters not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Cleanness	Spots or stains clearly noticeable; thread ends not trimmed to 1/4 inch maximum length.
Seams and Stitching	Open seams ½ Inch or less, or more than ½ inch
	Wrong seam or stitch type
	Two or more stitches less than minimum specified
	Any bartack missing
Barcode/Label Tag	Omitted or not readable by scanner
Human Readable Interpretation	Omitted or illegible; not visible on folded or packaged item
Packaged Item	Causes damage to the item

3.4 Dimensional Examination. The finished bag shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one bag.

3.5 Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot.

EXAMINE	**DEFECT**
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

4. PACKAGING.

4.1 Packaging, packing, palletization, and marking. Packaging, palletization, and marking shall be in accordance with ASTM D 3951. Fifty bags shall be packed in a fiberboard box conforming to ASTM-D5118/D5118M. The inside dimensions of the box shall be approximately 24 by 16 by 13 inches. The box shall be closed in accordance with the appendix of ASTM-D5118/D5118M.

4.2 Palletization. Boxes shall be palletized on a 4 way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D, or film bonding means F or G. The pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

4.3 Marking. Marking shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

5. NOTES

5.1 Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 available at https://www.epa.gov/ to the maximum extent practicable.

5.2 Source of Government Documents. Copies of Military and Federal documents are available from: https://assist.dla.mil/online/start/.

5.3 Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodian:
DLA-CT


Civil Agency Coordinating Activity:

GSA - FSS

Review Activity:
Army - GL

Preparing Activity
DLA – CT
Project No. 8465-2020-044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

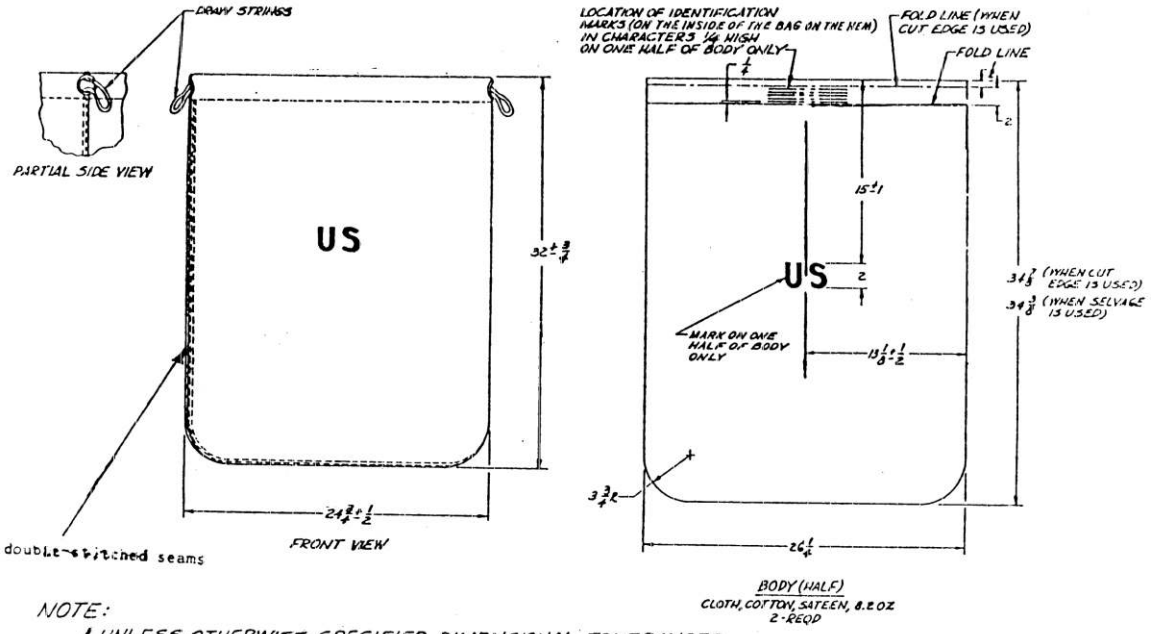

NOTE:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES SHALL BE AS FOLLOWS:

1/8 INCH	± 1/16
MORE THAN 1/8 BUT LESS THAN 2 INCHES	± 1/8
2 INCHES OR MORE BUT LESS THAN 10 INCHES	± 1/4
10 INCHES OR MORE	± 3/8

All measurements are in inches.

FIGURE I

BAG BARRACKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.