INCH-POUND
A-A-55106A
March 03, 1998
SUPERSEDING
A-A-55106
December 15, 1992

COMMERCIAL ITEM DESCRIPTION

WHISTLE, PLASTIC

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-W-1053.

1. **SCOPE**. This document covers a plastic whistle with a cork ball and lanyard. The plastic whistle is intended for use by military personnel performing police, guard, drill instruction, and other duties that require the use of a whistle.

2. **SALIENT CHARACTERISTICS**. The Whistle shall be made of high impact plastic with a ring opening for a lanyard attachment. The whistle shall be approximately .930 inches wide by 2.500 inches long by 1.250 inches high. The color shall be black or as specified in the contract or order. The Whistle shall have a smooth, high luster gloss finish, a cork ball and must emit an audible or tone when blown as intended. See Figures 1 and 2.

2.1. Materials

2.1.1. Plastic. The whistle body shall be made of high impact plastic and shall be tested in accordance with ASTM D 256 standard requirement of 6.5 +/- IZOD.

2.1.2. Cork ball. Cork for the ball shall be a quality natural cork or a clean soft grade uniformly granulated cork composition.

2.1.3. Lanyard. The lanyard for the whistle shall be made from cotton/nylon/polyester tubular braid. The length of the braid shall be 37(+ 1/2) inches (18 inches hang finished with whistle). The lanyard shall be black in color and have a colorfastness with a scale of "4.0", tested in accordance to AATCC 61, Test 3A-1989 "Colorfastness to laundering" and AATCC 8-1989 "Colorfastness to crocking". The lanyard shall be resistant to fraying.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be adressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A **FSC 8465**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

2.1.4. Slide keeper. The slide keeper shall be flexible, black in color or as specified, 1/2 inches in length or commercial acceptable length and compatible with the lanyard.

2.2. Marking. Each whistle body shall be permanently and distinctly marked with the letters "U.S.", the name of manufacturer or brand name and the year of manufacture. The size of the letters shall be approximately 3/32 inch high.

2.3. Label/Tag. The Label/Tag shall be as specified in the contract or order.

3. **REGULATORY REQUIREMENTS**. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1. Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own standards and quality assurance practices, and be the same product reserves the right to require proof of such conformance.

4.2. Visual examination. The whistles shall be examined for the defects listed below.

DEFECTS: Any required component or design characteristic missing or not as specified herein; any aspects of design, construction, assembly, function or finish not in accordance with good commercial practice; color not as specified; free of flashing, burrs, scratches, dents, cracks, cuts marking missing, incorrect, or illegible; measurement of item not as specified; failure to perform, function, and/or fulfill intended purpose; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on packaged item; bar code causes damage to the item; any item not packaged in accordance with the contract or purchase order, any other defect that will adversely affect function, performance, appearance or cause injury to the user.

4.3. Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

5. **PRESERVATION, PACKING, AND MARKING.** The preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1. Source of Government documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

6.2. Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing & Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19426-2959.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

6.3. Figures 1 and 2 Figures are provided for informational purposes only, to the extent of any inconsistencies between the document and the figures, the document shall govern.

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - NU
Air Force - 99

Review Activities:
Army - MD
Navy - AS MC
Air Force - 45, 82

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project Number
8465-0164

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

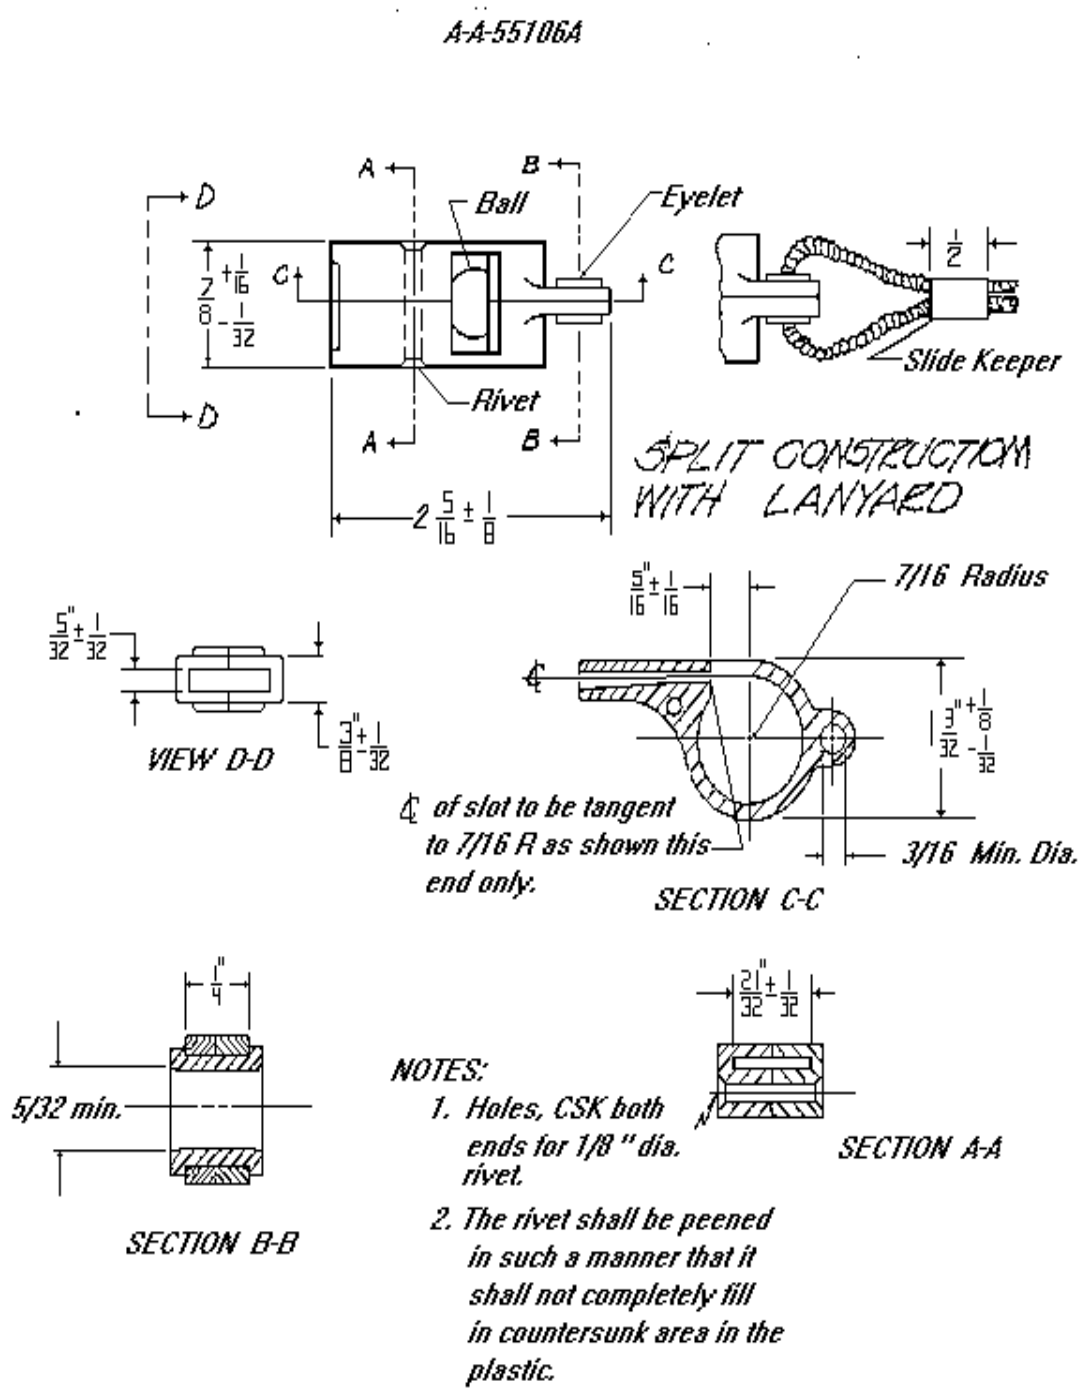

NOTE: The projection at the lip mouth opening shall be a min. of 3/64 inch radius.

FIGURE 1. WHISTLE, BALL, PLASTIC SPLIT CONSTRUCTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

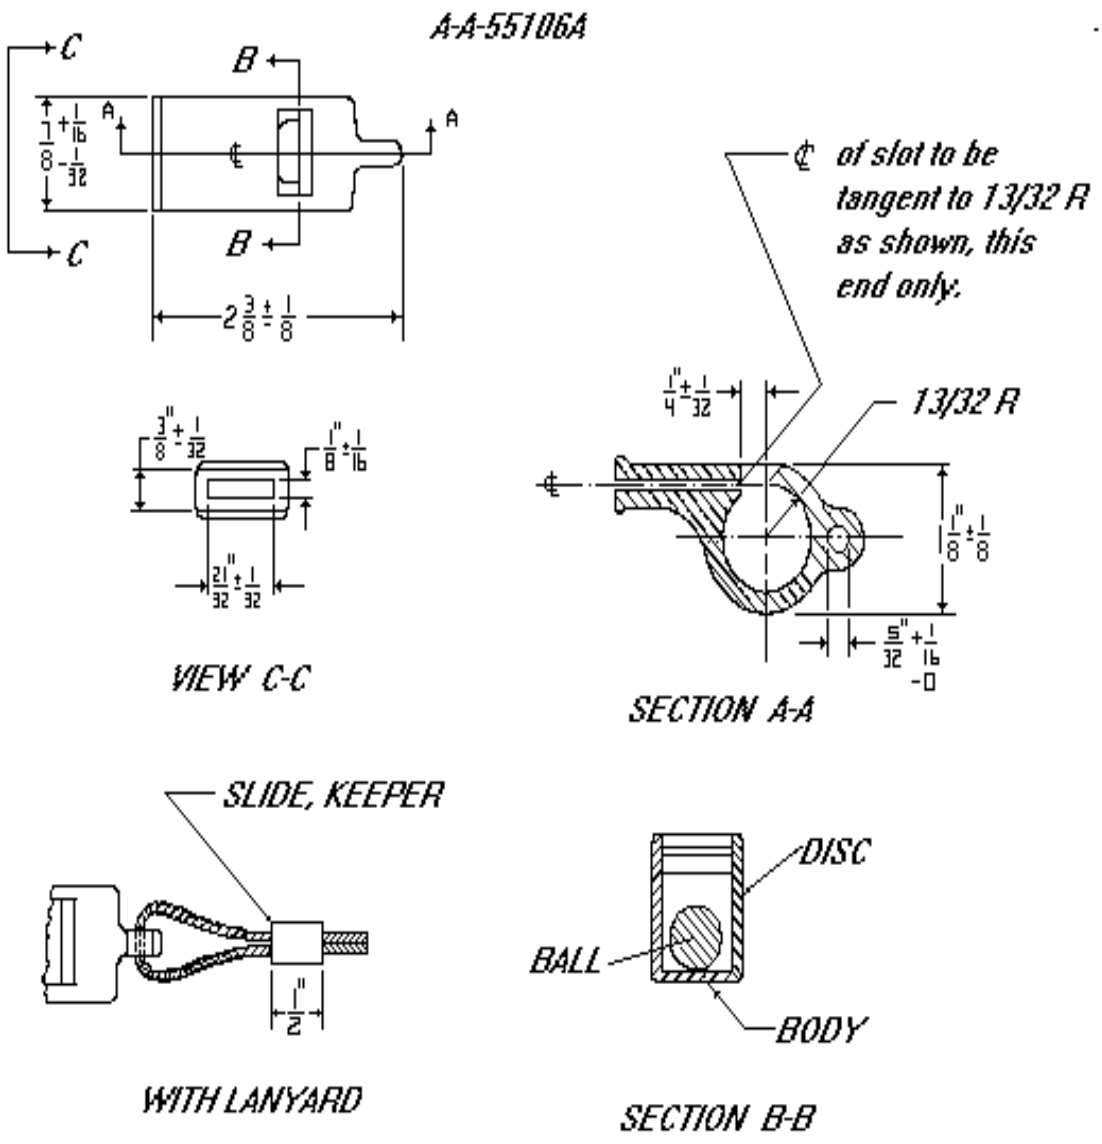

NOTE: The projcetion at the lip mouth opening shall be a minimum of 3/64 inch radius.

FIGURE 2. Whistle, Ball, Plastic Solid Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.