INCH-POUND

A-A-55108
16 December 1992

COMMERCIAL ITEM DESCRIPTION

HAT, SERVICE (WHITE)

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-H-87041.

Abstract. This Commercial Item Description covers the requirements for the Type I hat which is intended for wear by Navy enlisted men and the Type II hat which is intended for wear by Navel Academy Midshipmen and NROTC Midshipmen.

Classification. The service hats shall be in the following types:

Type I - Hat, Enlisted Man's
Type II - Hat, Midshipman's

Schedule of Sizes

6-1/2, 6-3/4, 7, 7-1/4, 7-1/2, 7-3/4, 8, 8-1/4, and 8-1/2

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Salient Characteristics. Type I and Type II hats shall be made of a white cotton twill fabric and shall have a 6 piece dome shaped crown, a flared, stitched turned up brim and self fabric sweatband.

The crown seams shall be covered with bias cut strips of the basic white cotton twill fabric on the inside of the hat. The strips shall finish 5/8 (± 1/16) inch wide, centered over the seam, with sides folded under and stitched on both sides approximately 1/16 inch from folded edges. There shall be no more than 1 splice per strip. A hanger loop shall be securely sewn into one of the seam covering strips, midway between top and bottom of crown, towards the back of the hat. The bottom edge of the crown shall be finished on the outside with a bias strip of the basic white twill fabric, finishing 1/4 to 1/2 inch wide. The distance from the outer edge of the brim to the bound edge of the crown shall be 2-13/16 to 2-15/16 inches.

The brim of the hat shall be interlined with buckram and interlining, with the twill cloth folded over the outer edge and seamed to the inside of brim. The hat shall have 70 to 75 rows of continuous, evenly spaced and parallel lock stitching over the entire circumference of the brim; 1/4 to 3/8 from the folded outer edge to the sweatband. The brim stitching shall have 10 to 12 stitches per inch, and the brim shall measure 2-1/2 to 2-7/8 inches in width from the folded edge to the breakline at bottom. The center of the diagonal joining seam on brim shall finish ± 1 inch from back of finished hat.

The sweatband shall be cut from the basic white cotton twill on the straight of grain, finishing 7/8 to 1-1/8 inches wide, stitched 1/16 to 1/8 from folded edges, and with 8 to 10 rows of uniformly spaced lockstitch. The joining seam of the sweatband shall finish approximately 1 inch from back crown seam, and the bottom folded edge of the sweatband shall measure 2-13/16 to 2-15/16 inches from folded edge of brim.

The hat shall be neatly blocked on the correct size heated block using live steam. As an alternate, dry heat hydraulic blocking is permitted.

Type II Midshipmen's hat shall be bound with the basic cotton twill fabric dyed shade Blue 3362. The binding shall be cut on the bias, one piece per hat, and shall not be spliced. The binding shall extend 7/8 to 1-1/8 inches on each side of brim, with a fold under edge on the outside of the brim, and the joining seam at the back of hat. Stitching on binding shall consist of 5 to 7 rows with black thread, evenly spaced across binding width, through all plies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Material.

Basic material. The basic material for the Types I and II hats shall be 3/1 twill, consisting of combed cotton singles or 2 ply yarn, and the color shall be White, shade 3035. The cloth used for binding the brim of the Type II hat shall be the basic material, dyed to match shade Blue 3362.

The dyed cloth shall show colorfastness to laundering (after 3 cycles), perspiration, crocking and light equal to or better than the standard sample. When no standard sample. When no standard sample is established, or is not referenced for colorfastness, the dyed cloth, unless otherwise specified, shall conform to the requirements specified in Table I, when tested as specified

Table I. Physical requirements and test methods

Characteristic	Requirement	Test method
Yarns/inch (min)	100 ends/inch 54 picks/inch	ASTM-D 3775
Weight (min)	7.2 oz./sq. yd.	ASTM-D 3776 Option C
Shrinkage or elongation	Shall not exceed an average of 2% in either the warp or filling directions, with no individual unit greater than 2.5%	AATCC 135
Breaking strength (lbs)		
Warp	160	ASTM-D 5034
Filling	95	ASTM-D 5034
Discoloration (bleached)	4/ 5/	AATCC 16
Colorfastness to:		
Laundering	Class 4	AATCC 61 1/
Perspiration	Class 4	AATCC 15
Light	Class 4	AATCC 16 2/ Option A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Table I. Physical requirements and test methods - cont.

Characteristic	Requirement	Test method
Dyed Fabric Only		
Colorfastness to: Combined laundering and bleaching	Good	5605 3/
Crocking	Grade 3	AATCC 8

1/ Launder for 3 full cycles, drying test specimens after each cycle.
2/ 40 Standard fading hours.
3/ Federal Test Method Std. No. 191A.
4/ One determination shall be made from each sample unit and the result reported as "pass" or "fail".
5/ TM AATCC 16, Option A shall be used, except that exposure of specimen shall be for 20 standard fading hours. Discoloration of the specimen shall be considered satisfactory if it is not worse than the rating of "fair" indicated in TM AATCC 16, Option A.

Figures. Figure 1 and 2 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

Interlining of the hat brim. The cloth used for the interlining of the hat brim shall be a plain weave cotton duck and shall conform to the physical requirements in Table II. Plied yarns of carded cotton shall be used for both warp and filling.

Table II. Physical requirements and test method

Characteristic	Requirements	Test method
Breaking strength		
Warp (pounds)	285 (Min)	ASTM-D 5034
Filling (pounds)	190 (Min)	ASTM-D 5034
Weight	17.6 oz./sq. yd. (min)	ASTM-D 3776 Option C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Reinforcement of the brim. The cloth used for the reinforcement of the brim interlining shall be cotton buckram bleached white and shall conform to Type III of A-A-50186, except that the shrinkage requirement shall not apply.

Cloth, nonwoven, polyester and rayon. As an alternate to the cotton buckram and the cotton duck interlining, a 70% polyester/30% rayon nonwoven material, conforming to the requirements in Table III may be used. The material shall conform to Pellon style number 3790 or equal. When this fabric is used, cut 4 parts using the cotton duck pattern piece. The pattern piece for the cotton buckram will not be used.

Table III. Physical requirements and test method

Characteristic	Requirements	Test method
Weight per square yard, oz.	4.7 (± 0.4)	ASTM-D 3776 Option C
Breaking strength, lbs.		
Warp	45 (Min)	ASTM-D 5034
Filling	45 (Min)	ASTM-D 5034

Tape, woven. The tape used for the hanger loops shall be cotton, 1/2 or 5/8 inch wide, bleached white with a 2/2 herringbone twill weave and a woven edge on both sides. The minimum requirement for yarns/inch shall be 74 ends/inch of 60/2 yarn, and 55 picks/inch of 30/1 or 60/2 yarn, when tested as specified in Test Method ASTM-D 3775. A ± 5% tolerance will be allowed for yarns/inch requirements..

Thread. The thread used for general seaming and stitching shall be cotton, shade White AH, Cable No. 66050, 3 ply, Ticket No. 70, conforming to Type I of A-A-52094. The cotton thread used for stitching the blue binding to the brim of the Type II hat shall be 3 ply, Ticket No. 70, shade Black, AA, Cable No. 66043, Type I of A-A-52094. As an alternate to the cotton thread, a cotton covered polyester thread, Ticket No. 70, 2 ply, conforming to Type I of A-A-50199 may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Label/marking. The contract number, applicable hat size and laundering instructions shall legibly marked on the sweatband by be heat transfer (decalcomania), direct printing, stamping, or stenciling, approximately 3/8 inch to the left or right of the back joining seam. As an option, the hat size and contract number may be marked on one side of the hanger loop, with the laundering instructions on the opposite side (see Figure 2). The finished length of the label shall be 2 to 2-1/8 inches. The labels or marking shall show a minimum of Class 4 colorfastness to accelerated laundering when tested as specified in Test Method AATCC No. 61, Test IVA. The contents of the inscription shall be as follows:

(Sweatband only)

DLA100-00-0-0000
HAND OR MACHINE WASH
WARM WITH MID DETERGENT.
TUMBLE DRY LOW OR HANG DRY

Size 7 1/4 (Example)

(Hanger loop only)

DLA100-00-0-0000 HAND OR MACHINE WASH WARM WITH MILD DETERGENT	TUMBLE DRY LOW OR HANG DRY S I Z E

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/4 inch. The government patterns shall not be altered in any way. The working patterns may be modified to accommodate automation; however, if the working patterns are modified the design and measurements must be maintained as intended by government patterns. Commercial patterns may be used in lieu of the government patterns provided they are approved for use by the government and conform to the cited design and finished measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Sizes and Measurements. The finished hats shall conform to the measurements below.

Finished Sizes and Measurements

Hat (marked) size	Head circumference inches	Hat (marked) size	Head circumference inches
6 1/2	20 1/2	7 1/2	23 1/2
6 3/4	21 1/4	7 3/4	24 1/4
7	22	8	25
7 1/4	22 3/4	8 1/4	25 3/4
		8 1/2	26 1/2
Tolerance	+ 3/8 - 1/4 inch	Tolerance	+ 3/8 - 1/4 inch

Workmanship. After completion, the finished hats shall be thoroughly clean, and all loose thread, lint, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Examination. Hat lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The hats shall be examined for the defects listed below. The lot size shall be expressed in units of hats. The sample unit is one hat. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0.

Defects. The hats shall be examined for the following defects: Any size hole, cut, tear, smash, misweave, needle chews, visible mend or burn; marked variation in shade between brim and crown; any spot or stain clearly noticeable; open seams skipped or broken stitches,; brim puckered, twisted or distorted; any crown piece sewn in reverse or seam cover omitted; sweatband irregular in width, joining seam of sweatband superimposed on any crown seam covering; size omitted, incorrect or illegible, size and/or contract marking improperly placed; rows of continuous stitching not evenly spaced or irregular, and the hat not fabricated in accordance with the product demonstration model

Dimensional Examination. The finished hats shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one hat; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT cont.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 5034 - Breaking strength
ASTM-D 3776 - Weight per square yard, ounce

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC 61 - Colorfastness to laundering
AATCC 15 - Colorfastness to perspiration
AATCC 16 - Colorfastness to light
AATCC 8 - Colorfastness to crocking
AATCC 135 - Dimensional stability

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

Source for the nonwoven interlining is the Pellon Company, 119 West 40th St., New York, NY 10018, under their style number 3790.


Custodian:
Navy - NU

Civil Agency Coordinating Activity:
GSA - FSS


Preparing Activity:
DLA - CT

Project No. 8405-0205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

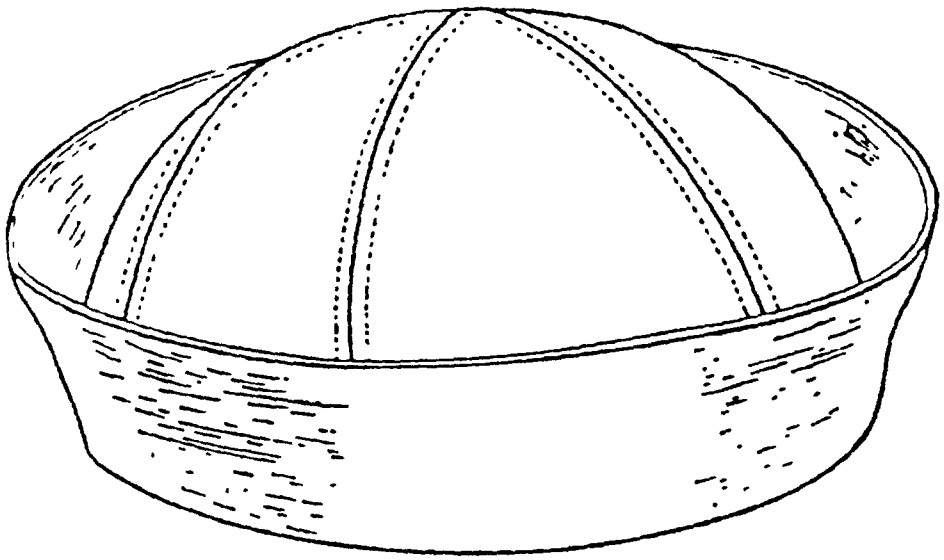


T-I ENLISTED MAN'S HAT

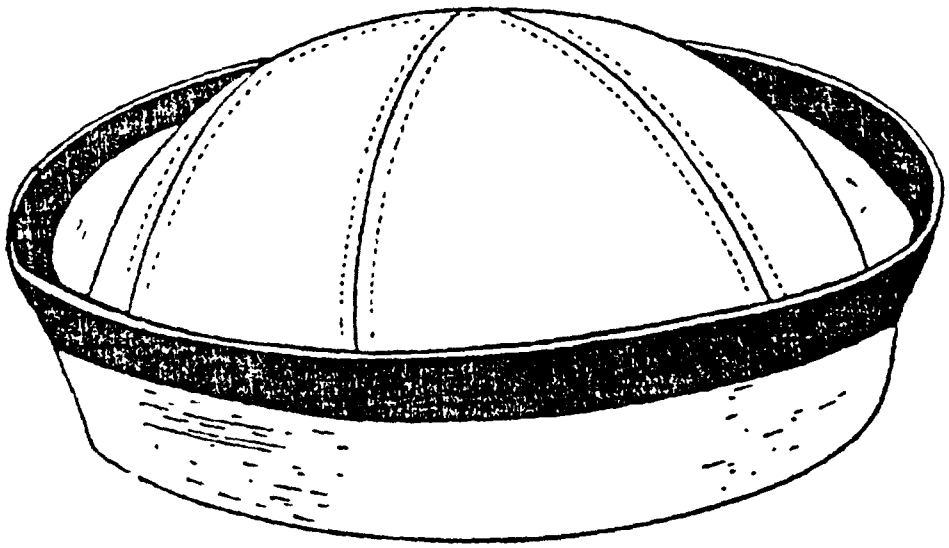

T-II MIDSHIPMAN'S HAT

Figure 1 - Hat, Service, White

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

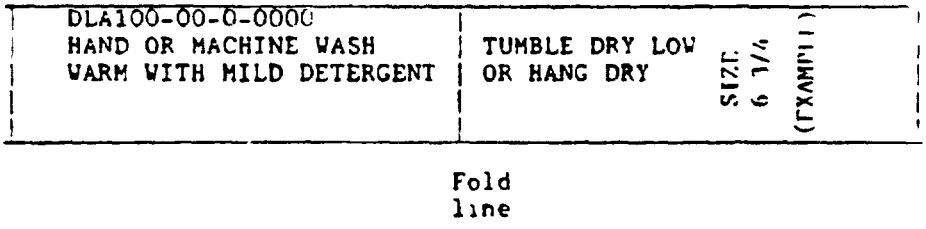

Fold line

The finished length of the label shall be 2 to 2 1/8 inches

Figure 2 - Hat, Service, White (label marking)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55108	921216

3. DOCUMENT TITLE: HAT, SERVICE (WHITE)

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (*Include Area Code*)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (*Include Zip Code*) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.