MIL-T-45593

6 July 1970

SUPERSEDING
(See section 6)

MILITARY SPECIFICATION

TRIGGER: WINTER ASSEMBLY, XM152

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of winter trigger assembly for use on the M14A1 rifles when wearing artic gear (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Military	
MIL-P-116	Preservation, Methods of.
MIL-w-13855	Weapons: Small Arms and Aircraft Armament Subsystems, General Specification for.
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of.

STANDARDS

Military		
MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109		Quality Assurance Terms and Definitions.

FSC.1005

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:29Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. Army Weapons Command

B7791208	-	Pin Straigth, Shoulder Headed,
C11010283		Trigger Winter Assembly, XM152.
C11010284		Hinge, Trigger Lever.
D11010285		Lever Trigger.

PUBLICATIONS

U.S. Army Weapons Command

P5910322	-	Packaging Data Sheet for Kit, Winter Trigger.

(Copies of specifications, standards, drawings and publications requiared by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

American National Standards Institute

ANSI-B46.1	Surface Texture

(Application for copies should be addressed to the American National Standards Institute 1430 Broadway, New York, New York, 10018.)

3. REQUIREMENTS

3.1 First article sample. Requirements for submission of a first article sample by the contractor shall be as specified in the contract (see 6.2). The first article sample shall include the pilot pack. (see 5.1).

3.2 Materials and construction. Winter triggers shall conform to the materials and construction requirements specified herein, on Drawing C11010283 and drawings applicable thereto, and shall be in accordance with the applicable materials and construction provisions of MIL-W-13855.

3.3 Design. Winter triggers shall conform to the design specified herein, on Drawing C11010283 and drawings applicable thereto, and shall be in accordance with the applicable design provisions of MIL-W-13855.

3.3.1 Functioning. The winter trigger shall actuate the rifle trigger to permit proper operation of the rifle when tested as specified in 4.4.3.3 and 4.5.1. The winter trigger, when positionedalinement with the rifle trigger and depressed to fire the rifle, shall not bind

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:29Z
Check the source to verify that this is the current version before use.

on the trigger guard and shall cause the hammer to be released. The released winter trigger shall not prevent the rifle trigger from returning to forward position under spring pressure.

3.4 Marking. Each winter trigger shall be clearly marked in accordance with the applicable drawing and the marking provisions of MIL-W-13855.

3.5 Workmanship. Workmanship shall be in accordance with the workmanship requirements of MIL-W-13855.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract OR purchase order, the supplier is responsible for performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 First article sample inspection. First article sample inspection (see 3.1) and pilot pack (see 5.1) shall be performed at the designated testing agency. First article sample and pilot pack shall be subjected to the examination and tests specified herein and such other inspection as is necessary to determine compliance with the requirements of the contract (see 6.1).

4.4 Quality conformance inspection.

4.4.1 Inspection lot. The formation, size and presentation of inspection lots of winter triggers and packaging shall be in accordance with MIL-STD-105. Inspection lots shall be as large as practicable, in consideration of quality history, manufacturing conditions, and contractor's delivery schedule, and within the limitations of MIL-W-13855. Winter triggers shall be assembled from lots of component parts that have met all inspection requirements specified herein.

4.4.2 Examination. Examination of winter triggers and packaging shall be performed in accordance with 4.4.2.3 and the applicable inspection provisions of MIL-W-13855.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:29Z
Check the source to verify that this is the current version before use.

4.4.2.1 Winter triggers. Sample size shall be in acordance with MIL-STD-105, using inspection level II

4.4.2.2 Packaging. Sample size shall be in accordance with MIL-STD-105, using inspection level I.

4.4.2.3 Classification of defects. Classification of defects and acceptable quality levels (AQL's) for examination in accordance with MIL-STD-105 shall be as specified herein and shall include the following provisions:

(a) The AQL listed for each defect shall be applied to the individual defect, not to a group of defects.
(b) The term "Coml Std Gage" under "Inspection method" indicates commercial standard measuring equipment such as micrometers, size blocks, etc.
(c) Listings under "Drawing and dimension" are given only as an aid in locating surfaces specified.
(d) Where "Visual-Measure" is specified as the method of inspection in determining surface roughness requirements, inspection shall be in accordance with ANSI B46.1.
(e) Marination for workmanship defect shall include missing operations and the presence of nicks, burrs, scratches, tool marks or other signs of poor workmanship on important areas. Pieces shall be carefully compared with a specimen of known acceptable quality, and shall conform to the requirements of 3.5.
(f) Examination for packaging defects specified in 4.4.2.3.2 shall apply to each winter trigger kit or container, as applicable.

4.4.2.3.1 Trigger, Winter Assembly, XM152 (Drawing C11010283). See 4.4.2.3.2 for examination of packaging.

Categories	Defect	AQL	Inspection method	Drawing and dimension
Critical:	None defined.			
Major:				
101	Missing or improperly assembled parts.	0.65	*Visual-Manual	

*Pin shall be riveted over securely. Hinge shall pivot freely through its full range of travel. The lever shall be securely welded.

Minor:				
201	Missing or improper protective coating. (Bright surfaces shall be touched up after riveting in accordance with MIL-W-13855).	1.5	Visual	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:29Z
Check the source to verify that this is the current version before use.

Categories	Defect	AQL	Inspection method	Drawing and dimension
202	63/Surface roughness requirement not met (pin, straight, shoulder, headed).	1.5	Visual-Measure	B7791208
203	Missing or improper marking.	1.5	Visual	D11010285
204	Missing serrations.	1.5	Visual	C11010284
205	Location, front of serrations, over.	1.5	Visual	C11010284 .55+ .01
206	Length of hinge slot) under.	1.5	Visual	C11010284 .78+ .02
207	Width of slot, under (hinge).	1.5	ComlStd Gage	C11010284 .15 + .01
208	Workmanship (see 3.5).	4.0	Visual	

4.4.2.3.2 Packaging. Unless otherwise specified in each listed defect, the packaging requirements are specified on Packaging Data Sheet P5910322 (see 5.2).

Categories	Defect	AQL
Critical:	None defined.	
Major:		
101	Illegible or incorrect marking.	1.0
102	Improper level of packaging or packing (see procurement documents).	1.0
103	Inadequate cleaning and drying.	1.5
104	Improper preservative application and drainage.	1.5
105	Improper wrapping.	1.5
106	Improper closure if interior packages.	1.5
107	Improper containers.	1.5
108	missing parts.	1.5
109	Improper closure and strapping of shipping containers.	1.5

4.4.3 Testing. In addition to the applicable test provisions specified in MIL-W-13855 and other tests required by applicable drawings and specifications, the following tests shall apply. Unless otherwise specified herein, tests shall be performed on samples taken from each inspection lot. Test fixtures and equipment shall be in accordance with Government drawings or, in the absence of drawings, shall be approved by the procuring agency.

4.4.3.1 Material testing. Tests required by applicable drawings and specifications shall be performed on materials used in the manufacture of winter triggers. The contractor shall furnish the Government representative certified copies of chemical and check analyses and reports of physical tests as may be required for each lot of each material used. The contractor shall also furnish the Government representative certification that the materials used in packaging conform to the applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:29Z
Check the source to verify that this is the current version before use.

4.4.3.2 Accelerated corrosion testing. Accelerated corrosion testing shall be made in accordance with applicable drawings and specifications.

4.4.3.3 Functioning testing. Samples of winter triggers shall be taken from each inspection lot in accordance with MIL-STD~105 using inspection level S-2, and shall be tested by the contractor using the test method specified in 4.5.1. Acceptance shall be based on an AQL of 0.65 percent defective.

4.4.3.4 Determination of cleanliness testing. Winter triggers shall be tested by the contractor for cleanliness using the test method specified in 4.5.2. Sampling shall be in accordance with MIL-P-116.

4.4.4 Inspection equipment. Unless otherwise specified (see 6.2) and 6.7), responsibilities for acquisition, maintenance, and disposition of acceptance inspection equipment shall be in accordance with MIL-I-45607.

4.5 Test methods.

4.5.1 Functioning test. Each sample winter trigger shall be tested for functioning requirement (see 3.3.1) by installation on an unloaded M14A1 rifle of known acceptance. The rifle stock shall be modified by the contractor in accordance with Figure 1 and approved by the Government. See Figure 1 for method of securing the winter trigger to the rifle for conducting the functioning test. The trigger mechanism shall be cocked and the winter trigger depressed manually causing the hammer to be released. This procedure shall be performed on each sample a minimum of three times.

4.5.2 Determination of cleanliness test. The Sample winter triggers shall be subjected to the determination of cleanliness test in accordance with MIL-P-116.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. The pilot pack consisting of a complete and packed unit and intermediate packages as applicable, packaged in accordance with Packaging Data Sheet P5910322 for the level of protection specified in the contract (see 6.2 and 6.5) and packed level C shall be forwarded as specified in the contract.

5.2 Preservation, packaging, packing and marking. Winter trigger kits shall be preserved, packaged, packed, and marked in accordance with the requirements of Packaging Data Sheet P5910322 for the applicable level of protection specified in the contract (see 6.2 and 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:29Z
Check the source to verify that this is the currentversion before use.

6. NOTES

6.1 Intended use. The Trigger, Winter Assembly, XM152 is for use in conjunction with the Safety, Winter, Drawing D7790903; screws Tapping, Thread Forming, Drawing B7791415; and Washer, Hinge Retaining, Drawing C7791237 when installed on the M14Al rifle.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Lists of drawings and specifications pertinent to the XM152 winter trigger assembly, showing applicable revision dates.
c. Requirements for first article sample and pilot pack (see 3.1 and 5.1).
d. Selection of applicable levels of preservation, packaging, and packing (see 5.2).
e. Quantities per shipping container if other than specified (see Packaging Data Sheet P5910322).
f. Place of final inspection and acceptance (see “Notes” in MIL-W-13855).
g. Responsibility for furnishing applicable rifle for functioning test (see 4.5.1).
h. Disposition of Government furnished property.
i. Responsibilities for acquisition, maintenance, and disposition of acceptance inspection equipment, if different (see 4.4.4 and 6.7).

6.3 When action by a testing agency is required, work programing will be effected with the testing agency at the earliest practicable date.

6.4 Supersession data. This specification includes the requirements of Springfield Armory Purchase Description SAPD-306 dated 31 January 1966.

6.5 Winter trigger kit. When the Winter Trigger Assembly: XM152 is packaged with Safety, Winter, Drawing D7790903; Screw, Tapping) Thread Forming, Drawing B7791415; and Washer, Hinge Retaining, Drawing C7791237; packaging should be in accordance with Packaging Data Sheet P5910322.

6.6 When warranted, the contract should specify the application of MIL-Q-9858 or MIL-I-45208, as appropriate, on the Management Control Systems Summary List, DDForm 1660.


6.7 Unless otherwise specified (see 6.2.i), the contract should specify the application of MIL-I-45607 and MIL-c-45662 On the Management Control Summary List, DD Form 1660.

Custodian:
Army - WC
Air Force - 84

Preparing activity:
Army - WC

Project Number:
1005-389

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T03:29Z
Check the source to verify that this is the currentversion before use.

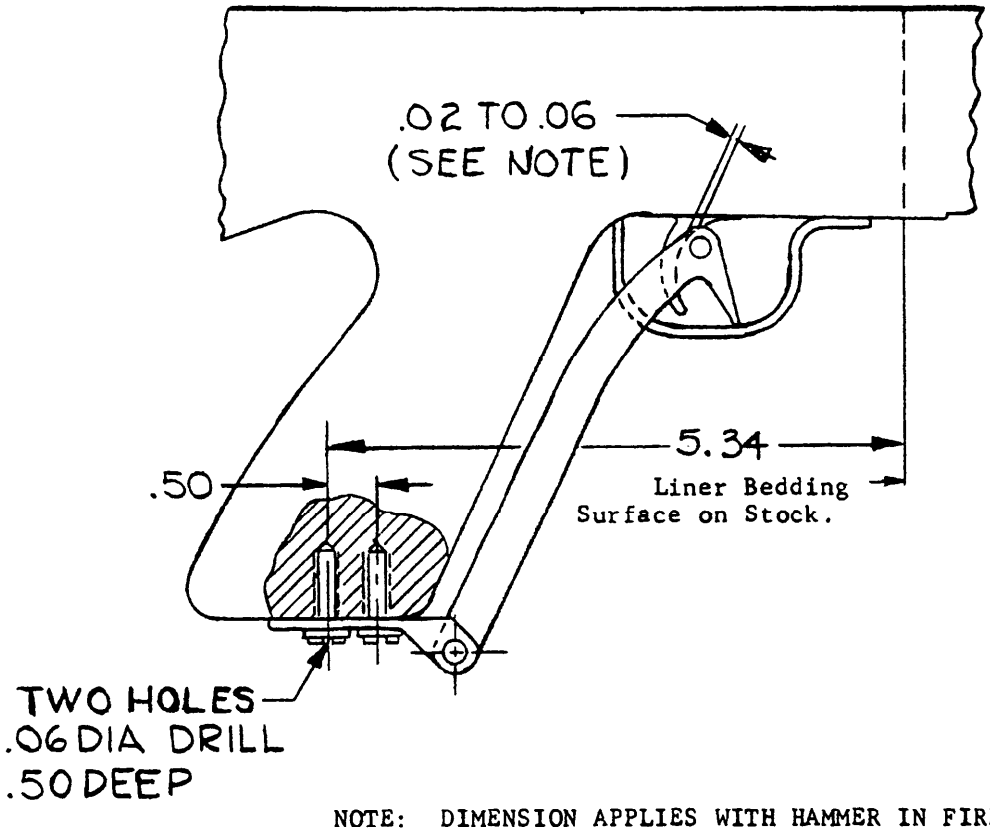

NOTE: DIMENSION APPLIES WITH HAMMER IN FIRED POSITION AND PRONG END IN LINE WITH BOTTOM OF TRIGGER GUARD AS SHOWN.

FIGURE 1

Stock modification and method of securing TRIGGER, WINTER ASSY: XM152 to M14A1 stock for conducting function test.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:29Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-T-45593 Trigger: Winter Assembly, XM152

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:29Z
Check the source to verify that this is the current version before use.