NOT MEASUREMENT SENSITIVE


MIL-B-41809/12D
14 May 1990
SUPERSEDING
MIL-B-41809/12C
31 December 1978

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, PERMANENT PROFESSOR, US AIR FORCE ACADEMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809

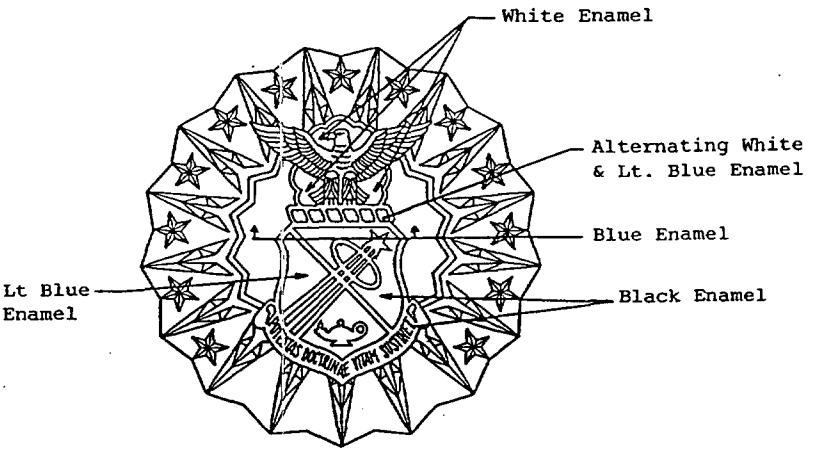

MATERIAL: Gilding metal

DIMENSIONS:

BASE:
- CIRCUMSCRIBED DIAMETER: 2-1/2 inch (6.35 cm) (REF)
- THICKNESS (Edge): .060 inch ± .005 inch (0.152 cm) ± (0.012 cm)

DEVICE:
- HEIGHT (Overall): 1-21/32 inch (4.21 cm) (REF)
- WIDTH (At scroll): 1-3/32 inch (2.78 cm) (REF)
- THICKNESS (Eagles breast): .100 inch ± .005 inch (0.254 cm) ± (0.012 cm)

FINISH:

BASE: Hard enameled, nickel plated, silver plated, oxidized, relieved, matte finish

DEVICE: Hard enameled, gold plated, shield and wreath mirror-like polished, eagle and cloud matte finish with polished highlights (see note 2)

NOTES:

1. Enamel areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Lt. Blue	30
Black	26
White	28

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.

2. The white enamel in the cloud shall be flooded in and shall not be stoned. Care should be taken to insure the flooded enamel does not cover any portion of the eagle or the gold outline of the cloud.
3. Attaching device shall be prong and clutch type. Three prongs shall be located on a 2 inch (5.08 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located at the top of the vertical centerline of the base.
4. The device shall be superimposed and secured to the base by two rivets or soft soldered. The rivets shall be soldered to the vertical centerline of the device. The vertical center line of the device shall be located on the vertical center line of the base with the tip of the scroll 7/16 inch + 0, - 1/32 inch (1.11 cm) + 0, - (0.08 cm) above the bottom of the badge.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor. When epoxy resin is used, rivets shall be used to attached the device to the base.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
Air Force - 99
DLA - CT

(Project No. 8455-0488)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.