NOT MEASUREMENT SENSITIVE


MIL-B-41809/12E
13 September 1991
SUPERSEDING
MIL-B-41809/12D
14 May 1991

MILITARY SPECIFICATION SHEET

Badge, Identification, Permanent Professor, U.S. Air Force Academy

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

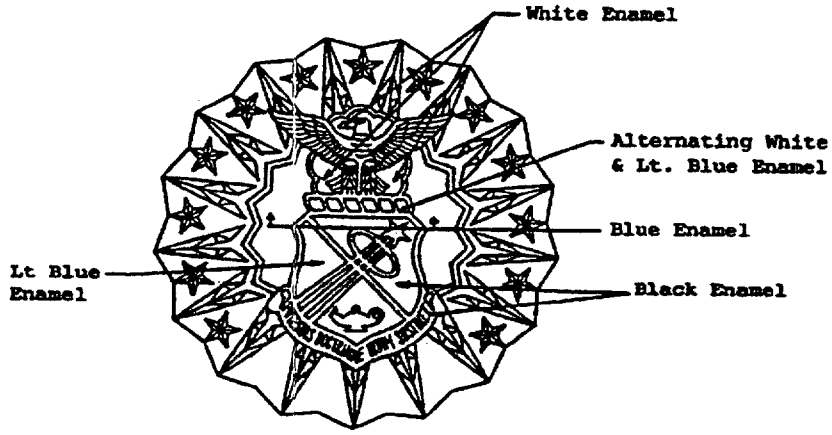

MATERIAL: Gilding metal

DIMENSIONS:
BASE:
CIRCUMSCRIBED DIAMETER: 2-1/2 inches (6.35 cm) (REF)
THICKNESS (Edge): .060 inch ± .005 inch (0.152 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall): 1-21/32 inch (4.21 cm) (REF)
WIDTH (At scroll): 1-3/32 inch (2.78 cm) (REF)
THICKNESS (Eagles breast): .100 inch ± .005 inch (0.254 cm ± 0.012 cm)

FINISH:
BASE: Hard enameled, nickel plated, mirror-like polished
DEVICE: Hard enameled, gold plated, mirror-like polished

NOTES:
1. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Lt. Blue	30
Black	26
White	28

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.

2. The white enamel in the cloud shall be flooded in and shall not be stoned. Care should be taken to insure the flooded enamel does not cover any portion of the eagle or the gold outline of the cloud.
3. The attaching device shall be prong and clutch type. Three prongs shall be located on a 2 inch (5.08 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located at the top of the vertical centerline of the base.
4. The device shall be superimposed and secured to the base by two rivets or soft soldered. The rivets shall be soldered to the vertical centerline of the device. The vertical centerline of the device shall be located on the vertical centerline of the base with the tip of the scroll 7/16 inch + 0, -1/32 inch (1.11 cm + 0, - 0.08 cm) above the bottom of the badge.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor. When epoxy resin is used, rivets shall be used to attach the device to the base.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-N620)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.