NOT MEASUREMENT SENSITIVE


MIL-B-41809/13C
14 May 1990
SUPERSEDING
MIL-B-41809/13B
31 December 1978

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, RECRUITING SERVICE, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

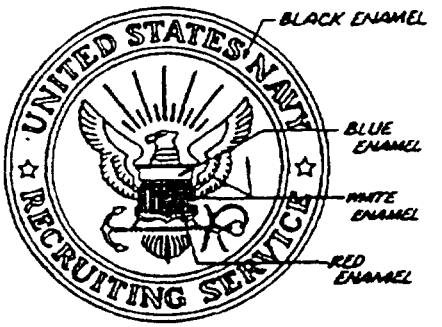

MATERIAL: Gilding metal

DIMENSIONS:
DIAMETER: 2-5/8 inch (6.67 cm) (REF)
THICKNESS (Edge): .075 inch ± .005 inch (0.190 cm) ± (0.012 cm)

FINISH: Hard enameled, gold plated, mirror-like polished finish

NOTES:
1. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
Blue	20
Red	1
White	28

2. Attaching device shall be prong and clutch type. Three prongs shall be located on a 2-1/2 inch (6.35 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical centerline at the top of the badge.
3. The badge shall be spherically dapped 1/8 inch, ± 1/32 inch (0.32 cm) ± (0.08 cm) when measured on the reverse.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolate inhibitor.

Custodian:
Army - IH
Navy - SA

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0489)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.